


COMICA

PROFESSIONAL AUDIO EQUIPMENT

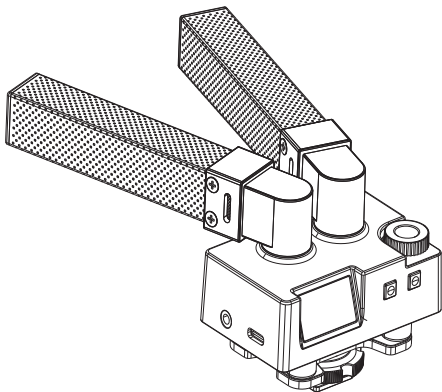

Traxshot **PRO**

Super Cardioid Transformable All-in-One Shotgun Mic

User Manual

Foreword

Thanks for purchasing COMICA Traxshot PRO All-in-One Shotgun Microphone

Main Features


- Super Cardioid Pattern, Broadcast Sound Quality
- Automatic/Programmable Manual Multi-pickup Modes with Intelligent Switch
- Digital/Analog Output Mode, Universal for Camera, Phone and Computer
- Intelligent Auto-sensing 3.5mm Output and Power Switch
- Innovative and Effective Air-float Shock-absorption Design
- IPS Screen for Intuitive Power, Audio Dynamic, Pickup Mode
- Support Real-time Monitor, Gain Control and Two Stage Low-cut Filter
- Built-in Rechargeable Battery, Battery Life Up to 22 hours
- Support USB-C Port to Upgrade System Firmware
- Internal Windproof Design, Effectively Reduce Basic Wind Noise
- High-density Wind Muff, Effectively Filter the High-level Wind Noise

Notice

- ⚠ Some cameras can't identify the 3.5mm TRRS-TRRS audio cable, please use the 3.5mm TRS-TRS audio cable
- ⚠ When using with iOS devices, please buy the related OTG audio adapter cable by yourself
- ⚠ The stereo is automatically merged into mono when working with smartphones and laptops in stereo mode of analog output
- ⚠ At 180° pickup angle in A/PS pickup mode, Mic 1 should be used in the rear and Mic 2 in the front
- ⚠ For Android smartphones, Traxshot PRO works well in audio mode, it may not be compatible with partial smartphones with system versions lower than Android 12.0 (Then we suggest you to try the 3rd party APP, such as TikTok, Filmic Pro, ect.)
- ⚠ For iPhones, Traxshot PRO works well either in audio or video mode


Packing List

Main Parts:




Traxshot PRO


Accessories:




3.5mm TRS-TRS Audio Cable



3.5mm TRRS-TRRS Audio Cable



2 in 1 Audio Cable



Wind Muff



Portable Package




User Manual



Warranty Card

Traxshot PRO

1. Mic2 Capsule
2. Mic1 Capsule
3. IPS Display
4. Pickup Mode Switch Button
5. Power/LCF Switch Button
6. Gain Control Knob
7. 3.5 mm TRS/TRRS Audio Output Port
8. 3.5mm TRS/TRRS Monitoring Port
9. USB-C Charging&Upgrading&Audio Output Port
10. Reset Hole
11. Locking Screw
12. 1/4 Thread Hole
13. Cold Shoe

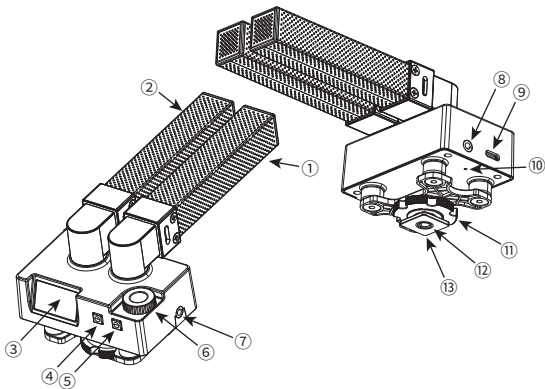

1. Power/LCF Switch Button

Long press to turn on/off the Traxshot PRO, short press to switch 75/150Hz two-grade low cut filter.



Traxshot PRO features an auto-power function that automatically turns the microphone on/off when it detects that the camera/USB device is switched on/off. It also features a power button, so that it can be manually powered on and off in unrecognized situations.

2. Pickup Mode Switch Button

Short press to switch A/PM/PS three pickup modes; 'A mode' means automatic pickup mode, which automatically switches to mono or stereo according to the pickup angle of the microphone; 'PM mode' means programmable mono pickup mode, which delivers mono audio at any pickup angle; 'PS mode' means programmable stereo pickup mode, which delivers stereo audio at any pickup angle.



MODE

3. Gain Control Knob

Adjust the mic gain and monitor volume via the knob.



4. 3.5mm TRS /TRRS Audio Output Port

Connect corresponding devices via 3.5mm TRS-TRS/TRRS-TRRS audio output cable.

OUT



5. USB-C Charging&Upgrading&Audio Output Port

Plug in 2 in 1 audio output cable for charging, upgrading and audio output.



The upgrade method is as follows:

- 5.1 Long press the MODE button of Traxshot PRO to enter upgrade interface;
- 5.2. Connect the Traxshot PRO to the computer via USB-C cable;
- 5.3. Copy the new firmware file of Traxshot PRO to the corresponding disk;
- 5.4. Unplug the USB-C cable after the computer ejects the USB flash disk;
- 5.5. Turn off Traxshot PRO and Turn on Traxshot PRO again to use new firmware.

6. 3.5mm TRS/TRRS Monitoring Port

Plug in 3.5mm TRS/TRRS headphone for monitoring.




7. Reset Hole

Plug in needle-shaped objects for resetting Traxshot PRO.

○ **RESET**

Screen Display:

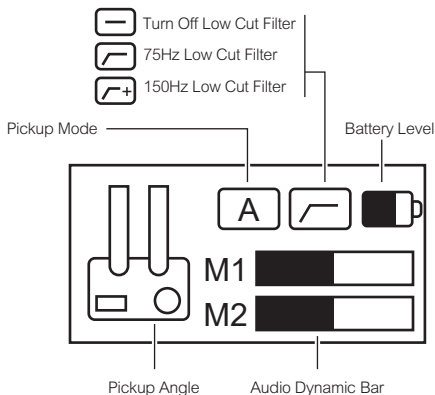

The Symbol of Sound Pickup Angle :



0° Pickup Angle



30° Pickup Angle



90° Pickup Angle



180° Pickup Angle

Pickup Mode :



'A mode' means automatic pickup mode, which automatically switches to mono or stereo according to the pickup angle of the microphone. It delivers mono audio at 0° pickup angle, stereo audio at 30°/90°/180° pickup angle.



'PM mode' means programmable mono pickup mode, which delivers mono audio at any pickup angle.





'PS mode' means programmable stereo pickup mode, which delivers stereo audio at any pickup angle.



The stereo is automatically merged into mono when working with smartphones and laptops in stereo mode of analog output.

Analog Mode:


Connect the camera/ computer/ phone via the 3.5mm TRRS-TRRS audio cable; Choose whether to monitor according to your needs.

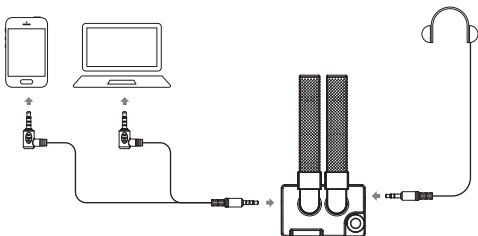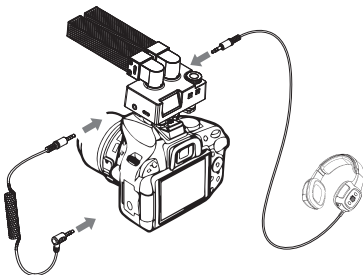

Some cameras can't identify the 3.5mm TRRS-TRRS audio cable, please use the 3.5mm TRS-TRS audio cable.

Digital Mode:

Connect the computer/ phone via the the 2 in 1 audio cable and related OTG audio cables/adapters; Choose whether to monitor according to your needs.

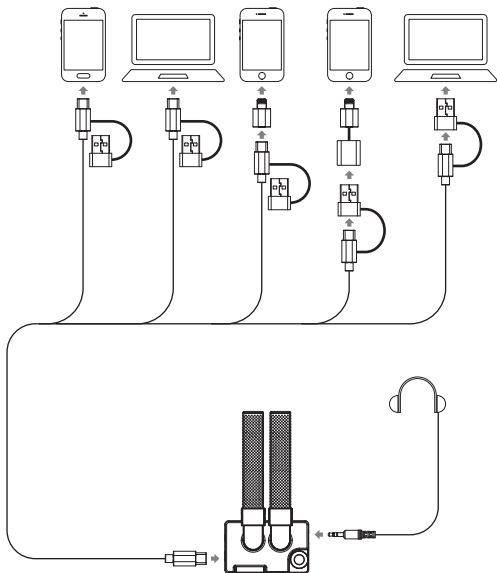

Specification

Polar Pattern	Super Cardioid
Frequency Response	20Hz ~ 20kHz
Sensitivity	-38dB ~ -18dB
Low Cut	75Hz / 150Hz
Output Impedance	600Ω
S/N	75dB
Equivalent Noise	19dBA
Maximum SPL	130dB SPL
Dynamic Range	111dB
Analog Output Port	3.5mm TRS / TRRS
Digital Output Port	USB-C / 48kHz 24bit
Monitoring Port	3.5mm TRS / TRRS
Battery Capacity	Lithium 3.7V 330mAh
Battery Life	22 Hours
Net Weight	250g
Dimension	150 x 80 x 75mm
Working Temperature	0°C ~ 50°C
Storage Temperature	-10°C ~ 60°C



Website: comica-audio.com

Facebook: Comica Audio Tech Global

Instagram: Comica Audio

YouTube: Comica Audio

