
GABOR®

GPW-50 / LEVITOUCH SINGLE ARM

MONITOR WALL MOUNT


for 17 to 32 in. Displays

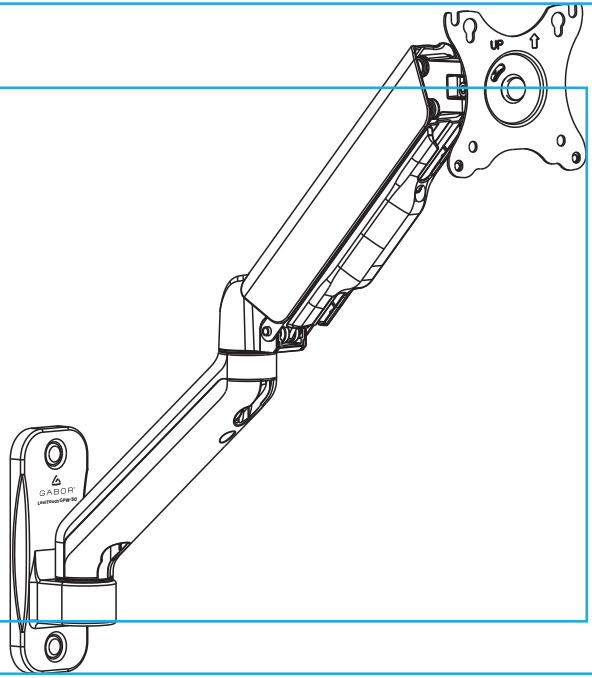

User Manual

Thank you for choosing Gabor.

The Gabor Levitouch wall-mount monitor arm will support a monitor from 17 to 32 inches that weighs up to 19.8 pounds. This monitor arm is designed to be inconspicuous and take up minimal wall space while it offers optimum viewing angles whether you're sitting or standing. The articulating arm has adjustable gas-spring tension that ensures monitor stability and glides into place when changing the monitor's height, tilt, and orientation. Once it's positioned, it will stay in place without slipping or shifting. The arm's VESA plate accommodates monitors with 75 × 75 and 100 × 100 VESA patterns.

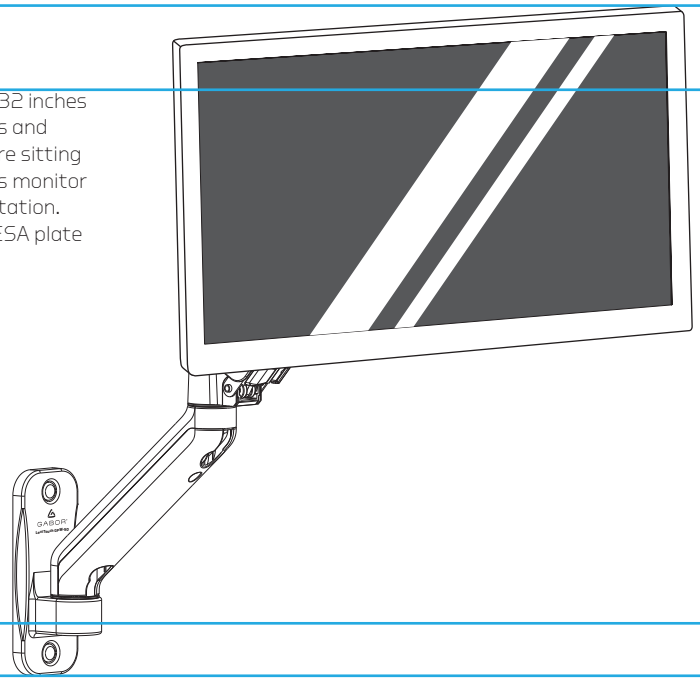

Safety Warnings

- Please read and follow the instructions, and keep this manual in a safe place.
- When installing this product, be sure to refer to the mounting instructions detailed in this manual; failure to abide by the mounting instructions may void the product's warranty.
- Do not use this product for uses other than those intended; the exact specification, size parameters, and weight limits are found both on the product box and in the instruction manual.
- Gabor takes no responsibility for any product damage or personal injury resulting from mishandling, incorrect mounting, faulty assembly, or improper use of this product.
- This product may contain small parts which can possibly pose a choking hazard; keep out of reach of children and pets.
- The supplied mounting hardware is not intended for use on metal studs or cinderblock walls, and may not be appropriate for old or weak walls; it is best to consult with a qualified professional to determine whether your wall is capable of supporting this bracket.
- Do not mount the device on structures that may be affected by vibrations or noticeable impacts; do not install near a heater, fireplace, or any other source of direct heat energy.
- Clean this product with only a soft, dry cloth.
- All images are for illustrative purposes only.

Product Specifications

Monitor Display Size
17 to 32 in. (43.2 to 81.3 cm)

Load Capacity
4.4 to 19.8 lb. (2 to 9 kg)

VESA Standards
75 × 75 mm
100 × 100 mm

Monitor Orientation
±180°

Monitor Tilt
+90°, -45°

Monitor Rotation
±90°

Arm Swivel
180°


Arm Reach
3.5 to 21.2 in. (8.9 to 53.9 cm)



Weight (without monitor)
3.3 lb. (1.5 kg)



Overview


Required tools:

Scissors
Level
Pencil
Drill
Socket Wrench
Optional: Stud finder

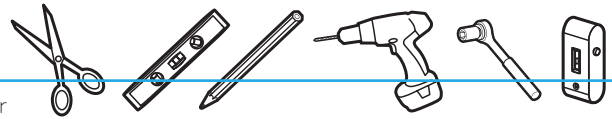

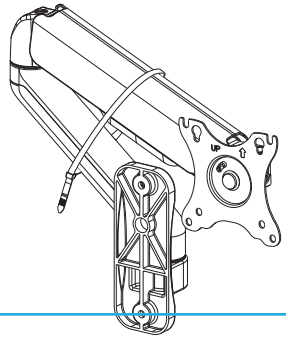A 1X	B 2X	C 1X
		


PARTS FOR MOUNTING ON A WALL		
W-A 2X	W-B 2X	W-C 2X
		

PARTS FOR MOUNTING A MONITOR		
M-A 4X	M-B 4X	M-C 4X
		
M4 × 12	M5 × 12	D5

Mounting the Monitor

Unpacking

Important!
We recommend that two people perform these steps.

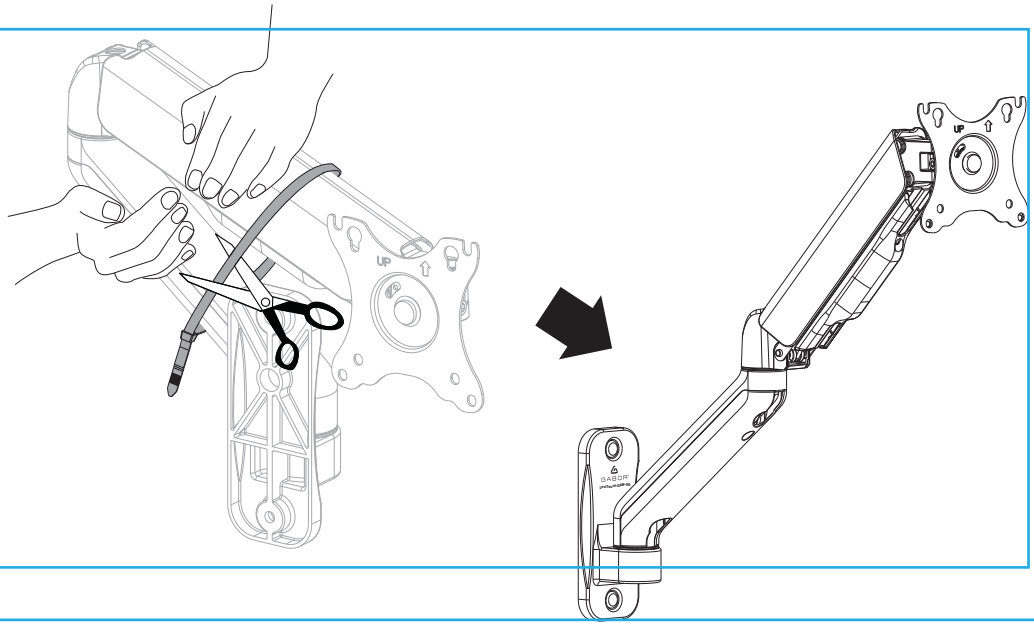


Use Caution Unpacking the Arm

Hold the two halves of the arm together while another person cuts the packing cable.

Slowly release the pressure on the spring arm and allow it to gradually stretch to its full extension.


Attaching the Arm to a Wall

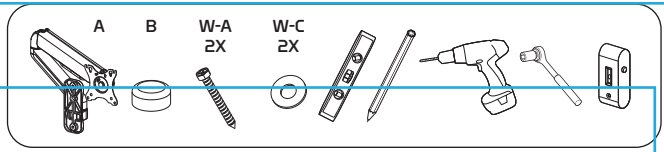


Wood Wall Studs

Optional: Use a stud finder to locate the studs in the wall.


1. Mark the stud location with a pencil.
2. Place a level along the side of the mounting plate, and use the plate as a template to mark the location of the holes.

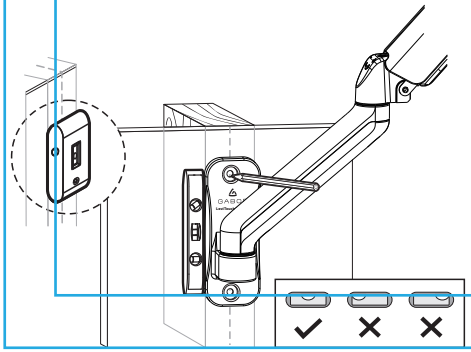


3. Use a 3/16-inch (4.5 mm) bit to drill a hole 2.2 inches (55 mm) deep.

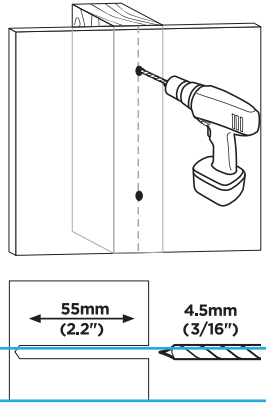


4. Attach the arm to the wall with the washers (W-C) and screws (W-A).

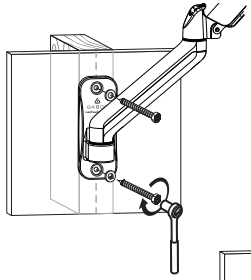


5. Once the Arm is attached, place the caps (B) into the holes.

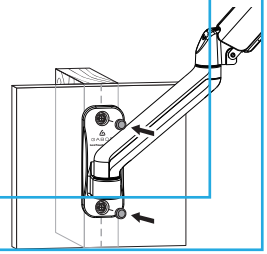


Masonry or Concrete Wall

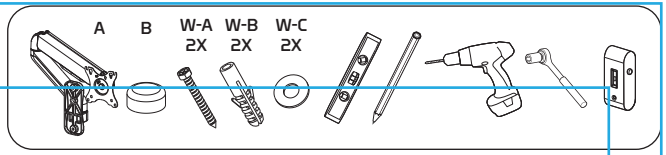


1. Place a level along the side of the mounting plate, and use the plate as a template to mark the location of the holes.

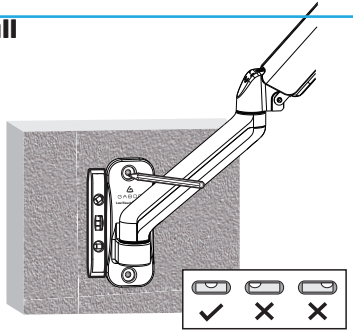


2. Use a 3/8-inch (10 mm) masonry bit to drill a hole 2.4 inches (60 mm) deep.

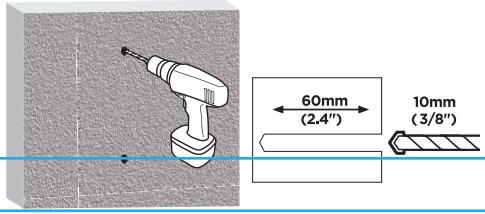

3. Tap the wall anchors (W-B) into the holes, and attach the arm to the wall with the washers (W-C) and screws (W-A).

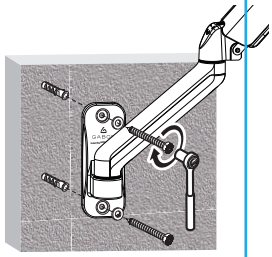



4. Once the Arm is attached, place the caps (B) into the holes.

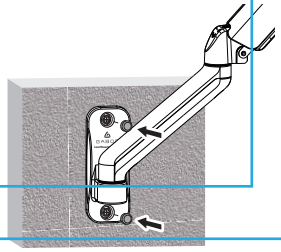


Mounting a Monitor to the Arm

Note: Hand-thread one of the M-A or M-B screws to determine which one fits your monitor.

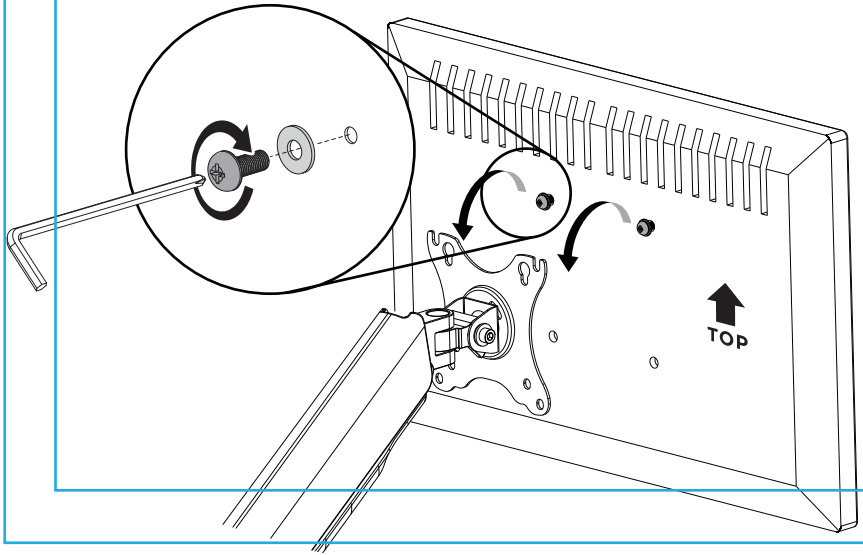


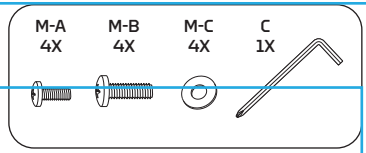


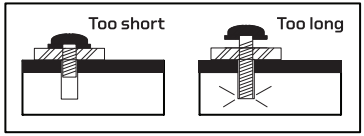



1. Slide washers M-C onto the appropriate screws.


2. Screw two of the mounting screws (M-A or M-B) into your monitor's top two VESA holes with a Phillips screwdriver. Do not screw them in all the way. Leave approximately 3 mm between the screw and the monitor.




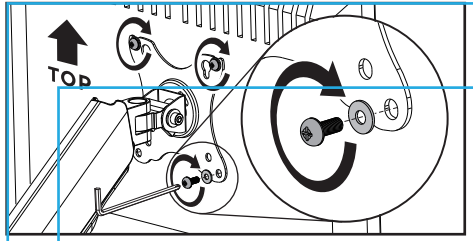

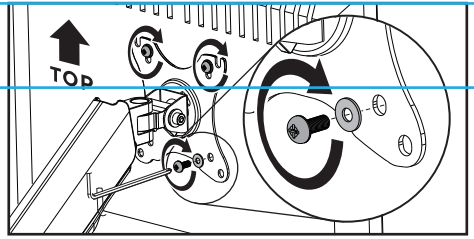

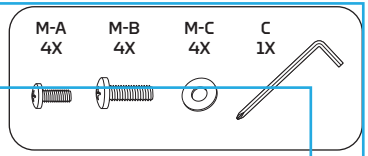

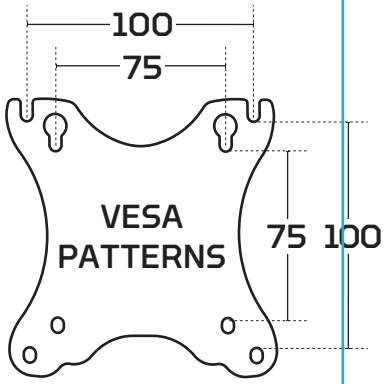



100 × 100 VESA Pattern

1. Use the two installed mounting screws to hang the monitor on the VESA plate's two top notches.

Important! The washer (M-C) should be between the screwhead and the VESA plate.

2. Screw the two remaining mounting screws (M-A or M-B) and washers (M-C) through the bottom two VESA holes.

3. Tighten the mounting screws with the hex wrench (C) or a Phillips screwdriver.

75 × 75 VESA Pattern

1. Use the two installed mounting screws (M-A or M-B) and washers (M-C) to hang the monitor from the VESA plate's two keyholes.


2. Screw the two remaining mounting screws (M-A or M-B) and washers (M-C) through the lower two 75 mm VESA holes.

3. Tighten the mounting screws with the hex wrench (C) or a Phillips screwdriver.


Important! The screws should be tightened until snug. Don't overtighten.

Adjusting the Arm's Gas-Spring Tension

When the arm is adjusted to the ideal tension, it will hold the monitor in position indefinitely.

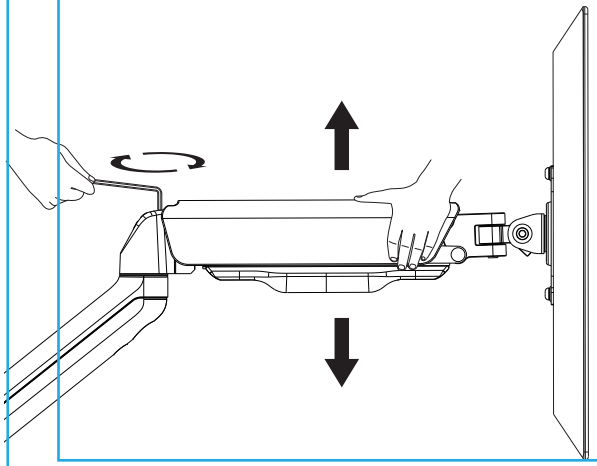


To adjust the arm's tension, follow these steps:




Support the monitor with one hand, and position the arm and monitor so the arm is horizontal.



If the arm drops due to the weight of the monitor, use the hex wrench (C) to turn the adjustment screw counterclockwise toward the + icon.



It the arm rises, use the hex wrench to turn the adjustment screw clockwise toward the - icon.




Important! Do not overtighten or overloosen the tension adjustment screw.

To avoid damage to the monitor or mount, always support the monitor with one hand, and keep the arm in a horizontal position while making adjustments.

Adjusting the Monitor Tilt Angle


If the tilt angle of the monitor won't move, use the hex wrench (C) to slightly loosen the screws on both sides of the VESA plate.

Adjust the screen tilt angle, and retighten the screws.

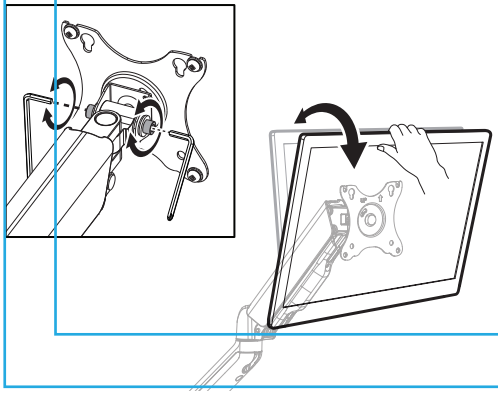

Adjusting the Arm Swivel Tension


Adjust the swivel tension by tightening or loosening the two adjustment screws at both ends of the lower arm with the hex wrench (C).

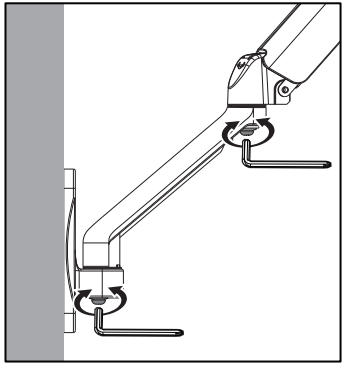

Cable Organization

After the monitor is installed, keep your cables neat and organized by running them through the cable channel on the column.

Use the hex wrench (C) or a Phillips screwdriver to remove the screws that hold the cable channel covers in place. Bundle your cables through the channel, and screw the cable channel covers back on.

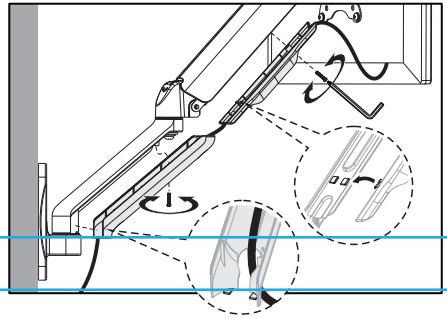

One-Year Limited Warranty

This Gabor product is warranted to the original purchaser to be free from defects in materials and workmanship under normal consumer use for a period of one (1) year from the original purchase date or thirty (30) days after replacement, whichever occurs later. The warranty provider's responsibility with respect to this limited warranty shall be limited solely to repair or replacement, at the provider's discretion, of any product that fails during normal use of this product in its intended manner and in its intended environment. Inoperability of the product or part(s) shall be determined by the warranty provider. If the product has been discontinued, the warranty provider reserves the right to replace it with a model of equivalent quality and function.

This warranty does not cover damage or defect caused by misuse, neglect, accident, alteration, abuse, improper installation or maintenance. EXCEPT AS PROVIDED HEREIN, THE WARRANTY PROVIDER MAKES NEITHER ANY EXPRESS WARRANTIES NOR ANY IMPLIED WARRANTIES, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. This warranty provides you with specific legal rights, and you may also have additional rights that vary from state to state.

To obtain warranty coverage, contact the Gabor Customer Service Department to obtain a return merchandise authorization ("RMA") number, and return the defective product to Gabor along with the RMA number and proof of purchase. Shipment of the defective product is at the purchaser's own risk and expense.

For more information or to arrange service, visit www.madebygabor.com or call Customer Service at 212-594-2353.

Product warranty provided by the Gradus Group.

www.gradusgroup.com

Gabor is a registered trademark of the Gradus Group. © 2024 Gradus Group LLC. All Rights Reserved.

GABOR®
A Gradus Group Brand

GG2