



WBM6TA Installation Sheet

1. Screw speaker to wall
2. Insert your source into the “Input” 3.5mm female connector
3. Insert your power supply (PSW5 not included) into power connector. The indicator will light red when powered.
4. Adjust volume to desired level via knob.

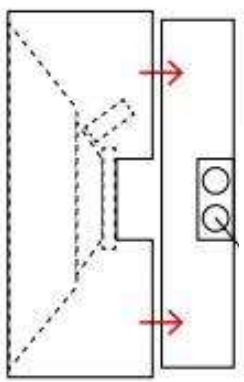

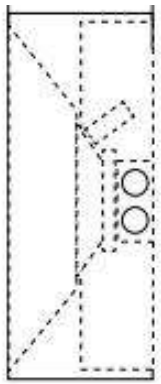

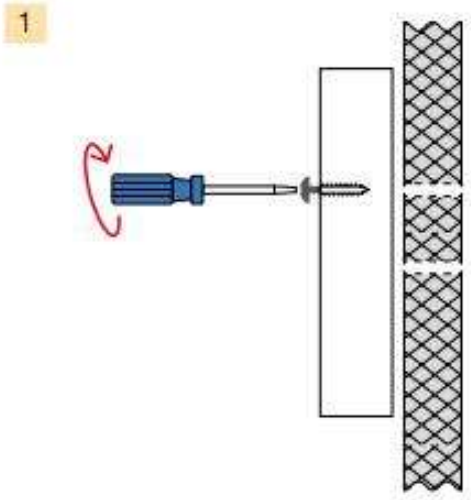

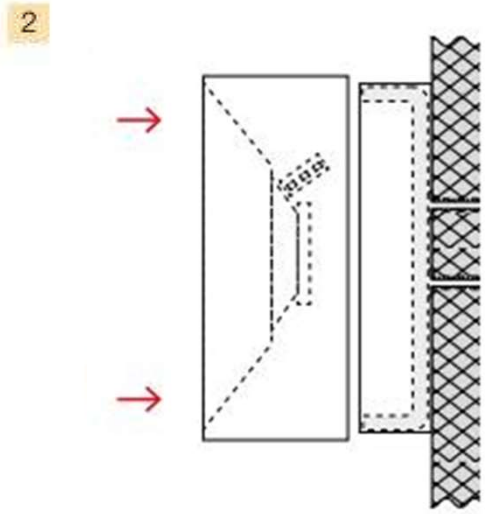

Speco Technologies . 200 New Highway . Amityville . NY . 11701 . www.specotech.com

Rev. 5/6/22