SHIMBOL

Wireless Video Transmission System

Item Model: TP MAX

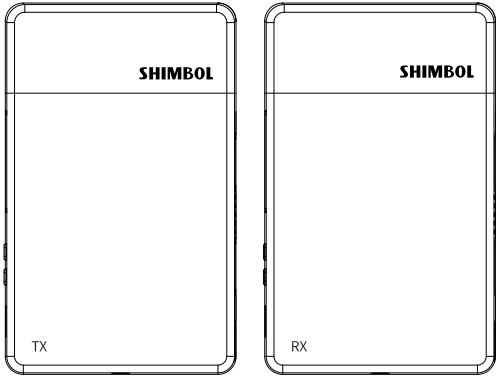

Instruction Manual

Shenzhen ZO Video Technology Co., Ltd.

01/Features



Transmit Range



Built-in Antenna



Latency



Ultra-low-Power



Multiple Power Supply



LED Display
Status Light

02/Packing list

1. Transmitter*1
2. Receiver*1
3. User Manual*1
4. USB Power Cable*2
5. Sticker*2

03/Technical Parameters

	Transmitter	Receiver
Interface	HDMI Input/HDMI Output	HDMI Output*2
Power Supply Method	USB 5V / NP-F Battery	USB 5V / NP-F Battery
Power Consumption	<3W	< 2.5W
HDMI Input	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz	/
HDMI Output	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz	720P@50/60Hz 1080I@50/60Hz 1080P@24/25/30/50/60Hz
Weight	120g	120g
Size	103*63.5*16mm	103*63.5*16mm
Transmission Frequency Band	5GHz	5GHz
Transmit Power	20dBm Max	17dBm
Transmission Delay	70ms	
Receiving Sensitivity	/	-85dBm

04/Product Description

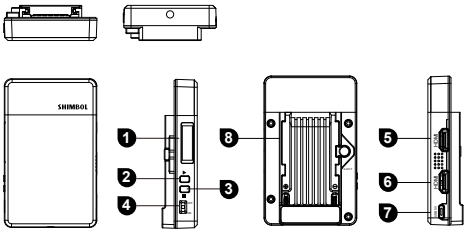

1. LED Display Status Light
2. Electric Quantity Button
3. Pairing Button
4. Power Switch
5. HDMI Output(TX/RX)
6. HDMI Input(TX)/Output(RX)
7. USB Port
8. Battery Plate

A. Press the 2 button to check the battery level, 4 green lights indicate the battery level. When connected to USB, the green light is on.

B. The pairing button is production mode, and the client does not need to pair.

220-JP7826
220-JP7828

折页

尺寸:(83x2)x118mm
材质:157铜板+双面印刷对折页
浅色虚线为对折位置

文件编号：ZO-TPMAX-ML(说明书)-英文
版本号：A0

制作：郑帅
日期：2024-09-01
审核：
材质确认：
结构尺寸确认：

深圳市零壹视讯科技有限公司
Shenzhen ZO video technology Co.,Ltd.