

Video Display

Operation Guide

DP-V1830 Firmware ver. 1.0

- Before use, be sure to read this guide, including the safety and handling precautions.
- Reading this guide will help you learn to use the video display properly.
- Store this guide safely so that you can use it in the future.

Instruction Manual

English

About the User Manual for the Display

- The product includes an Instruction Manual or Setup Guide. Before using the product, be sure to read “Important Usage Instructions” and “Safety Instructions and Handling Precautions”.
- The Operation Guide (this document) explains the functions available on the version of the firmware shown on the cover page as well as setup procedures.

Table of Content

Introduction	3	OSD Menu	19
About this manual	3	Adjustment	19
Trademarks	3	Channel Settings	34
Operating the Video Display	4	Display Settings	37
Basic operations to use the OSD menu	4	Audio Settings	39
Adjusting Image Quality While Viewing the		Marker Settings	40
Entire Image	5	Function Settings	47
Temporarily Saving Parameters (Anchor Point		Picture Function Settings	56
Setting)	7	Network/IMD Settings	60
Enlarging the display (Zoom function)	7	System Settings	61
Changing Image Quality Automatically		Signal Information	68
According to Input Signal	8	System Information	68
Changing the screen display area	8	Supported Signal Format	69
Export/Import	9	Image/Frame Display	83
Set Date/Time	11	Error Messages	86
Inputting Characters	12	Troubleshooting	89
Using the Function (F) Buttons	13	Software Used in This Product	91
Using the Channel (CH) Button	14	Index	95
Checking Signal Information and Status of the			
Main Unit	17		
Operating the video display using an external			
device [GPI terminal]	17		
Operating the video display using an external			
device [LAN terminal]	18		

The On Screen Display (thereafter referred to OSD) default language setting is English. To change the OSD menu language setting, please refer to p.61.

About this manual

The screen of the DP-V1830 is used as an example in this Guide. Some of the illustration used in the Guide have been simplified for clarity.

Conventions used in this manual

: Indicates a reference page.

 Reference: Indicates reference information.

 CAUTION: Indicates an item you must observe.

 Note: Indicates a note.

  [Adjustment]  [Picture Mode]:

Pressing the MENU button shows the OSD Menu levels. You can move between the items and select from them.

Trademarks

- HDMI, HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the U.S. and other countries.
- VESA is a registered trademark or trademark of Video Electronics Standards Association in the U.S. and other countries.
- Other product and company names herein are trademarks or registered trademarks of their respective owners.

Operating the Video Display

- 4 Using buttons and jog dial on the video display, you can adjust image quality and configure settings for input signals. In addition, you can assign frequently used functions to the CH (Channel) and F (Function) buttons.

Basic operations to use the OSD menu

The video display settings are changed from the OSD menu.

MENU button

Opens/closes the OSD menu, or moves up one level in a menu.



RESET button

Resets the items to be adjusted using the slider and entered characters.


Jog dial



or rotation: Used to move to a different item and change settings.

Press: Confirms settings or moves the selection frame up/down 1 level.

- 1 Open the OSD menu.
 - Press the MENU button.
- 2 Select the Main Menu.
 - Select the Main Menu item using the jog dial and press it to determine the selection.
- 3 Select the Sub Menu.
 - Select the Sub Menu item using the jog dial and press it to determine the selection.

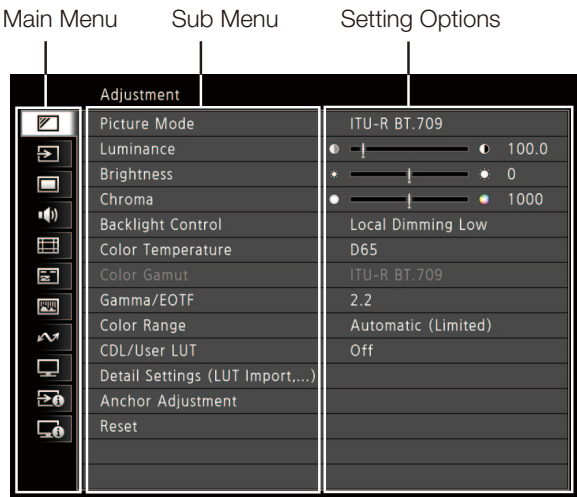

4 Select the setting to change.

- Select the setting to change using the jog dial and press it to determine the selection. You will be returned to the Sub Menu item selection screen.

5 Exit menu.

- Pressing the MENU button will return you to the Main Menu item selection screen. Pressing the MENU button again will close the menu screen.

Adjustment		
	Picture Mode	ITU-R BT.709
	Luminance	ITU-R BT.2020
	Brightness	Adobe RGB
	Chroma	DCI-P3
	Backlight Control	User 1 (2020 PQ)
	Color Temperature	User 2 (2020 HLG)
	Color Gamut	User 3 (DCI PQ)
	Gamma/EOTF	User 4 (DCI PQ D65)
	Color Range	User 5
	CDL/User LUT	User 6
	Detail Settings (LUT Import,...)	User 7
	Anchor Adjustment	User 8
	Reset	User 9
		CINEMA EOS SYSTEM
		ACESproxy (ver. 1.0.1)

5

Note

- To adjust image quality, warming-up is necessary to stabilize the brightness of the video display. Wait at least 10 minutes after turning on the power before use.
- The OSD menu and slider will disappear automatically if no operation is performed for approximately 1 minute. The function button guide will disappear automatically if no operation is performed for approximately 10 seconds.
- The settings that cannot be set, are grayed out.
- The following functions can be returned to their factory default settings or their anchor point (7) by pressing the RESET button, after adjusting the image quality.
 - [Luminance], [Brightness], [Chroma], [HDR Range], [Power], [Saturation], [Offset], [Slope]

When [Picture Mode] [User 1–9]: When executing calibration, pressing the RESET button while adjusting the image quality will return you to the settings after calibration.

Adjusting Image Quality While Viewing the Entire Image

You can adjust the OSD menu to display as a slider at the bottom of the screen. This allows for the image quality to be adjusted whilst it is displayed on the screen.


1 Press the jog dial when the selection frame is on setting options.

- A slider appears at the bottom of the screen.

2 Make adjustments using the jog dial with using the slider as guide.

3 When adjustments are completed, press the jog dial.


- The screen returns to the original OSD menu.

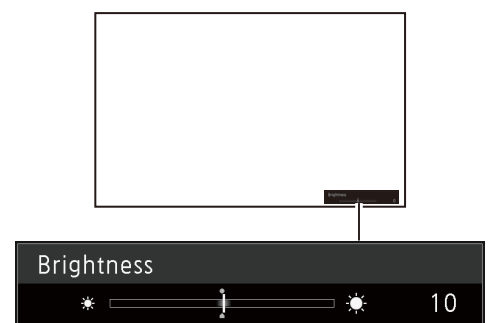

Color temperature detailed settings (gain, bias)


You can adjust RGB all at once or individually when the screens for adjusting [Gain] or [Bias] are displayed.

- 6
- 1 Select [MENU] ➡ [Adjustment] ➡ [Color Temperature].
 - [Gain R], [Gain G], [Gain B], [Bias R], [Bias G], and [Bias B] can be set individually using the jog dial (◀▶).
 - 2 Select one.
 - The setting screen for [Gain] or [Bias] will be displayed.
 - 3 Switch the guide in the upper right area of the slider screen using the jog dial (▲▼).
 - The indication changes to [RGB], [R], [G], and [B]. Selecting [RGB] will allow you to adjust RGB as a whole.
 - 4 When adjustments are completed, press the jog dial.
 - The screen returns to the original OSD menu.

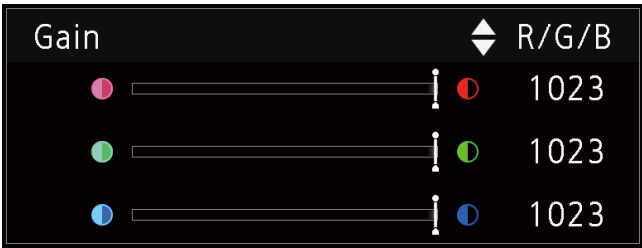

Color temperature detailed settings (xy values)


- 1 Select [MENU] ➡ [Adjustment] ➡ [Color Temperature].
- 2 Select [Custom (xy)].
 - You can set [x] and [y] individually using the jog dial (◀▶).
- 3 Select either [x] or [y].
 - The color map is displayed.
- 4 Adjust [x] with the ◀▶ and [y] with ▲▼.
 - The adjusted value is indicated by the "○" mark on the color map.
- 5 When adjustments are completed, press the jog dial.
 - The screen returns to the original OSD menu.

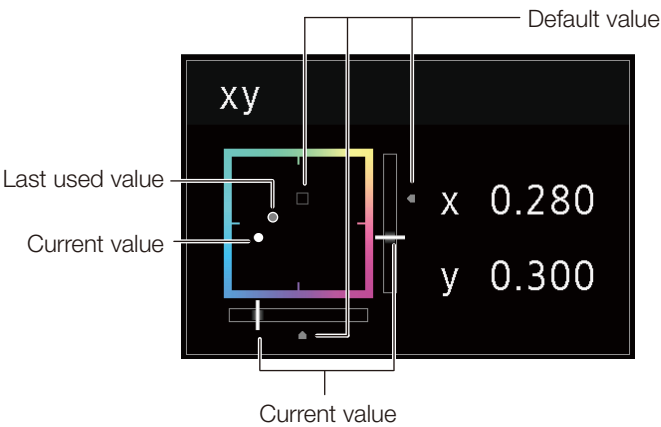

Temporarily Saving Parameters (Anchor Point Setting)

You can temporarily save parameters for [Luminance], [Brightness], [Chroma], and [HDR Range]. See 25 for setting anchor points during CDL adjustment.

- 1 Select [MENU] ➤ [Adjustment] ➤ [Anchor Adjustment].
- 2 Press the jog dial, and when the confirmation screen appears, select [OK].
 - The parameter is saved and the anchor point is set.
- 3 Adjust the image quality again and press the RESET button on the video display.
 - Returns you to the anchor point for each function.

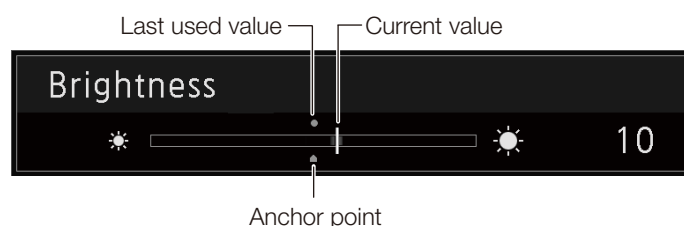

i Note


- Executing [Adjustment] ➤ [Reset] or [System Settings] ➤ [Reset All Settings] resets saved anchor points and the settings return to their factory default values.

Enlarging the display (Zoom function) (38)

The zoom display position can be adjusted, and the zoom magnification (2x, 4x, 8x) can be selected.

- 1 Select [MENU] ➤ [Display Settings] ➤ [Zoom].
- 2 Select [Zoom Preset].
 - Select a preset zoom display.
- 3 Select [Position].
 - The zoom adjustment screen is displayed.
 - To move the display position: Move the jog dial (▲▼◀▶ or rotation).
 - To return to the center: Press the RESET button.
- 4 When adjustments are completed, press the jog dial.
 - The screen returns to the original OSD menu.

Zoom 2 [x4]



i Note

- When magnifying the image and the OSD menu is not being displayed,
 - you can set the magnification ratio by pressing the jog dial.
 - You can move the display location by moving the jog dial (▲▼◀▶ or rotation).
 - You can set the following functions using the CH button:
 - CH1: Select zoom magnification; CH2: Switch between zoom presets (Zoom 1/Zoom 2/Zoom 3); CH3: Zoom off

Changing Image Quality Automatically According to Input Signal

On this video display, you can automatically change the image quality according to video resolution or metadata.

8 Changing [Picture Mode] automatically (📖 36)

- 1 Select [MENU] ➡ [Channel Settings] ➡ [Select Channel].
 - Select the channel.
- 2 Select [MENU] ➡ [Channel Settings] ➡ [Picture Mode] ➡ [Type].
- 3 Select the Type using the jog dial.
Changing by individual video resolution (4K/2K)
Select [4K/2K].
Changing according to video resolution (4K/2K) or metadata (SDI)
Select [Automatic].
- 4 Select the Picture Mode.

Changing the image quality setting according to video metadata (HDMI) (📖 28)

- 1 Select [MENU] ➡ [Adjustment] ➡ [Picture Mode] ➡ [User 1] - [User 9].
- 2 Select [MENU] ➡ [Adjustment] ➡ [Detail Settings] ➡ [HDMI Link] ➡ [Automatic Adjustment].
 - Select [On].
 - See [HDMI Link] (📖 28) for the configurable settings.

Note

- When automatic changing of image quality according to video resolution (4K/2K) or SDI metadata is set, information showing which resolution (4K/2K, etc.) is selected will be displayed at the top right of the menu screen.

Resolution: 4K

Changing the screen display area

When 4096x2160 video signal is input, the left and right sides of the image will be cropped to display an area of 3840x2160. The cropped sides can then be further adjusted on the left and right.

- 1 [MENU] ➡ Select [Display Settings] ➡ [Screen Scaling].
 - Select [Native Input Resolution] or [200%].
- 2 Press the jog dial (◀▶) while the OSD menu is closed.
 - Shifts to the left or right.

Export/Import

You can export/import LUT and CDL parameters as well as OSD menu settings.

LUT Import (📖 26)

- 1 Insert the USB memory stick containing the LUT file into the USB port of the video display.
- 2 Select [MENU] ➤ [Adjustment] ➤ [Detail Settings] ➤ [LUT Import].
- 3 Select the LUT file to import.
 - In the [Filename] field, search and display a file with extension ".clut" and ".cube" in the root folder.
- 4 Select the LUT type.
 - Refer to the "Concept Drawing of Display Image Processing and LUT" (📖 10).
- 5 Select the LUT No. to save the LUT.
- 6 Select [Execute].
 - When the confirmation screen appears, select [OK]. Import starts.

Note

- Import of [3D-LUT] can also be set from [Adjustment] ➤ [CDL/User LUT] ➤ [3D-LUT] ➤ [LUT Import].
- The LUT file (.clut format) is proprietary to Canon Video Display. Refer to the Canon website for the file format and how to create the LUT file.
- Up to 1000 LUT import files are recognized.
- You can delete the imported LUT, as well as rename the LUT (📖 26).

The configuration of LUT files (cube format) is shown below.

■ LUT filename


Type of characters that can be used	One-byte alphabetical characters and numbers only
No. of characters that can be used	Up to 64 characters (including the extension)
Extension	.cube

■ LUT file format

TITLE	ASCII 24 characters can be used. * Displayed in the OSD menu of the display as a selection item. (Up to 24 characters)
LUT_3D_SIZE	Specify one from 9/17/33/65.
Table Data	Specify Red, Green and Blue.
LUT_1D_SIZE DOMAIN_MIN DOMAIN_MAX LUT_1D_INPUT_RANGE LUT_3D_INPUT_RANGE	Unsupported.

- For the line feed code, use "CR (carriage return)", "LF (line feed)", or "CR+LF".
- For the character code, use "Shift-JIS", "EUC-JP", or "UTF-8 (with/without BOM)".
- Files in which both 1D-LUT and 3D-LUT are written are not supported.

■ Concept Drawing of Display Image Processing and LUT

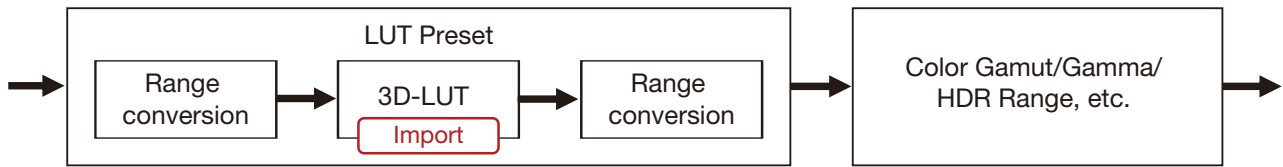

Export/Import OSD Menu Settings (📖64)

- 1 Select [MENU] ➡ [System Settings] ➡ [Export/Import].
- 2 Select [Export] or [Import].

Exporting

- ① Select [Target] from [USB] or [User 1] to [User 3].

Export [USB] to the USB memory and [User 1] to [User 3] to the built-in memory of the main unit.

- ② If you selected [USB], select [Filename].

- The factory default is [dinfo_dpvr****.dat] (****: Number of the product name). You can change the name of the file to be exported to the USB memory within 16 one-byte characters including alphabetical characters, numbers, and symbols.

Importing

- ① Select [Target] from [USB] or [User 1] to [User 3].

Specify the destination to save the file to be imported.

- ② Select [Filename] when [USB] is selected.

- ③ In [Settings], select [All] or Main Menu name.

- 3 Select [Execute].

- When the confirmation screen appears, select [OK]. Export/Import starts.

📘 Note

- After export to [User 1] to [User 3], you can select the configurations at startup from [User 1] to [User 3] in [Power on Setting] in [System Settings] (📖64).

Exporting/Importing CDL Parameters (📖 24)

- 1 Select [MENU] ➡ [Adjustment] ➡ [CDL/User LUT].
- 2 Select [CDL 1-8].
- 3 Select [Detail Settings] ➡ [CDL Export] or [CDL Import].

Exporting

- ① Select [CDL Preset].
- ② Select a file format ".ccc" or ".cdl".

Importing

- ① Select [Filename].
 - ② Select [CDL Preset].
- 4 Select [Execute].
 - When the confirmation screen appears, select [OK]. Export/Import starts.

Note

- The exported file is automatically saved under the name "YYYYMMDDhhmmss_Preset name.ccc (cdl)".
- Up to 1000 CDL import files are recognized.

Set Date/Time (📖 61)

This section describes how to set the video display Date/Time. The video display Date/Time will be reset if the power cord is not connected for approximately 20 days.

- 1 Select [MENU] ➡ [System Settings] ➡ [Date/Time].
 - A screen to input the Date/Time appears.
- 2 Set the Date/Time.
 - The selection frame moves and numbers change as you operate the jog dial. Repeat until you complete setting the year, month, date, hour, and minute.
- 3 Press the jog dial when you are finished.
 - The selection frame moves to [OK].
- 4 Check the content and press the jog dial to confirm the settings.


Reference

- When selecting [Cancel] or pressing MENU button before selecting [OK], the settings will be reset and the previous screen will be displayed.

Inputting Characters

This section describes how to input the characters.

- 1 When the character input screen is displayed, use the jog dial (◀▶) to select the area you wish to input.
- 2 Select characters using the jog dial (▲▼ or rotation).
 - The following characters can be selected: Press ▲▼ buttons to display them one by one.
 Alphanumeric characters: A to Z, a to z, 0 to 9
 Symbols: , . : ; ' ` - + / = % & ! ? # _ | \$ ^ ~ @ { } [] < > () space
 - Characters that cannot be entered are automatically skipped.
- 3 Repeat steps 1 and 2 until the desired text has been input.
- 4 Press the jog dial when you are finished.
 - The selection frame moves to [OK].
- 5 Check the content and press the jog dial to confirm the settings.

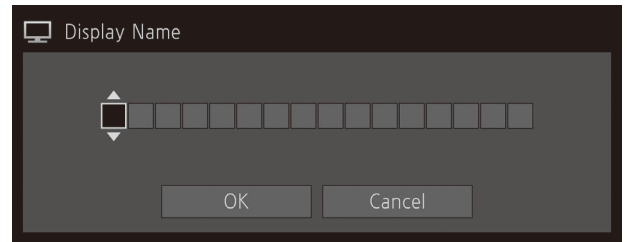

Reference

- When selecting [Cancel] or pressing MENU button before selecting [OK], the settings will be reset and the previous screen will be displayed.
- To erase a character in the selection frame, press the RESET button on the video display.

Using the Function (F) Buttons

You can assign functions to the F buttons on the video display to execute them instantly. You can assign different functions on F buttons in the normal and ALT modes respectively.

- 1 Select **[MENU]** ➤ **[System Settings]** ➤ **[Function/Channel Button]** ➤ **[Function Button]** or **[Function Button (ALT)]**.
 - The button selection screen will be displayed.
- 2 Select the button name and press the jog dial.
- 3 Select the function to assign.
 - Refer to the "Function to allow registration for the display F buttons (166)" for the available functions.
- 4 Press the jog dial.
 - The setting is confirmed.

The following content is assigned to function buttons on the video display by factory default.

F button	Normal mode	ALT mode
F1	Picture Mode	CDL/User LUT
F2	Brightness	CDL SOP/SAT
F3	TC/ALM	CDL/User LUT Bypass
F4	WFM/VEC	Single Input Dual View
F5	Frame Hold	False Color
F6	Pixel Value Check	Range Check
F7	Zoom Preset	2020 Outside of Gamut View
F8	Volume	Compare View



Reference

- Holding the F button down will display the function selection screen, and you can set the function you wish to register.
- You can check the function assigned to the F buttons of the main unit.
 Open the **[MENU]** ➤ **[System Settings]** ➤ **[OSD Settings]** ➤ **[Function Button Guide]** menu and select **[On]**. Pressing/moving the jog dial (**▲▼◀▶**, or Rotate) while OSD is not showing will display the list of functions. Selecting a function from the list and pressing/moving **▶** the jog dial will display the detailed settings screen, or execute that function.
 Pressing **◀** while the list of functions is displayed switches between normal mode and ALT mode.

Using the Channel (CH) Button

You can assign channels (various settings related to input signal) to the CH buttons on the video display and switch channels instantly.

14

- 1 Select **[MENU]** ➤ **[System Settings]** ➤ **[Function/Channel Button]** ➤ **[Channel Button]**.
 - The button selection screen will be displayed.
- 2 Select the button name and press the jog dial.
- 3 Select the channel to assign.
 - See [Channel Settings] (📖 34) for the configurable settings.
- 4 Press the jog dial.
 - The setting is confirmed.

The following content is assigned to channel buttons on the video display and to each channel by factory default.

CH	CH1	CH2	CH3	CH4	CH5
Input Configuration	12-3G/HD-SDI	HDMI	12-3G/HD-SDI	12-3G/HD-SDI	12-3G/HD-SDI
Select Input Signal	Automatic	Automatic	Automatic	Automatic	Automatic
Image Division	Automatic	Automatic	Automatic	Automatic	Automatic
Link Order	Automatic	Automatic	Automatic	Automatic	Automatic
Format	Automatic	Automatic	Automatic	Automatic	Automatic
Audio Input	Automatic	Automatic	Automatic	Automatic	Automatic
Channel Name	(Blank)	(Blank)	(Blank)	(Blank)	(Blank)
Picture Mode  Type	Normal	Normal	Normal	4K/2K	Normal
Picture Mode Picture Mode L Resolution 4K	ITU-R BT.709	ITU-R BT.709	User 2 (2020 HLG)	User 1 (2020 PQ)	User 1 (2020 PQ)
Picture Mode R Resolution 2K	ITU-R BT.709				
Payload	UHD/PQ	User 1 (2020 PQ)			
	UHD/HLG	User 2 (2020 HLG)			
	UHD	ITU-R BT.2020			
	709/PQ	—			
	709/HLG	—			
	709	ITU-R BT.709			
	VANC	—			
	Unknown	—			
Camera	CINEMA EOS SYSTEM	CINEMA EOS SYSTEM			
	ARRI	User 6			
	VARICAM	User 7			
Single Input Dual View	Off	Off	Automatic	Automatic	Off
Separator	Off	Off	Off	Off	White

CH	CH6	CH7	CH8	CH9	CH10 and up
Input Configuration	12-3G/HD-SDI	12-3G/HD-SDI	12-3G/HD-SDI	12-3G/HD-SDI	— (Not set)
Select Input Signal	Automatic	Automatic	Automatic	Automatic	Automatic
Image Division	Automatic	Automatic	Automatic	Automatic	Automatic
Link Order	Automatic	Automatic	Automatic	Automatic	Automatic
Format	Automatic	Automatic	Automatic	Automatic	Automatic
Audio Input	Automatic	Automatic	Automatic	Automatic	Automatic
Channel Name	(Blank)	(Blank)	(Blank)	(Blank)	(Blank)
Picture Mode  Type	Normal	4K/2K	Normal	Normal	Normal
Picture Mode Picture Mode L Resolution 4K	User 1 (2020 PQ)	User 2 (2020 HLG)	User 2 (2020 HLG)	User 2 (2020 HLG)	ITU-R BT.709
Picture Mode R Resolution 2K	ITU-R BT.709				
Payload	UHD/PQ	User 1 (2020 PQ)			
	UHD/HLG	User 2 (2020 HLG)			
	UHD	ITU-R BT.2020			
	709/PQ	—			
	709/HLG	—			
	709	ITU-R BT.709			
	VANC	—			
	Unknown	—			
Camera	CINEMA EOS SYSTEM	CINEMA EOS SYSTEM			
	ARRI	User 6			
	VARICAM	User 7			
Single Input Dual View	Automatic	Automatic	Off	Automatic	Off
Separator	Off	Off	White	Off	Off

Note

- Holding the CH button down displays the channel list, allowing the user to select the desired channel. When [Select Input Signal] is set to [Automatic], the input signal list is displayed and the signal can be changed temporarily*.

* When only the 12G-SDI/6G-SDI signal is input or when a video that can be simultaneously displayed with the 12G-SDI/6G-SDI signal is input.

Checking Signal Information and Status of the Main Unit

The video display is equipped with a banner display function.

1 Press the jog dial when the OSD menu is closed.

- The channel name, signal information, and status of the main unit will be displayed in the banner. It will automatically disappear after 6 seconds.


Note

- You can select how the banner is displayed ([Banner]  62).
- You can monitor the input signal status. ([Signal Monitoring]  51)
- For more detailed signal information, please refer to the section on [Signal Information] ( 68).
- The [Detecting sync.] banner will continue to appear until the input signal is synchronized.

Operating the video display using an external device [GPI terminal]

You can operate the video display using an external device connected to the GPI terminal and execute the functions registered in each pin. Remote operation is possible only when the video display is turned on.

Pin layout for GPI terminal



Pin No.	Signal	Factory default	
1	Pin1	CH1	
2	Pin2	CH2	
3	Pin3	CH3	
4	Pin4	Time Code	
5	Pin5	Tally Green	A tally appears at the top of the screen.
6	Pin6	Tally Red	
7	Pin7	Power On	
8	Pin8 (GND)	—	

1 Connect an external control device to the GPI terminal.

2 Select [System Settings] [GPI].

- The pin selection screen will be displayed.

3 Select a pin number and press the jog dial.

4 Select the function to assign.


- See [System Settings] ( 61) in the OSD menu for settable functions.

5 Press the jog dial.

- The setting is confirmed.

Operating the video display using an external device [LAN terminal]

The video display supports Television Systems Ltd.'s "TSL UMD Protocol Ver. 5.0". You can operate the video display using an external device connected to the LAN terminal and display characters and tally lights on the screen. There are two tally lights, on the left and right. Up to 16 characters can be displayed.

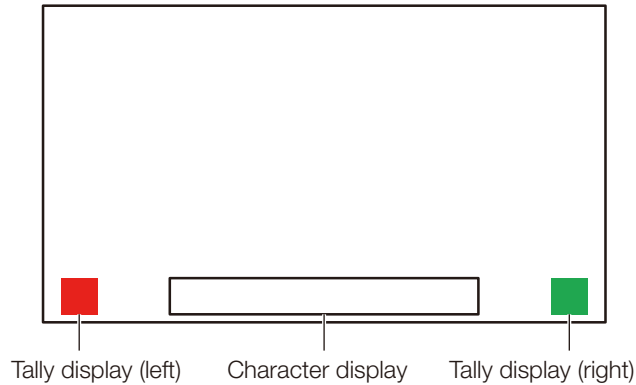

- 1 Connect an external control device to the LAN terminal.
- 2 Set [SCREEN] and [INDEX] to [0x0000] in the TSL Protocol settings.
- 3 Select [MENU] ➤ [Network/IMD Settings] ➤ [In Monitor Display].
- 4 Select [Control] ➤ [TSL Ver. 5.00].
 - This will allow operation from an external control device, and display characters and tally lights.
- 5 Select [Position] ➤ [Top] or [Bottom].
 - This sets the position where characters and tally lights will be displayed.

Note

- When [Multi View (Dual)] or [Multi View (Quad)] is displayed, set the [INDEX] setting to from [0x0001] to [0x0004].
- The port number for the controlling is fixed at "45000".
- With [In Monitor Display] you can also display user-selected characters on the screen. (📖 60)
- Unicode characters can be used in displayed text strings. However, some characters may not be displayed correctly.

Adjustment

This menu is used to adjust the image quality. The factory defaults differ according to the [Picture Mode] setting. (31)

Sub Menu	Setting Options (Bold: factory default)	
Picture Mode	ITU-R BT.709 ITU-R BT.2020 Adobe RGB DCI-P3 User 1 (2020 PQ) User 2 (2020 HLG) User 3 (DCI PQ) User 4 (DCI PQ D65) User 5 ~ User 9 CINEMA EOS SYSTEM ACESproxy (ver. 1.0.1)	Select a preset mode. [ITU-R BT.709], [ITU-R BT.2020], [Adobe RGB], [DCI-P3]: Mode set to the brightness, color temperature, gamma/EOTF, and color gamut of the three primary colors chromaticity points of each standard. [User 1–9] (User 1 (2020 PQ), User 2 (2020 HLG), User 3 (DCI PQ), User 4 (DCI PQ D65), User 5 ~ User 9): This mode allows you to set each item in [Adjustment] individually. You can change the mode name within 24 one-byte characters including alphabetical characters, numbers, and symbols (28). [CINEMA EOS SYSTEM]: Canon Log is the ideal mode for displaying images captured with Cinema EOS cameras. Using Camera Link, you can have the image quality setting change automatically ([Automatic Adjustment (CINEMA EOS)] 52). [ACESproxy (ver. 1.0.1)]: A mode to display ACESproxy videos in optimum gamma/EOTF and color gamut. • [ACESproxy (ver. 1.0.1)] cannot be set when [Channel Settings] ➤ [Picture Mode] ➤ [Type] are [4K/2K] or [Automatic].
Luminance	0 to 1000.0	Adjusts the peak brightness (Increments of 0.1). • The luminance values are just a guide and not guaranteed absolute values.
Brightness	-500 to 500 (0)	Adjusts the black level of the image. (Increments of 1)
Chroma	0 to 2000 (1000)	Adjusts the color saturation of the image (color depth). (Increments of 1) • [Chroma] is not settable in the following cases: - When [CDL/User LUT] is set to other than [OFF] - When [Color Gamut] is set to [Cinema Gamut to XXX] or [S-GamutXXX] - When [Gamma/EOTF] is set to [Canon Log], [Canon Log 2] or [Canon Log 3] - When [2020 Constant Luminance] is set to [Constant] - When the [Format] signal method is set to IctCp or XYZ - When [Picture Function Settings] ➤ [Compare View] ➤ [Enable] is set to [On]

Sub Menu	Setting Options (Bold: factory default)	
Backlight Control	Local Dimming Automatic / High / Low, Off	Switches the backlight control method. Local dimming technology controls the amount of light emitted by the backlight for each display area. The backlight of bright area is increased and the dark area is decreased according to the displayed content. • [Automatic]: This mode is suitable for checking HDR images. • [High]: This mode is suitable for checking images with a lot of bright areas. • [Low]: This mode is suitable for checking SDR images.
Color Temperature	D93, D65, D65 Custom, D61, D60, D56, D50, DCI-P3 Custom (xy), Off • When a preset is selected Gain R/G/B: 0 to 1023 Bias R/G/B: -500 to 500 (0) • When Custom (xy) is selected x: 0.260 to 0.360 y: 0.260 to 0.360	Sets the color temperature. (📖6) [D93], [D65], [D61], [D60], [D56], [D50], [DCI-P3]: Select from preset color temperatures. [D65 Custom]: This preset is for adjusting the color of the video display and displays having different display characteristics. The gain and bias are adjusted based on D65. [Gain R/G/B], [Bias R/G/B]: Adjusts the preset color temperature. (Increments of 1) [Custom (xy)]: Adjusts CIE x and y. (Increments of 0.001) • [Custom (xy)] and [Gain R/G/B] or [Bias R/G/B] cannot be selected at the same time. • When [Gain R/G/B] or [Bias R/G/B] value is adjusted, an asterisk [*] is displayed by color temperature preset mode. • The color coordinates (x, y) are just a guide and not guaranteed absolute values.
Color Gamut	ITU-R BT.709 ITU-R BT.2020 Adobe RGB DCI-P3 Native Cinema Gamut to 709 Cinema Gamut to 2020 Cinema Gamut to DCI S-Gamut3 to 709 S-Gamut3 to 2020 S-Gamut3 to DCI S-Gamut3.Cine to 709 S-Gamut3.Cine to 2020 S-Gamut3.Cine to DCI	Sets the color range. When [Picture Mode] ➤ [User 1–9] or [CINEMA EOS SYSTEM] [ITU-R BT.709], [ITU-R BT.2020], [Adobe RGB], [DCI-P3]: Color gamut compliant to each standard. [Native]: Color gamut that can be displayed by this video display. [Cinema Gamut to 709], [Cinema Gamut to 2020], [Cinema Gamut to DCI]: Modes where the color gamut is converted to monitor Cinema Gamut video recorded by the Cinema EOS cameras. [S-Gamut3 to 709], [S-Gamut3 to 2020], [S-Gamut3 to DCI], [S-Gamut3.Cine to 709], [S-Gamut3.Cine to 2020], [S-Gamut3.Cine to DCI]: Preset modes where the color gamut is converted. • [Color Gamut] cannot be set in the following cases. - When [CDL/User LUT] ➤ [ARRI (Rec2100-PQ-1K-100)], [ARRI (Rec2100-HLG-1K-200)], [VARICAM (V-Log to V-709)], [RED (Log3G10 to 709/1886)], [RED (Log3G10 to 2020/PQ)], [2020 PQ to 2020 SDR], [2020 PQ to 709 SDR], [2020 HLG to 709 HLG] or [2020 HLG to 709 SDR] is selected. • For checking the video captured with Cinema EOS cameras, please refer to the "Parameter of Cinema EOS cameras and Canon displays (📖54)".

Sub Menu	Setting Options (Bold: factory default)
Gamma/EOTF	1.0, 2.2, 2.35, 2.4, 2.6, ITU-R BT.1886 SMPTE ST 2084 (PQ) Hybrid Log-Gamma Canon Log Canon Log (HDR) Canon Log 2 Canon Log 2 (HDR) Canon Log 3 Canon Log 3 (HDR) S-Log2 (HDR) S-Log3 (HDR) Sets the Gamma/EOTF. [1.0], [2.2], [2.35], [2.4], [2.6], [ITU-R BT.1886], [Canon Log], [Canon Log 2], [Canon Log 3]: Select the preset gamma. [SMPTE ST 2084 (PQ)], [Hybrid Log-Gamma], [Canon Log (HDR)], [Canon Log 2 (HDR)], [Canon Log 3 (HDR)], [S-Log2 (HDR)], [S-Log3 (HDR)]: Select the gamma/EOTF for HDR display. ❖ About [Hybrid Log-Gamma] This method processes the system gamma for the Y signal (Compliant with ITU-R BT.2100). Then the system gamma value will be displayed in the Setting Options on the menu screen. - Not settable in the following cases: - When [ACESproxy (ver. 1.0.1)] is selected in [Picture Mode] - When [CDL/User LUT] ➤ [ARRI (Rec2100-PQ-1K-100)], [ARRI (Rec2100-HLG-1K-200)], [VARICAM (V-Log to V-709)], [RED (Log3G10 to 709/1886)], [RED (Log3G10 to 2020/PQ)], [2020 PQ to 2020 SDR], [2020 PQ to 709 SDR], [2020 HLG to 709 SDR] is selected. - For checking the captured video with Cinema EOS cameras and ARRI / Panasonic cinema cameras, please refer to [Camera Link] ➤ [Automatic Adjustment] (📖 52). - Relationship between [Color Gamut] and [Gamma/EOTF] that can be selected (📖 29).

Sub Menu	Setting Options (Bold: factory default)	
HDR Range	Sets the display method when Gamma/EOTF for HDR display is selected.	
SMPTE ST 2084 (PQ)	100 to 10000 (1000)	Sets the [SMPTE ST 2084 (PQ)] dynamic range to be displayed, from 0.005 to 10,000 cd/m ² (nits). (100 to 4000: 100 increments. 4000 to 10000: 1000 increments)
Hybrid Log-Gamma	100 to 1000	Sets how far to display the [Hybrid Log-Gamma] dynamic range. (in increments of 100) The upper limit value will change to match the settings of [HLG System Gamma]. (27)
Canon Log (HDR)	100 to 800	Sets the [Canon Log] dynamic range to be displayed, from 0 to 800%. (in 100 increments)
Canon Log 2 (HDR)	100 to 1600	Sets the [Canon Log 2] dynamic range to be displayed, from 0 to 1600%. (in 100 increments)
Canon Log 3 (HDR)	100 to 1600	Sets the [Canon Log 3] dynamic range to be displayed, from 0 to 1600%. (in 100 increments)
S-Log2 (HDR)	100 to 1400 (1000)	Sets how far to display the [S-Log] dynamic range. (in 100 increments)
S-Log3 (HDR)	100 to 3900 (1000)	

Setting procedures


The explanation uses [SMPTE ST 2084 (PQ)] as an example.

When set at [1000], those areas that exceed 1,000 cd/m² are clipped, and those that are 1,000 cd/m² or below are assigned to the dynamic range of the video display. When displaying an image with a PQ of 1,000 cd/m², you can check the entire dynamic range of the image. Also, when displaying an image with a PQ of 4,000 cd/m², you can check the image up to 1,000 cd/m².

When set at [4000], those areas that exceed 4,000 cd/m² are clipped, and those that are 4,000 cd/m² or below are assigned to the dynamic range of the video display. When displaying an image with a PQ of 4,000 cd/m², although the apparent brightness lowers, you can still check all the dynamic range of the image.

The brightness of the video display corresponds to the value set for Luminance.

SMPTE ST 2084 (PQ) 4,000 cd/m² signal
(Luminance: [1000.0])

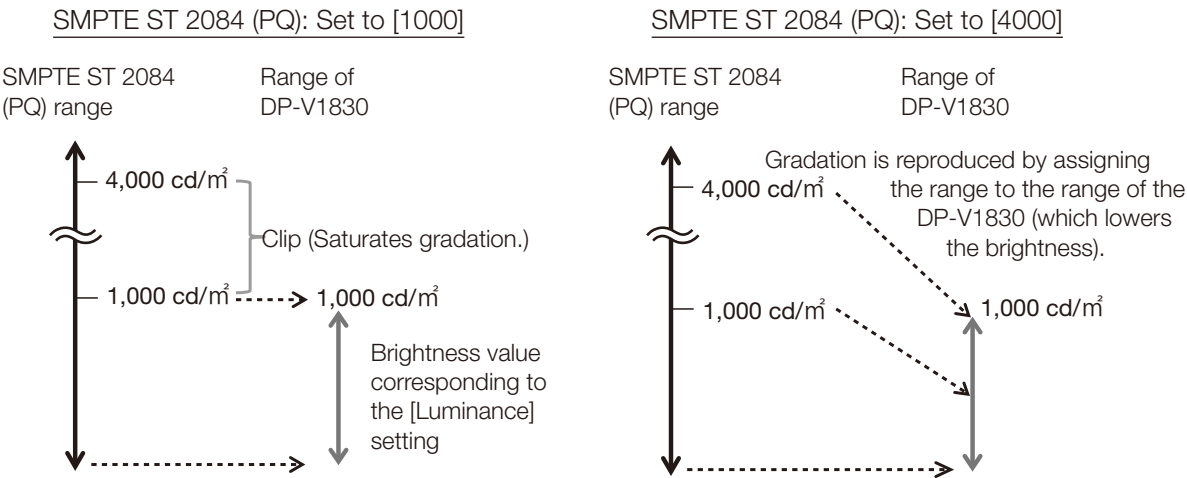

Sub Menu	Setting Options (Bold: factory default)	
Color Range	Automatic Full SDI Full (4-1019) Limited	Sets the quantization range. [Automatic]: Sets the range based on signal information automatically. - Setting is disabled when [ACESproxy (ver. 1.0.1)] is selected for [Picture Mode]. - Operations when [Automatic] is selected are described below. - It is set in accordance with the settings if Color Range settings are included in the camera metadata. When there is [Full Range] metadata in Payload when SDI is selected, it will be set to [SDI Full]. - When HDMI is selected, [Full] or [Limited] is set automatically depending on HDMI signal information. - When SDI is selected, the setting is configured according to the settings for [Picture Mode], [Color Gamut], and [Gamma/EOTF] (30). - Operations when [Format] is set to [ICtCp] are described below. - When [Color Range] is set to other than [Full], [Wave Form Monitor] will display only a signal set with [Color Range].
Output Transform	ITU-R BT.709 ITU-R BT.2020 DCI-P3	When [Picture Mode] ➤ [ACESproxy (ver. 1.0.1)] [ITU-R BT.709], [ITU-R BT.2020], [DCI-P3]: ACESproxy is converted into respective mode.
Output Transform Surround	Dim Surround Dark Surround	When [Picture Mode] ➤ [ACESproxy (ver. 1.0.1)] [Dim Surround]: Enables Dim Surround process specified by ACESproxy. [Dark Surround]: Enables Dark Surround process specified by ACESproxy.

Sub Menu	Setting Options (Bold: factory default)	
CDL/User LUT	Configures settings for CDL or User LUT.	
CDL/User LUT	CDL 1 to CDL 8 User LUT 1 to User LUT 8 Off Only when [Picture Mode] is [User 1-9] ARRI (Rec2100-PQ-1K-100) ARRI (Rec2100-HLG-1K-200) VARICAM (V-Log to V-709) RED (Log3G10 to 709/1886) RED (Log3G10 to 2020/PQ) 2020 PQ to 2020 SDR 2020 PQ to 709 SDR 2020 HLG to 709 HLG 2020 HLG to 709 SDR	Select a preset such as CDL or external LUT. - When [ARRI (Rec2100-PQ-1K-100)] or [RED (Log3G10 to 2020/PQ)] is selected, [HDR Range] ➤ [SMPTE ST 2084 (PQ)] setting is less than 1000, the setting becomes [1000]. - When [ARRI (Rec2100-HLG-1K-200)] is selected, [HDR Range] ➤ [Hybrid Log-Gamma] settings become [1000]. [Color Gamut] and [Gamma/EOTF] are set in accordance with the [User LUT] settings (30). - Not settable in the following cases: - When [Color Gamut] is set to [Cinema Gamut to XXX] or [S-GamutXXX] - When [Gamma/EOTF] is set to [Canon Log], [Canon Log 2] or [Canon Log 3] - When [2020 Constant Luminance] is set to [Constant] - When the [Format] signal method is set to ICtCp or XYZ
● When [CDL 1-8] is selected		
Power	0.50 to 4.00 (1.00)	Adjusts the Gamma of the image. (0.01 increments)
Saturation	0.000 to 2.000 (1.000)	Adjusts the color saturation of the image. (0.001 increments)
Offset	-1.000 to 1.000 (0.000)	Adjusts the black level of the image. (0.001 increments)
Slope	0.000 to 2.000 (1.000)	Adjusts the white level of the image. (0.001 increments)
Bypass	On, Off	When set to [On], you can temporarily disable the CDL adjustment result and return to previously set image quality. - Parameters are stored until the video display is turned off. - Bypass is set to [Off] in the following cases: [Picture Mode] has been changed - When the [CDL/User LUT] setting has been changed [Picture Function Settings] ➤ [Compare View] ➤ [Enable] settings have been changed - When [Picture Function Settings] ➤ [Compare View] ➤ [Enable] ➤ [On], this item is fixed to [Off].

Sub Menu	Setting Options (Bold: factory default)	
Detail Settings		
CDL Export		Exports CDL parameters.
CDL Preset	CDL 1 to CDL 8 All	
File Type	CCC, CDL	
Execute		
CDL Import		Imports CDL parameters.
Filename		
CDL Preset	CDL 1 to CDL 8	
Execute		
CDL Preset Name		You can change the name of [CDL 1-8] within 16 characters including alphabetical characters, numbers, and symbols.
Anchor CDL		You can temporarily save parameters for [Power], [Saturation], [Offset], and [Slope] and recover the values. (anchor point setting)
Reset CDL		Resets CDL parameters.
● When [User LUT 1-8] is selected Select a preset of the 3D-LUT.		
3D-LUT	Selects the User LUT (3D-LUT) to apply and imports an external LUT (3D-LUT).	
3D-LUT	3D-LUT 1 to 3D-LUT 8 Off	Select the 3D-LUT (preset) saved in one of [User LUT 1-8].
LUT Import		Same as [Detail Settings] ➡ [LUT Import], [LUT Name], [LUT Delete] (📖26)
LUT Name		
LUT Delete		
		• Cannot be set when [3D-LUT] ➡ [Off].
Color Range	Automatic , Manual	Sets the method of color range conversion performed before and after User LUT processing (input/output). [Automatic]: The color range is automatically converted before and after User LUT processing (input/output). - When [Color Range] ➡ [Limited] (📖23): [Input] is set to [Limited to Full]. [Output] is set to [Full to Limited]. - When [Color Range] ➡ [Full] (📖23)*: [Input] and [Output] are set to [Off]. * [SDI Full (4-1019)] is included. [Manual]: Sets [Input] or [Output].

Sub Menu	Setting Options (Bold: factory default)	
Input	Limited to Full, Off	When [Color Range]  [Manual] Sets the method of range conversion performed before User LUT processing. [Limited to Full]: Performs the process for converting to [Full]. [Off]: The color range is not converted.
Output	Full to Limited, Off	When [Color Range]  [Manual] Sets the method of range conversion performed after User LUT processing. [Full to Limited]: Performs the process for converting to [Limited]. [Off]: The color range is not converted.
Image signal information display	Apply , Do not apply	Select whether or not to apply the LUT when the wave form monitor, vector scope or other image signal information is displayed.
Bypass	On, Off	When set to [On], you can return to the image quality before User LUT was applied. • When [Picture Function Settings]  [Compare View]  [Enable]  [On], this item is fixed to [Off]. • Parameters are stored until the video display is turned off. • Bypass is set to [Off] in the following cases: - [Picture Mode] has been changed - When the [CDL/User LUT] setting has been changed - [Picture Function Settings]  [Compare View]  [Enable] settings have been changed
User LUT Preset Name		You can change the name of [User LUT 1-8] within 24 characters including one-byte alphabetical characters, numbers, and symbols.
Detail Settings 	Sets details for Picture Mode.	
LUT Import	You can import LUT. File names that can be imported can be up to 64 one-byte characters, including alphabetical characters, numbers, and symbols (including file extensions). ( 9)	
Filename		Select a filename.
LUT Type	3D-LUT	Select the LUT type.
Select LUT	3D-LUT 1-8	Select the save destination for the LUT to be imported.
Execute		Performs import.
LUT Name	You can specify the name of LUT within one-byte 24 characters including alphabetical characters, numbers, and symbols.	
LUT Type		Same as [LUT Import]
Select LUT		
Input Name		Input the LUT name.
LUT Delete	Deletes imported LUT.	
LUT Type		Same as [LUT Import]
Select LUT		
Delete		Deletes LUT.

Sub Menu	Setting Options (Bold: factory default)	
YCbCr Color Matrix	Automatic ITU-R BT.709 ITU-R BT.2020	Sets the matrix conversion method for input signals in YCbCr format. [Automatic]: Matrix coefficient is set in conformance with the ITU-R BT.2020 standard when the [Picture Mode] or [Color Gamut] setting is [ITU-R BT.2020] and in conformance with the ITU-R BT.709 standard otherwise. [ITU-R BT.709]: Matrix coefficient is set in conformance with the ITU-R BT.709 standard. [ITU-R BT.2020]: Matrix coefficient is set in conformance with the ITU-R BT.2020 standard. • Setting is disabled when [ACESproxy (ver. 1.0.1)] is selected for [Picture Mode].
2020 Constant Luminance	Constant Luminance Non-constant Luminance	When [Picture Mode] or [Color Gamut] ➤ [ITU-R BT.2020] Sets the color matrix conversion method. [Constant Luminance]: YUV signals are linearly converted and then converted into RGB signals. [Non-constant Luminance]: YUV signals are converted into RGB signals without changing gamma 0.45. • Not settable in the following cases: - When [Gamma/EOTF] is set to [Canon Log], [Canon Log 2] or [Canon Log 3] - When the [Format] signal method is set to ICtCp or XYZ
2020 Gamut Mapping	Gamut Mapping Clipping	When [Picture Mode] or [Color Gamut] ➤ [ITU-R BT.2020] [Gamut Mapping]: Mapping is performed on colors outside the native color gamut by Canon's unique method. [Clipping]: Colors outside the native color gamut are clipped by a general method.
HLG System Gamma	Automatic Manual • When Manual is selected [Gamma/EOTF] ➤ When [Hybrid Log-Gamma] 1.000 to 1.500 (1.200)	When [Gamma/EOTF] ➤ [Hybrid Log-Gamma] Sets the system gamma or peak luminance. [Automatic]: When [Hybrid Log-Gamma] is selected, it adjusts the system gamma automatically to match the luminance and HDR range. [Manual]: When [Hybrid Log-Gamma] is selected, adjusts the system gamma. (Increments of 0.005) The maximum value for each setting becomes the upper limit value of [HDR Range].

Sub Menu	Setting Options (Bold: factory default)	
HDMI Link	When [Picture Mode] ► [User 1–9] Video is displayed at the image quality linked to the video image quality setting using the HDMI metadata. • Parameter of HDMI metadata and Video Display (📖 30)	
Automatic Adjustment	On, Off	Turns the HDMI link on/off.
Color Gamut/Gamma/EOTF	On , Off	Matches the [Color Gamut] and [Gamma/EOTF] settings of the video display with the HDMI metadata.
Luminance/HDR Range	On , Off	Matches the [Luminance] and [HDR Range] setting of the video display with the HDMI metadata.
Copy Picture Mode	When [Picture Mode] ► [User 1–9] Copy the Picture Mode settings. • In other [Picture Mode], the results of calibration performed at the factory are copied.	
Picture Mode (Copy from)	ITU-R BT.709 ITU-R BT.2020 Adobe RGB DCI-P3 User 1 (2020 PQ) User 2 (2020 HLG) User 3 (DCI PQ) User 4 (DCI PQ D65) User 5 ~ User 9	Select "Picture Mode (Copy from)". [User 1–9]: Select from other than the currently set mode.
Execute		Performs copy.
Picture Mode Name		You can change the name of [User 1–9] within 24 characters including alphabetical characters, numbers, and symbols.
Anchor Adjustment	OK Cancel	Temporarily saves parameters for adjusting [Luminance], [Brightness], [Chroma], and [HDR Range] and recover the values (anchor point setting). [OK]: Performs anchor point setting. [Cancel]: Returns to the previous screen without setting anchor point.
Reset	OK Cancel	Return [Picture Mode] to factory default. Note that in [User 1–9] mode where you are performing calibration, the setting returns to the value after calibration instead of the factory default. When selected, the message [Reset Adjustment settings to defaults?] appears. [OK]: Performs reset. [Cancel]: Returns to the previous screen without resetting.

■ Relationship between [Color Gamut] and [Gamma/EOTF] that can be selected

When [Color Gamut] is changed, [Gamma/EOTF] is changed to the underlined value (default value) when the current [Gamma/EOTF] settings are not selectable.

Picture Mode	Color Gamut	Selectable Gamma/EOTF
ITU-R BT.709, ITU-R BT.2020	Cannot be selected	1.0, <u>2.2</u> , 2.35, 2.4, 2.6, ITU-R BT.1886, SMPTE ST 2084 (PQ), Hybrid Log-Gamma, Canon Log, Canon Log (HDR), Canon Log 2, Canon Log 2 (HDR), Canon Log 3, Canon Log 3 (HDR), S-Log2 (HDR), S-Log3 (HDR)
Adobe RGB		1.0, <u>2.2</u> , 2.35, 2.4, 2.6, ITU-R BT.1886
DCI-P3		1.0, 2.2, 2.35, 2.4, <u>2.6</u> , ITU-R BT.1886, SMPTE ST 2084 (PQ), Canon Log, Canon Log (HDR), Canon Log 2, Canon Log 2 (HDR), Canon Log 3, Canon Log 3 (HDR), S-Log2 (HDR), S-Log3 (HDR)
CINEMA EOS SYSTEM, User 1-9	ITU-R BT.709, ITU-R BT.2020	1.0, <u>2.2</u> , 2.35, 2.4, 2.6, ITU-R BT.1886, SMPTE ST 2084 (PQ), Hybrid Log-Gamma, Canon Log, Canon Log (HDR), Canon Log 2, Canon Log 2 (HDR), Canon Log 3, Canon Log 3 (HDR), S-Log2 (HDR), S-Log3 (HDR)
	Adobe RGB	1.0, <u>2.2</u> , 2.35, 2.4, 2.6, ITU-R BT.1886
	DCI-P3	1.0, 2.2, 2.35, 2.4, <u>2.6</u> , ITU-R BT.1886, SMPTE ST 2084 (PQ), Canon Log, Canon Log (HDR), Canon Log 2, Canon Log 2 (HDR), Canon Log 3, Canon Log 3 (HDR), S-Log2 (HDR), S-Log3 (HDR)
	Native	1.0, <u>2.2</u> , 2.35, 2.4, 2.6, ITU-R BT.1886, SMPTE ST 2084 (PQ)
	Cinema Gamut to 709, Cinema Gamut to 2020	2.2, Canon Log, Canon Log (HDR), Canon Log 2, <u>Canon Log 2 (HDR)</u> , Canon Log 3, Canon Log 3 (HDR)
	Cinema Gamut to DCI	Canon Log, Canon Log (HDR), Canon Log 2, <u>Canon Log 2 (HDR)</u> , Canon Log 3, Canon Log 3 (HDR)
	S-Gamut3 to 709 S-Gamut3 to 2020 S-Gamut3.Cine to 709 S-Gamut3.Cine to 2020	1.0, <u>2.2</u> , 2.35, 2.4, 2.6, ITU-R BT.1886, SMPTE ST 2084 (PQ), Hybrid Log-Gamma, S-Log2 (HDR), S-Log3 (HDR)
	S-Gamut3 to DCI S-Gamut3.Cine to DCI	1.0, 2.2, 2.35, 2.4, <u>2.6</u> , ITU-R BT.1886, SMPTE ST 2084 (PQ), S-Log2 (HDR), S-Log3 (HDR)

■ Operations when [Color Range] ➤ [Automatic] (when SDI is selected)

	Setting Options	Color Range to be Set
Picture Mode	DCI-P3	Full
Color Gamut	DCI-P3 Cinema Gamut to DCI	
Gamma/EOTF	Canon Log (HDR) Canon Log 2 (HDR) Canon Log 3 (HDR) S-Log2 (HDR) S-Log3 (HDR)	
Other than the above		Limited

■ Parameter of [User LUT] and [Color Gamut] / [Gamma/EOTF]

User LUT	Color Gamut	Gamma/EOTF
ARRI (Rec2100-PQ-1K-100)	ITU-R BT.2020	SMPTE ST 2084 (PQ)
ARRI (Rec2100-HLG-1K-200)	ITU-R BT.2020	Hybrid Log-Gamma
VARICAM (V-Log to V-709)	ITU-R BT.709	2.2
RED (Log3G10 to 709/1886)	ITU-R BT.709	ITU-R BT.1886
RED (Log3G10 to 2020/PQ)	ITU-R BT.2020	SMPTE ST 2084 (PQ)
2020 PQ to 2020 SDR	ITU-R BT.2020	2.4
2020 PQ to 709 SDR	ITU-R BT.709	
2020 HLG to 709 HLG	ITU-R BT.709	– (User selectable)
2020 HLG to 709 SDR	ITU-R BT.709	2.4

■ Parameter of HDMI metadata and Video Display

HDMI metadata	Video display setting
Color Gamut	BT.709
	BT.2020
Gamma/EOTF	Traditional SDR
	PQ
	Hybrid Log-Gamma

■ Details of the factory default settings for each [Picture Mode]

Item		ITU-R BT.709	ITU-R BT.2020	Adobe RGB	DCI-P3
Luminance		100.0	100.0	100.0	48.0
Brightness		0	0	0	0
Chroma		1000	1000	1000	1000
Backlight Control		Local Dimming Low	Local Dimming Low	Local Dimming Low	Local Dimming Low
Color Temperature	Preset	D65	D65	D65	DCI-P3
	x	0.313	0.313	0.313	0.314
	y	0.329	0.329	0.329	0.351
	Gain R/G/B	1023/1023/1023 (When [D65 Custom]: 1000/1023/1023)			
	Bias R/G/B	0	0	0	0
Color Gamut		ITU-R BT.709	ITU-R BT.2020	Adobe RGB	DCI-P3
Gamma/EOTF		2.2	2.2	2.2	2.6
Color Range		Automatic	Automatic	Automatic	Automatic
Output Transform		–	–	–	–
Output Transform Surround		–	–	–	–
CDL/User LUT		Off	Off	Off	Off
YCbCr Color Matrix		Automatic	Automatic	Automatic	Automatic
2020 Constant Luminance		Non-constant Luminance	Non-constant Luminance	Non-constant Luminance	Non-constant Luminance
2020 Gamut Mapping		Clipping	Clipping	Clipping	Clipping
HLG System Gamma		Automatic	Automatic	Automatic	Automatic
HDMI Link		Off	Off	Off	Off
Picture Mode Name		–	–	–	–

Item		User 1	User 2	User 3	User 4	User 5 to User 9
Luminance		1000.0	1000.0	1000.0	1000.0	100.0
Brightness		0	0	0	0	0
Chroma		1000	1000	1000	1000	1000
Backlight Control		Local Dimming Automatic	Local Dimming Automatic	Local Dimming Automatic	Local Dimming Automatic	Local Dimming Low
Color Temperature	Preset	D65	D65	DCI-P3	D65	D65
	x	0.313	0.313	0.314	0.313	0.313
	y	0.329	0.329	0.351	0.329	0.329
	Gain R/G/B	1023/1023/1023 (When [D65 Custom]: 1000/1023/1023)				
	Bias R/G/B	0	0	0	0	0
Color Gamut		ITU-R BT.2020	ITU-R BT.2020	DCI-P3	DCI-P3	ITU-R BT.709
Gamma/EOTF		SMPTE ST 2084 (PQ)	Hybrid Log-Gamma	SMPTE ST 2084 (PQ)	SMPTE ST 2084 (PQ)	2.2
Color Range		Automatic	Automatic	Automatic	Automatic	Automatic
Output Transform		–	–	–	–	–
Output Transform Surround		–	–	–	–	–
CDL/User LUT		Off	Off	Off	Off	Off
YCbCr Color Matrix		Automatic	Automatic	Automatic	Automatic	Automatic
2020 Constant Luminance		Non-constant Luminance	Non-constant Luminance	Non-constant Luminance	Non-constant Luminance	Non-constant Luminance
2020 Gamut Mapping		Clipping	Clipping	Clipping	Clipping	Clipping
HLG System Gamma		Automatic	Automatic	Automatic	Automatic	Automatic
HDMI Link		Off	Off	Off	Off	Off
Picture Mode Name		User 1 (2020 PQ)	User 2 (2020 HLG)	User 3 (DCI PQ)	User 4 (DCI PQ D65)	User 5 to User 9

Item		CINEMA EOS SYSTEM	ACESproxy (ver. 1.0.1)
Luminance		1000.0	48.0
Brightness		0	0
Chroma		1000	1000
Backlight Control		Local Dimming Automatic	Local Dimming Low
Color Temperature	Preset	D65	D60
	x	0.313	0.322
	y	0.329	0.338
	Gain R/G/B	1023/1023/1023 (When [D65 Custom]: 1000/1023/1023)	
	Bias R/G/B	0	0
Color Gamut		ITU-R BT.2020	–
Gamma/EOTF		Canon Log 2 (HDR)	–
Color Range		Automatic	–
Output Transform		–	DCI-P3
Output Transform Surround		–	Dark Surround
CDL/User LUT		Off	Off
YCbCr Color Matrix		Automatic	Automatic
2020 Constant Luminance		Non-constant Luminance	Non-constant Luminance
2020 Gamut Mapping		Clipping	Clipping
HLG System Gamma		Automatic	Automatic
HDMI Link		Off	Off
Picture Mode Name		–	–

Channel Settings

This menu is used for input related settings. Select the [Select Channel] and choose a channel number from CH1 to CH20. Finally define the parameter of each of the [Channel Settings].

❖ "Supported Signal Format" (📖 69)





Sub Menu	Setting Options	
Select Channel	CH1 to CH20	Display the channel number. In addition, you can assign each content of [Channel Settings] to each channel (📖 14). It may take 3 seconds when switching channels.
Input Configuration	12-3G/HD-SDI HDMI — (Not set)	Select the input. Factory default depend on the channel (📖 15).
Select Input Signal	Automatic Quad Input Dual Input A,B Dual Input C,D Single Input A Single Input B Single Input C Single Input D	Sets the signal display method. [Automatic]: The display method is automatically determined to match the input signal. [Quad Input]: Four input signals (Input A to Input D terminals) are displayed. [Dual Input A,B]: Two input signals (Input A terminal and Input B terminal) are displayed. [Dual Input C,D]: Two input signals (Input C terminal and Input D terminal) are displayed. [Single Input A], [Single Input B], [Single Input C], [Single Input D]: One input signal (any of Input A to Input D) is displayed. - Settings that can be set differ according to the input signal. [HDMI]: This is fixed to [Automatic].
Image Division	When [Input Configuration] ➡ [12-3G/HD-SDI]	Sets the display method when using either [Quad Input] or [Dual Input]. Two division methods "Square Division" and "2 Sample Interleave" are supported for 4K video signals.
	Automatic [Select Input Signal] ➡ When [Quad Input] Square Division 2 Sample Interleave [Select Input Signal] ➡ When [Quad Input] Multi View (Quad) [Select Input Signal] ➡ When [Dual Input] Multi View (Dual)	[Automatic]: Automatically determined based on payload and displayed. [Square Division]: Displays a signal transmitted over four inputs as a single image. [2 Sample Interleave]: Displays a signal transmitted divided into a 2K/HD signal as a single image. [Multi View (Quad)]: Each of the images from the four inputs are shown in four screens. [Multi View (Dual)]: Each of the images (Inputs A/B or Inputs C/D) from the two inputs are shown in two screens. The diagram illustrates the 'Square Division' feature. On the left, four separate rectangular images are shown, each representing one of the four input channels (A, B, C, D). An arrow points to the right, where a single, larger rectangular image is shown. This larger image is a composite of the four input images, with each input occupying a quadrant of the total frame. The composite image shows a building and a bridge, with each quadrant containing a slightly different view or crop of the same scene. Select Input Signal: Quad Input, Image Division: Square Division - When using [Multi View (Quad)], the left and right parts of 2048x1080 images will be trimmed to display an area of 1920x1080. - For 2048x1080 images when using [Multi View (Dual)], the images are displayed in reduced size when [Screen Scaling] is set to [Automatic]. The left and right parts of images will be trimmed for display when anything other than [Automatic] is selected.

Sub Menu	Setting Options	
Link Order	Automatic Off	Automatically detects and displays correct terminal order based on payload when using [2 Sample Interleave].
Format	SDI Signal Automatic 4:2:2 YCbCr 10-bit 4:2:2 YCbCr 12-bit 4:4:4 YCbCr 10-bit 4:4:4 YCbCr 12-bit 4:2:2 ICtCp 10-bit 4:2:2 ICtCp 12-bit 4:4:4 ICtCp 10-bit 4:4:4 ICtCp 12-bit 4:4:4 RGB 10-bit 4:4:4 RGB 12-bit 4:4:4 XYZ 10-bit 4:4:4 XYZ 12-bit HDMI Signal Automatic	Sets the color format and gradation. [Automatic]: Sets automatically to match the input signal. - The HD-SDI signal is either [4:2:2 YCbCr 10-bit] or [4:2:2 ICtCp 10-bit]. - If [Automatic] is selected, they are rendered in a Payload that is selected in the order A → B → C → D. - The settings for correctly displaying ICtCp format signals are as follows. [Picture Mode]: [ITU-R BT.709] or [ITU-R BT.2020] [Color Gamut]: [ITU-R BT.709] or [ITU-R BT.2020] [Gamma/EOTF]: [SMPTE ST 2084 (PQ)] or [Hybrid Log-Gamma] - If you need to use the ICtCp format for SDI signals, select any of the following to match the signal: [4:2:2 ICtCp 10-bit], [4:2:2 ICtCp 12-bit], [4:4:4 ICtCp 10-bit], [4:4:4 ICtCp 12-bit] - To use 4:4:4 XYZ 10-bit for SDI signals, select [4:4:4 XYZ 10-bit]. Then, signals will be processed as signals where XYZ data is included in RGB data output in 4:4:4 RGB 10-bit format. - With SDI signals, when [Color Gamut] is set to [Cinema Gamut to XXX] or [S-GamutXXX], or when [Gamma/EOTF] is set to [Canon Log], [Canon Log 2] or [Canon Log 3], operation changes as follows according to the color format. - ICtCp/RGB: Operates as YCbCr - XYZ: Operates as RGB
Audio Input	[Select Input Signal]  When [Quad Input] Automatic, Input A, Input B, Input C, Input D When [Dual Input A,B] Automatic, Input A, Input B When [Dual Input C,D] Automatic, Input C, Input D	Sets the audio terminal. [Automatic]: Sets automatically to match the input signal. For [Select Input Signal]  [Automatic] or [Single Input], it is fixed at [Automatic].
Channel Name		Sets the name of the selected channel. You can input up to 16 alphanumeric characters.

Sub Menu	Setting Options	
Picture Mode	Set [Picture Mode] by individual channel.	
Type	Normal 4K/2K Automatic	[Normal]: Sets one [Picture Mode]. [4K/2K]: Sets [Picture Mode] by individual 4K or 2K signal screen. [Automatic]: [Picture Mode] is set according to the SDI signal. The set [Picture Mode] is changed to in the order camera metadata → Payload → resolution (4K/2K).
[Type]  When [Normal] Picture Mode When [4K/2K] Resolution 4K, 2K When [Automatic] Resolution 4K, 2K Payload UHD/PQ, UHD/HLG, UHD, 709/PQ, 709/HLG, 709, VANC, Unknown Camera CINEMA EOS SYSTEM, ARRI, VARICAM	ITU-R BT.709 ITU-R BT.2020 Adobe RGB DCI-P3 User 1 (2020 PQ) User 2 (2020 HLG) User 3 (DCI PQ) User 4 (DCI PQ D65) User 5 ~ User 9 CINEMA EOS SYSTEM ACESproxy (ver. 1.0.1) — (Not set)	Set the [Picture Mode] for each screen. [ACESproxy (ver. 1.0.1)]: Can be set when [Type] is [Normal]. [—] (Not set): Cannot automatically change image quality to suit input signal. Can be set when other than [Resolution 4K] and [Resolution 2K] are selected in [Type]  [Automatic]. - Colorimetry Bit/Transfer Characteristics of the SDI Payload ID supports the signal in conformity with the following standard. - SMPTE ST 2082-10:2018 (12G-SDI) - SMPTE ST 2081-10:2018 (6G-SDI) - SMPTE ST 425-1:2017 (3G-SDI Single Link / Square Division) - SMPTE ST 425-3:2019 (3G-SDI Dual Link(2SI)) - SMPTE ST 425-5:2019 (3G-SDI Quad Link(2SI)) - SMPTE ST 292-1:2018 (HD-SDI) - Settings that can be set differ according to the input signal. [Input Configuration]  [HDMI]: [4K/2K] and [Automatic] cannot be set in [Type].
Single Input Dual View	Automatic, Off	When other than [Image Division]  [Multi View (Quad)] or [Multi View (Dual)] The image from the input signal can be reduced and shown in dual-screen. [Automatic]: When the [Picture Function Settings] Sub Menu items are set to [On], identical images are automatically shown and dual-screen comparison can be made. 4K images are shown in reduced size. Relevant [Picture Function Settings] Sub Menu items: [Peaking], [False Color], [Range Check], [2020 Outside of Gamut View], [Monochrome], [Blue Only], [Red Off], [Green Off], [Blue Off], and [Compare View] Cannot be used when an unsupported video signal is input.
Separator	White Half Black Off	In the following cases, screen borders will be displayed. - When [Multi View (Quad)] or [Multi View (Dual)] is selected - When [Single Input Dual View] is set to [Automatic] and the images are shown next to each other for image comparison - When [Picture Function Settings]  [Compare View]  [Enable] is [On]

Display Settings

This menu is used to configure the display method.

Sub Menu	Setting Options (Bold: factory default)	
Screen Scaling	Native Input Resolution 200% Automatic	Defines how the video is scaled and displayed on the screen. [Native Input Resolution]: Displays the input signal without scaling.  1920x1080 (original) [200%]: Doubles the vertical and horizontal dimensions.  1920x1080→3840x2160 [Automatic]: Fits size to fill screen.   1920x1080→3840x2160 4096x2160→3840x2025 • In the following cases, the maximum magnification is 200% even if [Automatic] is selected. - When [Peaking], [False Color], or [Range Check] ➤ [Enable] is set to an option other than [Off] • In the following cases, images are shown in reduced size when [Automatic] is selected. - [4096x2160]: When [Image Division] ➤ [Square Division] is selected - [2048x1080]: When [Image Division] ➤ [Multi View (Dual)] is selected
Anamorphic	x2.0 x1.8 x1.5 x1.33 Off	Set when checking images photographed using an anamorphic lens. Displayed in accordance with the set magnification. • Settings are invalid in the following cases: - When [Peaking], [False Color], or [Range Check] ➤ [Enable] is set to an option other than [Off] - When the input signal resolution is 1280x720 or less

Sub Menu	Setting Options (Bold: factory default)	
Video Position (Multi View)	Top Middle Center	When using [Multi View (Quad)], [Multi View (Dual)], or [Single Input Dual View] Sets the vertical display position for the image. [Top]: Displays at the top of the screen. [Middle]: Displays at the top middle of the screen. [Center]: Displays at the middle of the screen.
Zoom	Enlarges part of the video image. The zoom function can be used when the resolution is [4096x2160], [3840x2160], [2048x1080] or [1920x1080]. - The zoom function cannot be used in the following cases: - During execution of [Playback File] under [Screen Capture] - During display of the test pattern - When [Multi View (Quad)], [Multi View (Dual)] or [Single Input Dual View] is selected - When [Picture Function Settings] ➤ [Compare View] ➤ [Enable] is set to [On] - While the zoom function is in use, the various markers are not displayed. - When zoom settings are changed, [Frame Hold] turns [Off].	
Zoom Preset	Zoom 1 Zoom 2 Zoom 3 Off	Sets the zoom display method. There are three presets.
Magnification	x2 x4 x8	Sets the display scale of zoom.
Position		The zoom adjustment screen is displayed. Use the jog dial to adjust the display position.
Frame Hold	On, Off	Pauses the video. - If the image quality setting is changed while the video is paused, the setting may not change correctly. - In the case of an interlaced signal, the video pauses in either field (odd or even).
I/PsF	Automatic Interlace PsF	Defines how the interlace signal or PsF signal is displayed. [Automatic]: Automatically determined based on payload and displayed. If there is no payload, the signal is displayed as an interlace signal. [Interlace]: Displayed as an interlace signal. [PsF]: Displayed as a PsF signal.
I/P Conversion	Automatic Normal	Select the interlaced signal I/P conversion method. [Automatic]: In this mode, video and still image are determined, and conversion corresponding to the type of image is automatically performed. [Normal]: In this mode, video and still image are not determined, and predetermined conversion processing is performed.

Audio Settings

This menu is used to set audio output.


Sub Menu	Setting Options (Bold: factory default)	
CH L (SDI)	CH1 to CH16 (CH1)	Sets the audio to be output from the two channels (L/R) of the headphone respectively.
CH R (SDI)	CH1 to CH16 (CH2)	
CH L (HDMI)	CH1 to CH8 (CH1)	
CH R (HDMI)	CH1 to CH8 (CH2)	
Volume (speaker)	0 to 100 (30)	Sets the volume of the speaker or headphone/AUDIO OUT terminal. (Increments of 1) • When the headphone is connected to the headphone terminal, output from the speaker stops. • The AUDIO OUT terminal can be used at the same time as the speaker. • The volume of the headphone and AUDIO OUT terminal is the same.
Volume (🔊 / AUDIO OUT)		

Marker Settings

This menu is used to configure various markers. The factory defaults differ according to the [Marker Preset] setting (45).

Sub Menu	Setting Options (Factory default)	
Marker Preset	Marker 1 to 5 Off	Customizes markers which are assigned to markers 1 to 5.
Aspect Marker ¹	[Aspect Marker] displays a range in accordance with the specified aspect ratio. 	
Enable	On, Off	Switches the aspect marker On, Off.
Mask	Black Half Off	Switches the mask color. Mask is the blanking area outside the range of the marker. [Black]:  [Half] (50% gray):  [Off]: Turns mask off.
Aspect Ratio	16:9, 15:9, 14:9, 13:9, 4:3, 2.39:1, 2.35:1, 1.896:1, 1.85:1, 1.66:1, Variable • When Variable is selected 1.00:1 to 3.00:1	Sets the aspect ratio of the aspect marker. The aspect ratio can be entered as a numeric value when you select [Variable] (0.01:1 increments). The grayed out slider becomes active and can be used to set the aspect ratio.
Line	On, Off	When [Mask] ➡ [Black] or [Half] Switches lines on mask On, Off.
Line Width	Thick Normal Thin	Sets the thickness of the aspect marker line.

Sub Menu	Setting Options (Factory default)	
Line Color	White, Red, Green, Blue, Yellow, Cyan, Magenta, Gray	Sets the color of the aspect marker line.
Line Brightness	High, Low, Half	Sets the brightness of the aspect marker line.
Safety Zone Marker 1, 2 ¹	There are two types of [Safety Zone Marker]: 1 and 2, which share the same settings. A safety zone marker is used to set the safe zone of the image (actual displayed area) to check the image. 	
Enable	On, Off	Switches the safety zone marker On, Off.
Aspect Ratio	16:9, 15:9, 14:9, 13:9, 4:3, 2.39:1, 2.35:1, 1.896:1, 1.85:1, 1.66:1, Variable • When Variable is selected 1.00:1 to 3.00:1	Sets the aspect ratio of the safety zone marker. [Variable]: The aspect ratio can be entered as a numeric value (0.01:1 increments). The grayed out slider becomes active and can be used to set the aspect ratio. When [Area Size] is set to [Variable (dot)], you cannot select [Aspect Ratio].
Area Size	80%, 85%, 88%, 90%, 93%, 95%, Variable (%), Variable (dot)	Sets the safety zone marker area size. [Variable (%]): The grayed out [Rate (%)] becomes active. [Variable (dot)]: The grayed out [Width (dot)] and [Height (dot)] become active.
Rate (%)	50 to 100	When [Area Size] ➤ [Variable (%)] Move the slider to set the displayed marker area size without changing the aspect ratio in 1 % increments.
Width (dot)	20 to 3840	When [Area Size] ➤ [Variable (dot)] Move the slider to set the area width in 2 dot increment.
Height (dot)	20 to 2160	When [Area Size] ➤ [Variable (dot)] Move the slider to set the area height in 2 dot increment.

Sub Menu	Setting Options (Factory default)	
Shape	Box Box (Mask) Brackets Enclosure	Sets the area shape of the safety zone marker. [Box]:  [Box (Mask)]:  [Brackets]:  [Enclosure]: 
Line Width	Thick Normal Thin	Sets the width of the safety zone marker line.
Line Color	White, Red, Green, Blue, Yellow, Cyan, Magenta, Gray	Sets the color of the safety zone marker line.
Line Brightness	High, Low, Half	Sets the brightness of the safety zone marker line.
H Position	-1920 to 1920	Adjusts the marker horizontal position with the set aspect and size (in increments of 2).
V Position	-1080 to 1080	Adjusts the marker vertical position with the set aspect and size (in increments of 2).

Sub Menu	Setting Options (Factory default)	
Area Marker1, 2 ¹	There are two types of [Area Marker]: 1 and 2, which share the same settings. [Area Marker] is used to check a specific area using a rectangular box. 	
Enable	On, Off	Switches the area marker On, Off.
H Position	0 to 3830	Sets the start position (x-coordinate) to draw the rectangle (in increments of 2).
V Position	0 to 2150	Sets the start position (y-coordinate) to draw the rectangle (in increments of 2).
Width (dot)	10 to 3840	Sets the width of the rectangle (in increments of 2).
Height (dot)	10 to 2160	Sets the height of the rectangle (in increments of 2).
Mask	Black Half Off	Switches the mask color (in the marker).
Line	On, Off	When [Mask] ➤ [Black] or [Half] Turns On/Off the outlines of the rectangular box.
Line Width	Thick Normal Thin	When [Mask] ➤ [Off] or [Line] ➤ [On] Sets the width of the area marker line.
Line Color	White, Red, Green, Blue, Yellow, Cyan, Magenta, Gray	When [Mask] ➤ [Off] or [Line] ➤ [On] Sets the color of the area marker line.
Line Brightness	High, Low, Half	When [Mask] ➤ [Off] or [Line] ➤ [On] Sets the brightness of the area marker line.

Sub Menu	Setting Options (Factory default)	
Center Marker ²	[Center Marker] shows the center of the image. 	
Enable	On, Off	Switches the center marker On, Off.
Size	Large Middle Small	Sets the size of the center marker.
Line Width	Thick Normal Thin	Sets the width of the center marker line.
Line Color	White, Red, Green, Blue, Yellow, Cyan, Magenta, Gray	Sets the color of the center marker line.
Line Brightness	High, Low, Half	Sets the brightness of the center marker line.
Grid Marker ³	[Grid Marker] is marker used to check the horizontal and vertical position. When [Distance]  [*** dots] When [Distance]  [***% (UHD)]  	
Enable	On, Off	Switches the grid marker On, Off.
Distance	160 dots 240 dots 320 dots 80% (UHD) 83% (UHD) 85% (UHD) 88% (UHD) 90% (UHD) 93% (UHD) 95% (UHD)	Sets the horizontal and vertical line distance. [160/240/320 dots]: Sets the line distance to the selected number of dots. [80% (UHD) to 95% (UHD)]: This indicates the percentage of the display area of the 3840x2160 area. The area of the selected ratio is indicated by the marker.
Line Width	Thick Normal Thin	Sets the width of the grid marker line.
Line Color	White, Red, Green, Blue, Yellow, Cyan, Magenta, Gray	Sets the color of the grid marker line.
Line Brightness	High, Low, Half	Sets the brightness of the grid marker line.

- ¹ The marker is not displayed in the following cases:
- When there is no signal, unsupported signal, or a channel with [Input Configuration] not set is selected
 - When an enlarged image is displayed
 - During the execution of [Playback File] under [Screen Capture]
 - When a [Test Pattern] is displayed
 - When using [Multi View (Quad)], [Multi View (Dual)], or [Single Input Dual View]
- ² The marker is not displayed in the following cases:
- When an enlarged image is displayed
 - When using [Multi View (Quad)], [Multi View (Dual)], or [Single Input Dual View]
- ³ The marker is not displayed in the following cases:
- When an enlarged image is displayed

■ Details of the factory default settings for marker preset

Item		Factory default	
		Marker 1 to 4	Marker 5
Aspect Marker	Enable	Off	On
	Mask	Off	Half
	Aspect Ratio	16:9	16:9
	When Variable is selected	1.78:1	1.78:1
	Line	On	On
	Line Width	Normal	Normal
	Line Color	White	Gray
	Line Brightness	Low	Half
Safety Zone Marker 1, 2	Enable	Off	On
	Aspect Ratio	16:9	16:9
	When Variable is selected	1.78:1	1.78:1
	Area Size	80%	Variable (dot)
	Rate (%)	80	80
	Width (dot)	3072	2200 (400*)
	Height (dot)	1728	100 (400*)
	Shape	Box	Box (Mask)
	Line Width	Normal	Normal
	Line Color	White	Gray
	Line Brightness	Low	Half
	H Position	0	0 (1650*)
	V Position	0	-850 (-800*)

Item		Factory default	
		Marker 1 to 4	Marker 5
Area Marker 1, 2	Enable	Off	On
	H Position	240	240 (3500**)
	V Position	120	120 (60**)
	Width (dot)	240	240
	Height (dot)	120	120 (240**)
	Mask	Off	Half
	Line	On	On
	Line Width	Normal	Normal
	Line Color	White	Gray
	Line Brightness	Low	Half
Center Marker	Enable	Off	On
	Size	Middle	Small
	Line Width	Normal	Normal
	Line Color	White	White
	Line Brightness	Low	Half
Grid Marker	Enable	Off	On
	Distance	160 dots	85% (UHD)
	Line Width	Normal	Normal
	Line Color	White	White
	Line Brightness	Low	Half


* When Safety Zone Marker 2 is used

** When Area Marker 2 is used

Function Settings

This menu is used to set the image signal information display and the cinema camera link function.

Sub Menu	Setting Options (Bold: factory default)	
Time Code ¹	Display the time code superimposed on the signal. 	
Enable	On, Off	Switches the time code display On, Off.
Type	VITC LTC	Selects the type. • This setting becomes invalid when HDMI signal is input and is fixed to [VITC].
VITC Field Flag	On, Off	Select whether or not to use the field flag when the VITC time code is displayed.
Size	Large Small	Selects the size.
Position	Top Left Top Right Bottom Left Bottom Right	Selects the display position. • This setting becomes invalid in the [Multi View (Dual)] display. • When [Top Left] or [Top Right] is selected: When set to [Audio Level Meter] ➤ [Enable] ➤ [On], the time code will not be displayed.
H Offset	0 to 1332 (0)	Adjusts the display position of the time code. • When [Multi View (Dual)] is displayed, the [H Offset] setting is invalid.
Type String Display	On , Off	Sets display of VITC/LTC strings.
Brightness	Normal , Half	Sets the Brightness of the strings.
Audio Level Meter ¹	Configures various settings for the audio level meter. Displays the audio level of the selected channel number.	
Enable	On, Off	Switches the audio level meter On, Off.
Channel Number (SDI)	2CH 4CH 6CH 8CH 16CH	Sets the number of channels displayed when SDI signal is input.
Channel Number (HDMI)	2CH 4CH 6CH 8CH	Sets the number of channels displayed when HDMI signal is input.

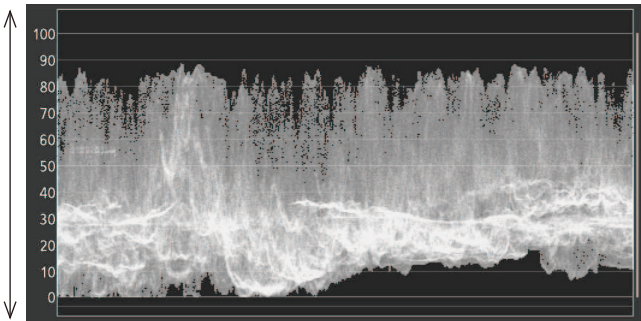Sub Menu	Setting Options (Bold: factory default)	
Channel Order	Normal Grouping	Sets the order of channels. [Normal]: Odd-numbered channels are shown on the left side, even-numbered channels on the right side “([1, 3, 5, 7] etc.) on the left, ([2, 4, 6, 8] etc.) on the right”. [Grouping]: Channels are shown in sequence on the left and right sides “([1, 2, 3, 4] etc.) on the left, ([5, 6, 7, 8] etc.) on the right”.
Size	Large Small	Sets the size of the display. In [Single Input Dual View] display when [Channel Number (SDI)] is set to [16CH], this setting is invalid.
Position	Normal Left	Selects the display position. [Normal]: Displays the audio level meter on both ends. [Left]: Indication on the right side is displayed toward the center of the screen. This prevents the indication from overlapping with the banner.
Peak Hold	On , Off	One second of audio signal at the peak is kept.
Reference Level	-40 to 0 (-20)	Sets the reference level.
Brightness	Normal Low Half	Sets brightness for the audio level meter.
Wave Form Monitor ¹	Configures various settings for the wave form monitor. On the wave form monitor, the horizontal axis shows the horizontal resolution of the video and the vertical line shows the signal level. To the right of the wave form monitor, [Color Range] and [HDR Range] information (vertical line) is displayed. 	
Enable	On, Off	Switches the wave form monitor On, Off.
Select Signal	Y , Cb, Cr, R, G, B	Sets the waveform to be displayed. When one of [R], [G] or [B] is selected, the non-constant value is displayed even if [2020 Constant Luminance] is set to [Constant].

Sub Menu	Setting Options (Bold: factory default)	
Scale	Automatic IRE SMPTE ST 2084 (PQ) Hybrid Log-Gamma Canon Log Canon Log 2 Canon Log 3 S-Log2 S-Log3 ARRI (Rec2100-PQ-1K-100) ARRI (Rec2100-HLG-1K-200)	Sets the scale of the wave form monitor. [Automatic]: Sets in accordance with the [Gamma/EOTF] and [Color Range] settings. When [SMPTE ST 2084 (PQ)], [Canon Log], [Canon Log 2], or [Canon Log 3] is set (including [Automatic]): When [Gamma/EOTF]  [SMPTE ST 2084 (PQ)], the item is displayed in accordance with the [Color Range] settings ([SDI Full (4-1019)] is set to [Full]).
Reference Line	4 to 1023	A guide is displayed at the specified position. [Reference Line] is not displayed when [1023] is selected.
Reference Level	Automatic Manual	Sets the range of the reference level. Tints the outside of the range of the reference level. In the case of [Gamma/EOTF] corresponding to the HDR range, parts that exceed the HDR range are tinted. When [Color Range]  [Limited], outside the limited range is tinted. [Automatic]: Sets in accordance with the [Gamma/EOTF] and [Color Range] settings.
Reference Level High	468 to 1023	Sets the reference display level (high). [Reference Level High] is not displayed when [1023] is selected.
Reference Level Low	0 to 468	Sets the reference display level (low). [Reference Level Low] is not displayed when [0] is selected.
Color	Sets the signals to be displayed and the color of signals exceeding the reference level.	
Y	White	[Y], [Cb], [Cr], [R], [G], [B]: Selects the color of the selected signal. Default value of each signal is shown below. Y (White), Cb (White), Cr (White), R (Red), G (Green), B (Blue) [Reference Level High], [Reference Level Low]: Selects the color of the signal of the selected reference level. Default value of each reference level is shown below. Reference Level High (Magenta), Reference Level Low (Cyan)
Cb	Red	
Cr	Green	
R	Blue	
G	Yellow	
B	Cyan	
Reference Level High	Magenta	
Reference Level Low		
Position	Bottom Left Bottom Right	Selects the display position. This setting becomes invalid in the [Multi View (Dual)] display.
Size	Large, Middle , Small	Sets the size of the display.

Sub Menu	Setting Options (Bold: factory default)	
Vector Scope ¹	Configures various settings for the vector scope. Vector scope displays the intensity of color signals and hue with the horizontal axis showing the color difference signal Cb and the vertical line showing Cr.	
Enable	On, Off	Switches the vector scope On, Off.
Target	75% 100% 75%+100%	Sets the target.
Position	Bottom Left Bottom Right	Selects the display position. This setting becomes invalid in the [Multi View (Dual)] display.
Size	Large, Middle , Small	Sets the size of the display.
Pixel Value Check ¹	Measures and displays the RGB value of the specified pixel (cursor) position. When [Gamma/EOTF] is set to [SMPTE ST 2084 (PQ)] or [Hybrid Log-Gamma], the brightness value is also displayed. The non-constant value is displayed even if [2020 Constant Luminance] is set to [Constant].	
Enable	On, Off	Switches the pixel value check On, Off.
H Position	1 to 4096 (960)	Sets the pixel position (horizontal).
V Position	1 to 2160 (540)	Sets the pixel position (vertical).
Reset Position	Normal Around Peak Luminance	Sets operation when the RESET button is pressed. [Normal]: Resets the value to the default value. [Around Peak Luminance]: Moves closer to the area of peak luminance inside the display image.
Chromaticity Diagram	On , Off	Switches the chromaticity diagram On, Off. [On]: Displays the chromaticity diagram. The chromaticity diagram is displayed only when [Color Gamut] and [Gamma/EOTF] are set as shown below. [Color Gamut]: ITU-R BT.2020, ITU-R BT.709 [Gamma/EOTF]: 1.0, 2.2, 2.35, 2.4, 2.6, SMPTE ST 2084 (PQ), Hybrid Log-Gamma

Sub Menu	Setting Options (Bold: factory default)	
Test Pattern	White (1023) White (940) Gray Black (64) Black (0) Ramp Color Bars Color Bars (PQ Full) Color Bars (PQ Limited) Color Bars (HLG) PLUGE PLUGE (PQ/HLG) Off	Sets the test pattern built into the main unit. • If the power is turned off once and then back on, the test pattern will not be displayed. • The test pattern will be erased in the following cases: - When a channel is changed using the CH button, F button assigned for Channel UP/Channel DOWN, or [Select Channel] under [Channel Settings] - When changing [Input Configuration] or [Select Input Signal] under [Channel Settings] - When [Reset All Settings] is executed
Signal Monitoring	Monitors the input signal status. • [Signal Monitoring] cannot be used in the following cases: - When [Single Input Dual View] is displayed - When an enlarged image is displayed - During display of the test pattern - During execution of [Playback File] under [Screen Capture] • When an error is displayed, [In Monitor Display] will not be shown. • The position the error is displayed can be adjusted with [In Monitor Display] ➤ [Position].	
Control	On, Off	Sets whether [Signal Monitoring] is used or not.
Error Hold	On (No time out) On (5 sec.) Off	Sets the length of time for displaying errors, when they are detected. [On (No time out)]: Errors continue to be displayed. To hide the displayed error, press the RESET button when closing the OSD menu. [On (5 sec.)]: The displayed error will disappear 5 seconds after the initial detection. [Off]: Only displays errors during the period when they are detected. The displayed error message will disappear once the error ends.
No Signal/Unsupported Signal	On , Off	Displays an error when there is [No Signal] or [Unsupported Signal].
2SI LinkOrder	On , Off	Displays an error when the cables inserted into the input terminals are in the wrong order when using signals input via [2 Sample Interleave].
SDI CRC Error	On, Off	Displays an error when an incorrect SDI signal is detected (CRC error).
8K 2SI Format	On, Off	Monitors the input signal status for the four terminals using the SDI signal when [Channel Settings] ➤ [Select Input Signal] is set to [Automatic].
Export	Exports the error history to USB memory. The file name is "signal_error_xxx.txt (xxx is a number)".	
Error Log		Displays error history.

Sub Menu	Setting Options (Bold: factory default)	
Screen Capture	Captures the screen.	
Capture		Captures the screen. The data is saved under the name "YYYYMMDD_hhmmss.bmp" in the root folder of the USB memory.
Frame Hold	On, Off	Pauses the video.
Capture Source	All Video	Selects the sources to capture. [All]: Everything is captured including video assistance functions such as markers and wave form monitor as well as OSD menu. [Video]: Only video signals are captured.
Create HDR/SDR Compare File	On, Off	Creates a file that lets you compare the brightness of HDR and SDR images on a computer. When saving, [_pc] is appended to the file name.
Playback File	Select File Execute	Plays back captured images. [Select File]: Selects a file. [Execute]: Plays back the image. - When playing back captured images on other video display or PC, color may not be played back precisely. - Files created using [Create HDR/SDR Compare File] will not be displayed in the [Select File] screen.
Finish Playback File		Finishes playback.
Camera Link	Sets the functions to link with Cinema EOS cameras and ARRI / Panasonic cinema cameras.	
Automatic Adjustment (CINEMA EOS)	When [Picture Mode]  [CINEMA EOS SYSTEM], [Input Configuration]  [12-3G/HD-SDI] Sets whether or not to link to the camera's image quality setting.	
	On , Off	Refer to the Setting Values Correspondence Table when [Color Gamut/Gamma/EOTF], [Color Temperature], and [Color Range] are all set to [On]. ( 54)
	Color Gamut/ Gamma/EOTF	The image quality of the display corresponds to the camera's settings.
	Color Temperature	
	Display Color Gamut	ITU-R BT.709 ITU-R BT.2020 DCI-P3 Sets the color gamut shown on the display when the camera's [Color Space] is set to [Cinema Gamut] or [DCI-P3+].
Automatic Adjustment (ARRI)	When [Picture Mode]  [User 6] to [User 7], [Input Configuration]  [12-3G/HD-SDI] Sets whether or not to link to the camera's image quality setting.	
	On , Off	Refer to the Setting Values Correspondence Table. ( 55)
	User LUT	Rec2100-PQ-1K-100 Rec2100-HLG-1K-200 3D-LUT 1-8 When [Automatic Adjustment (ARRI)]  [On] Sets the color gamut and gamma/EOTF shown in the display.

Sub Menu	Setting Options (Bold: factory default)	
Automatic Adjustment (VARICAM)	When [Picture Mode] ➤ [User 6] to [User 7], [Input Configuration] ➤ [12-3G/HD-SDI] Sets whether or not to link to the camera's image quality setting.	
	On, Off	Refer to the Setting Values Correspondence Table. (55)
User LUT	V-Log to V-709 3D-LUT 1-8	When [Automatic Adjustment (VARICAM)] ➤ [On] Sets the color gamut and gamma/EOTF shown in the display.
Anamorphic	On, Off	When a Canon camera is connected, displays in accordance with the settings when anamorphic lens display settings are included in the camera metadata.
Camera Information	Automatic On Off	Sets conditions to display camera information. [Automatic]: Camera information is displayed for 4 seconds when the information has changed. [On]: Camera information is always displayed. [Off]: Camera information is not displayed. • Not displayed when Multi View (Quad) / Multi View (Dual).

¹ The information display functions that can be displayed vary depending on the video display's settings or the input signal status.

	Time Code	Audio Level Meter	Wave Form Monitor	Vector Scope	Pixel Value Check
When [Frame Hold] is [On]	—	—	●	●	●
During execution of [Playback File] under [Screen Capture]	—	—	—	—	—
When [Test Pattern] is displayed	—	—	●	●	●
When [Multi View (Quad)] is displayed	—	—	—	—	—
When [Multi View (Dual)] is displayed	—	—	—	—	—
When [Single Input Dual View] is displayed	●	●	●	●	—
When [Picture Function Settings] ➤ [Compare View] ➤ [Enable] is set to [On], [Single Input Dual View] is set to [Off] and also the resolution is 4096x2160 or 3840x2160	●	●	—	—	—
While images other than resolution 4096x2160 / 3840x2160 / 2048x1080 / 1920x1080 are displayed, or when there is no signal or the input signal is unsupported	●	●	—	—	—

● : Can view — : Cannot view

■ Parameter of Cinema EOS cameras and Canon displays

Cinema EOS cameras	Canon display	
Color Space	Color Gamut	Color Temperature
BT.709	ITU-R BT.709	D65
BT.2020	ITU-R BT.2020	D65
DCI-P3	DCI-P3	DCI-P3
Cinema Gamut	Cinema Gamut to 709	D65
	Cinema Gamut to 2020	D65
	Cinema Gamut to DCI	DCI-P3

Cinema EOS cameras	Canon display	
Gamma/EOTF	Gamma/EOTF	HDR Range
Canon Log	Canon Log (HDR)	—
Canon Log 2	Canon Log 2 (HDR)	
Canon Log 3	Canon Log 3 (HDR)	
ST 2084, PQ	SMPTE ST 2084 (PQ)	1000
Normal (BT.709)	2.2	—
EOS Std.		
Wide DR	2.4	
DCI-P3	2.6	

■ Parameter of ARRI Cinema camera and Canon displays

ARRI Cinema camera	Canon display				
Color Space	Display Color Gamut	CDL/User LUT	Color Gamut	Gamma/EOTF	HDR Range
REC 709	—	—	ITU-R BT.709	2.2	—
REC 2020	—	—	ITU-R BT.2020	2.2	—
Wide Gamut Log C	Rec2100-PQ-1K-100	ARRI (Rec2100-PQ-1K-100)	ITU-R BT.2020	SMPTE ST 2084 (PQ)	1000
	Rec2100-HLG-1K-200	ARRI (Rec2100-HLG-1K-200)	ITU-R BT.2020	Hybrid Log-Gamma	—
	3D-LUT 1-8	User LUT 1-8	—	—	—

■ Parameter of Panasonic Cinema camera and Canon displays

Panasonic Cinema camera	Canon display				
Color Space	Display Color Gamut	CDL/User LUT	Color Gamut	Gamma/EOTF	HDR Range
V-709	—	—	ITU-R BT.709	2.2	—
V-Log	V-Log to V-709	VARICAM (V-Log to V-709)	ITU-R BT.709	2.2	—
	3D-LUT 1-8	User LUT 1-8	—	—	—

Picture Function Settings

This menu is used to set video assistance functions, for example.

56

Sub Menu	Setting Options (Bold: factory default)	
Peaking ¹	The outline is displayed in a color, used to check the focus. Customizes peakings which are assigned to Peaking 1 or Peaking 2.	
Enable	Peaking 1 Peaking 2 Off	Switches the peaking display mode and also sets peaking to Off.
Monochrome	When [Peaking 1] On , Off When [Peaking 2] On, Off	Displays video in monochrome.
Frequency	When [Peaking 1] Low, Middle , High When [Peaking 2] Low, Middle, High	Sets the central frequency of contour enhancement signals.
Range	-3 ~ 3 (0)	Sets the width of the range to be colored.
Color	White, Red , Green, Blue, Yellow, Cyan, Magenta	Sets the color to be used.
False Color ¹	Displays different colors for the video's brightness levels to make it easier to check the exposure and brightness distribution. Customizes the false color and sets it to false color 1 or false color 2.	
Enable	False Color 1 False Color 2 Off	Switches between False Color display mode and non-display.
Type	Automatic IRE	Sets the tint color display method. [Automatic]: Sets in accordance with the [Gamma/EOTF] settings. When [IRE] is selected, [Range - SDR] and [Range - HDR] settings become invalid.
Range - SDR	When [False Color 1] On, Off When [False Color 2] On, Off	Sets whether to tint the SDR area. When [On], sets the size of the area to be tinted. (10 to 100: increments of 5, 100 to 200: increments of 10) Monochrome/Brown: 10 to 190 (40) Brown/Monochrome: 20 to 200 (85)

Sub Menu	Setting Options (Bold: factory default)	
Range - HDR	When [False Color 1] Automatic Automatic (Over Range) Manual When [False Color 2] Automatic Automatic (Over Range) Manual	Sets the tint color range. [Automatic]: Sets the upper limit automatically in accordance with the [Gamma/EOTF] settings. When [Manual] or [Automatic (Over Range)] is selected, sets the size of the area to be colored.
Range Check ¹	Displays video in monochrome, with the areas where the set range is exceeded are shown tinted. Customizes Range Check and sets it to Range Check 1, 2.	
Enable	Range Check 1 Range Check 2 Off	Switches the Range Check display mode On, Off.
Over Range	Automatic , Manual	Displays video in monochrome, with the areas where the set range is exceeded are shown tinted. [Automatic]: Outside the range of the [Color Range] settings is tinted. When [Gamma/EOTF] ► [SMPTE ST 2084 (PQ)] or [Hybrid Log-Gamma], outside the range of the [Color Range] and [HDR Range] settings is tinted. [Manual]: Only areas that exceed the range set at [SMPTE ST 2084 (PQ)] or [Hybrid Log-Gamma] are tinted.
SMPTE ST 2084 (PQ)	100 to 10000 (1000)	When [Over Range] ► [Manual] Sets the tint color range. (100 to 1000: 10 increments, 1000 to 4000: 100 increments, 4000 to 10000: 1000 increments)
Hybrid Log-Gamma	100 to 1000 (1000)	When [Over Range] ► [Manual] Sets the tint color range. (10 increments)
Other	512 to 1023 (940)	When [Over Range] ► [Manual] Sets the tint color range. (1 increments)
2020 Outside of Gamut View ¹	When [Picture Mode] or [Color Gamut] ► [ITU-R BT.2020] Displays video in monochrome, with the areas where the color gamut exceeds the selected color gamut shown in red.	
Enable	On, Off	Switches between On and Off for [2020 Outside of Gamut View].
Color Gamut	ITU-R BT.709 Native	Sets the [Color Gamut] to be set as out of color gamut.
Range	0 to 512 (0)	Sets the range when tinting dark areas. (1 increments) 0: Tints all dark areas. 512: Dark areas at the set values or less are not tinted.

Sub Menu	Setting Options (Bold: factory default)	
Monochrome ²	On, Off	Video is displayed in monochrome.
Blue Only ²	On, Off	Cuts red and green signals, and displays only blue signals in monochrome. • [Blue Only] cannot be set when [CDL/User LUT] is a setting other than [CDL 1-8] or [Off].
Red Off ²	On, Off	Video is displayed with red signals cut.
Green Off ²	On, Off	Video is displayed with green signals cut.
Blue Off ²	On, Off	Video is displayed with blue signals cut.
Compare View ¹	Images having different image quality settings are displayed on the left and right screens for comparison. (When [Picture Mode] for left and right screens is the same) • When a signal with a resolution of 2K or smaller is displayed on a single screen, changes to [Single Input Dual View]. • This cannot be set when [2020 Constant Luminance] is set to [Constant] and the [Format] signal method is ICtCp or XYZ.	
Enable	On, Off	Sets Comparison mode On or Off.
Type	Automatic HDR/SDR CDL/User LUT	Sets the type of the image to compare. [Automatic]: [HDR/SDR] when [Adjustment]  [CDL/User LUT] is [Off], otherwise set at [CDL/User LUT]. [HDR/SDR]: HDR and SDR images are displayed. [CDL/User LUT]: The image on which [CDL] or [User LUT] is applied is displayed only in the left screen. • Not settable in the following cases: - When [Color Gamut] is set to [Cinema Gamut to XXX] or [S-GamutXXX] - When [Gamma/EOTF] is set to [Canon Log], [Canon Log 2] or [Canon Log 3]
HDR/SDR Convert Method	2020 HDR to 709 SDR 2020 HDR to 2020 SDR User LUT 1-User LUT 8 Off	When [Type] is set to [HDR/SDR] or [Automatic (HDR/SDR)] Sets the display method of the screen set to SDR. [2020 HDR to 709 SDR], [2020 HDR to 2020 SDR]: Setting differs according to the [Gamma/EOTF] settings. [SMPTE ST 2084 (PQ)]: The [User LUT] corresponding to each setting is applied. [Hybrid Log-Gamma]: The [User LUT] corresponding to each setting is applied. [Canon Log(HDR)], [Canon Log 2(HDR)], [Canon Log 3(HDR)]: [Canon Log], [Canon Log 2] or [Canon Log 3] is applied. [S-Log2 (HDR)], [S-Log3 (HDR)]: [HDR Range] setting [100] is set. [User LUT 1-8]: The specified [User LUT] is applied. After applying [User LUT] the adjustment inside the display fixes [Color Gamut] at [ITU-R BT.709] and [Gamma/EOTF] at [2.4]. [Off]: Only brightness is lowered.

Sub Menu	Setting Options (Bold: factory default)	
Luminance (SDR)	50.0 to 200.0 (100.0)	When [Type] is set to [HDR/SDR] or [Automatic ([HDR/SDR])] Sets the luminance of the SDR side.
Color Temperature (SDR)	Normal , D93, D65, D65 Custom, DCI-P3	When [Type] is set to [HDR/SDR] or [Automatic ([HDR/SDR])] Sets the SDR color temperature.
Gain (SDR)	-15 to 15 (0)	When [Type] is set to [HDR/SDR] or [Automatic ([HDR/SDR])] Sets the SDR gain.
User LUT Target 1	User LUT 1 to User LUT 8, Off	When [Type] is set to [CDL/User LUT] or [Automatic ([User LUT])] Sets the comparison target.

- ¹ • [Peaking], [False Color], [Range Check], [2020 Outside of Gamut View], [Compare View]: Operation in accordance with the configuration of the video display

	Peaking	False Color	Range Check	2020 Outside of Gamut View	Compare View
When [Monochrome], [Blue Only], [Red Off], [Green Off], or [Blue Off] ➤ [On]	—	—	—	—	—
During execution of [Playback File] under [Screen Capture]	—	—	●	●	●

● : Can be displayed/set. — : Cannot be displayed/set.

- [Peaking], [False Color], [Range Check], [2020 Outside of Gamut View], and [Compare View] cannot be displayed simultaneously.
- ² • When the power is turned off and on, becomes [Off].
- Cannot be set when [Peaking], [False Color], [Range Check], [2020 Outside of Gamut View], or [Compare View] ➤ [Enable] ➤ [On] (other than [Off]).

Network/IMD Settings

Sub Menu	Setting Options (Bold: factory default)	
LAN	Configures video display's network settings. • Cannot be set when [Power on Setting] is [User 1] to [User 3].	
Configure an IP Address	Automatic Manual	[Automatic]: Configures an IP address automatically with DHCP/Auto IP. [Manual]: Configure an IP address and subnet mask manually.
Display	192.168.0.1	
Subnet Mask	255.255.255.0	
In Monitor Display	The video display supports Television Systems Ltd.'s "TSL UMD Protocol Ver. 5.0". You can operate the video display using an external device connected to the LAN terminal and display characters and tally lights on the screen. You can input any characters you like directly from this video display. (📖 18)	
Control	TSL Ver. 5.00 Manual Off	Sets whether or not to receive the control signal from the connected device. [Manual]: Select to input the characters on this video display. Does not receive a control signal from the connected device.
Position	Top Bottom	This sets whether the characters and tally lights will be displayed at the top or the bottom.
Manual Display Type	Automatic Single Dual A,B, Dual C,D Quad A,B,C,D	[Automatic]: Changes display in accordance with the Input Configuration. [Single]: Single-screen display. [Dual A,B], [Dual C,D]: Dual-screen display. [Quad A,B,C,D]: Quadruple-screen display. • When [Function Settings] ➤ [Signal Monitoring] ➤ [Control] is set to [On] then [Manual Display Type] is fixed to [Automatic].
Manual String	(Single) (Dual/Quad A) (Dual/Quad B) (Dual/Quad C) (Dual/Quad D) (Single Dual L) (Single Dual R)	When [Control] ➤ [Manual] Sets the characters to display for the selected [Manual String]. You can input up to 16 alphanumeric characters.

System Settings

This menu is used to configure system settings related to the video display.

Sub Menu		Setting Options (Bold: factory default)	
Function/Channel Button		Sets the function or channel to assign to the F buttons or CH button.	
Function Button		Sets the function to assign to the F buttons of the main unit (📖 13). Select an F button and assign a function from the following list (📖 66).	
Function Button (ALT)			
Channel Button		Sets the channel to assign to the CH button on the display.	
CH1		CH1 to CH20 (CH1)	Select a CH button and register a channel number. A list of settings under the menu [Channel Settings] (📖 34) is displayed.
CH2		CH1 to CH20 (CH2)	
CH3		CH1 to CH20 (CH3)	
GPI		You can operate the video display using an external controller such as a switcher that has been connected to the GPI terminal. Operates by connecting (shorting) the GND (No. 8 Pin) to No.s 1 to 7. • This function will not work correctly in the following cases. - If the same function is assigned to multiple pins. - If the changes to this menu item setting and the pin assignments were made when the pins were shorted	
Type	Level, Short Edge	[Level]: Operates while shorted. [Short Edge]: Switches between “operate”/”do not operate” for each short.	
Pin1 ~ Pin7		Assigns functions in each GPI pin. (📖 17) Functions that can be registered: ITU-R BT.709, ITU-R BT.2020, Adobe RGB, DCI-P3, User 1 (2020 PQ), User 2 (2020 HLG), User 3 (DCI PQ), User 4 (DCI PQ D65), User 5 ~ User 9, CINEMA EOS SYSTEM, ACESproxy (ver. 1.0.1), CH1 to CH5, Marker 1 to Marker 3, Time Code, Audio Level Meter, Wave Form Monitor, Vector Scope, False Color 1/2, Monochrome, Blue Only, Red Off, Green Off, Blue Off, Compare View, MENU, Tally Green, Tally Red, Power On, — (Not set) • About [Tally] A tally appears at the top of the screen. Combining [Tally Green] and [Tally Red] makes [Tally Amber]. • [Power On]: Can only be registered to [Pin7].	
Language	English 日本語 简体中文	Sets the language of the OSD menu and messages.	
Date/Time		Sets the year/month/date/hour/minute.	

OSD Menu

Sub Menu	Setting Options (Bold: factory default)	
Display Name	Sets the name of the main unit. You can input up to 16 alphanumeric characters.	
OSD Settings		
Banner	Sets the banner display method for the channel name, signal information, and status of the video display.	
Automatic Display	On , Off	Automatically displays the banner when the input signal or picture mode are changed.
Picture Mode	On , Off	Sets whether to display [Picture Mode].
Time Out	On , Off	The banner automatically disappears.
Function Button Guide	On , Off	[On]: When all OSD are hidden, you can display the list of functions assigned to an F button on the video display by operating the jog dial. [Off]: Function Button Guide is not displayed.
OSD Brightness	Automatic (High - Middle) Automatic (High - Low) High Middle Low	Sets the brightness of the OSD. The brightness is automatically adjusted to suit the luminance when [Automatic] is selected. You can choose between [High - Low] and [High - Middle] adjustment ranges.
Protect Settings	Locks the settings so they cannot be changed. When you press the MENU button, [Signal/System Information] appears, but other operations are grayed out because they are locked.	
Password		Set a password to protect settings. Use a four-digit number (0000 to 9999). The initial password is blank.
Protect Target		You can remove Picture Mode and Select Channel from the items to be protected.
Picture Mode	On , Off	When set to [On], protects the [Picture Mode] settings.
Select Channel	On , Off	When set to [On], protects the [Select Channel] settings.
Function Settings	On , Off	When set to [On], protects the [Function Settings] and [Picture Function Settings] settings.
Protect		Select [OK] to protect. When a password has been set, enter the password and select [OK]. ❖ Unlocking Protect Settings Move the selection frame to [Protect] and press the Jog dial for approximately 3 seconds. When a password has been set, enter the password and select [OK].

Sub Menu	Setting Options (Bold: factory default)	
Power Save	120 min., 60 min., 30 min. , Off	Automatically turns off video display's power supply when there is no video signal input. The message [No Signal, Turn off power by Power Save function.] is displayed when there is no signal input for the selected time. Approximately 5 minutes later, the message will read [No Signal, Turn off power.] and the power will be turned off. The power is not automatically turned off when this function is set to [Off].
Power Indicator/Button LED Settings		
Power Indicator Brightness	Off 1 to 5 (3)	Adjusts the brightness of the power indicator on the main unit. The greater the number, the higher the brightness.
Display Button LED	On , Off	Sets the F buttons and the lamp on the face.
Button Name Lighting Time	Always, 60 sec. , 30 sec., 10 sec., 5 sec.	Sets the time (sec) until the lamp on the face goes out, if no operation is performed. [Always]: The lamp on the face is always lit.

Sub Menu	Setting Options (Bold: factory default)	
Firmware/License Update	This function is used to update the video display firmware. Refer to the Canon website for detailed information.	
Export/Import ¹	Sets the export/import OSD menu settings.	
Export		
Target	USB User 1 to User 3	Select the export destination. [USB]: Export to a USB memory. [User 1] to [User 3]: Export to the built-in memory of the main unit.
Filename		When [Target] ➤ [USB] Factory default is "dinfo_dpv****.dat" (****: number of the product name). You can change the name of the file to be exported to the USB memory within 16 one-byte characters including alphabetical characters, numbers, and symbols.
Execute		Performs export.
Import		
Target	USB User 1 to User 3	Specify the save destination for the file to be imported.
Filename		Displays files with the extension ".dat" so you can select from among them.
Settings	All Adjustment Channel Settings Display Settings Audio Settings Marker Settings Function/Network/ System Settings	Select the settings to import.
Execute		Performs import.
Power on Setting	Last memory User 1 to User 3	You can select the state of the display when the power is turned on. [Last memory]: Launches with the same settings as when the power was turned off the previous time. [User 1] to [User 3]: It starts up with the settings saved in [User 1] to [User 3] under [Export].
Reset All Settings	OK Cancel	Returns all settings to factory default. When selected, the message [Reset all settings to factory defaults?] appears. [OK]: Performs reset. [Cancel]: Returns to the previous screen without resetting.

- ¹ • The following settings cannot be exported or imported.

Adjustment	CDL/User LUT Bypass
Display Settings	Zoom Preset, Frame Hold
Function Settings	Test Pattern
Picture Function Settings	Peaking (Enable), False Color (Enable), Range Check (Enable), 2020 Outside of Gamut View (Enable), Monochrome, Blue Only, Red Off, Green Off, Blue Off, Compare View (Enable)
System Settings	Date/Time, Export/Import, Power on Setting

- User LUT data cannot be exported or imported to [User 1] to [User 3] under [Target].
- The main menu cannot be imported or exported between the video display and other products.

■ Function to allow registration for the display F buttons (61)

Item	Options
Adjustment	Picture Mode
	Luminance
	Brightness
	Chroma
	Chroma Up
	Backlight Control
	Gamma/EOTF
	HDR Range
	Gain
	Bias
	xy
Picture Mode	ITU-R BT.709
	ITU-R BT.2020
	Adobe RGB
	DCI-P3
	User 1 (2020 PQ)
	User 2 (2020 HLG)
	User 3 (DCI PQ)
	User 4 (DCI PQ D65)
	User 5 ~ User 9
	CINEMA EOS SYSTEM
	ACESproxy (ver. 1.0.1)
CDL/User LUT	CDL/User LUT
	CDL RGB
	CDL R
	CDL G
	CDL B
	CDL SOP/SAT
	CDL Slope
	CDL Offset
	CDL Power
	CDL Saturation
	CDL/User LUT Bypass
	CDL Export/Import

Item	Options
Channel Settings	Channel List
	Select Input Signal
	Audio Input
	Single Input Dual View
	CH1 to CH20
Display Settings	Screen Scaling
	Anamorphic
	Zoom Preset
	Zoom 1
	Zoom 2
	Zoom 3
Audio Settings	Frame Hold
	CH L
	CH R
	Volume
Marker Settings ¹	Mute
	Marker Preset
	Marker 1
	Marker 2
	Marker 3
	Marker 4
	Marker 5

Item	Options
Function Settings	TC/ALM
	Time Code
	Audio Level Meter
	WFM/VEC
	Wave Form Monitor
	WFM Select Signal
	Vector Scope
	Pixel Value Check
	Signal Monitoring Log
	Capture
	Camera Information
Picture Function Settings	Peaking
	Peaking 1
	Peaking 2
	False Color
	False Color 1
	False Color 2
	Range Check
	Range Check 1
	Range Check 2
	2020 Outside of Gamut View
	Monochrome
	Blue Only
	Red Off
	Green Off
	Blue Off
	Compare View
System Settings	Signal Information
	Hide OSD ²

¹ When any marker settings are changed using an F button, those changes will be applied to [Enable] under the currently selected [Marker Preset].

² [Hide OSD] is a function to hide all OSD. When [On] is selected, OSD and [Separator] are hidden but the menu can be used.

Signal Information

Shows the signal information. When [Select Input Signal] is [Quad Input], information for the entire signal and each input is displayed. Select a signal with the jog dial according to the guide at top right corner of the menu. When signal information has been obtained although it is not displayed on the screen, the content of the information is grayed out.

SDI Signal		HDMI Signal	
Item	Display Example	Item	Display Example
Channel	CH1	Channel	CH4
Input Configuration	12-3G/HD-SDI (3G-A)	Input Configuration	HDMI
Select Input Signal	Quad Input	Format	Automatic
Image Division	Automatic	Resolution	4096x2160
Format	Automatic	Picture Rate, I/P/PsF	60.00P
Resolution	4096x2160	Pixel Encoding, Color Depth	4:2:2 YCbCr 10-bit
Picture Rate, I/P/PsF*	24.00P	Matrix	ITU-R BT.709
SDI Payload ID	89 C3 46 01	Range	Full
Video Standard	3G-SDI	EOTF	SMPTE ST 2084 (PQ)
Sampling Structure, Bit Depth	4:4:4:4 GBRA 10-bit	Max Luminance (Peak/Avg.)	1000 / 500 cd/m ²
Picture Rate	24.00	Display Luminance (Max/Min)	1000 - 0.005 cd/m ²
Scanning Method	Progressive/Progressive (Transport/Picture)	White Point	x=0.313, y=0.329
Link Number	Single/Link_1	Primary Color Red	x=0.640, y=0.330
Colorimetry	UHD	Primary Color Green	x=0.300, y=0.600
Transfer Characteristics	SDR-TV	Primary Color Blue	x=0.150, y=0.060

* When content is grayed out, an asterisk [*] may be displayed indicating low [Picture Rate] accuracy such as [24.00P *].

System Information

Shows the video display status and network information.

Item	Display Example
Display	DP-V1830
Serial No.	000000000000
Firmware/License Ver.	1.0
Usage Time*	5 h
IP Address	192.168.0.1
Subnet Mask	255.255.255.0
MAC Address	FF:FF:FF:FF:FF:FF

* The [Usage Time] is not always [0] when you purchase the display due to factory inspection.

Supported Signal Format

SDI

69

Transmission method	Signal format	Color format	Color depth	Standards
HD-SDI	1280x720P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 292-1 SMPTE 296
	1280x720P 50.00 Hz			
	1280x720P 29.97/30.00 Hz			
	1280x720P 25.00 Hz			
	1280x720P 23.98/24.00 Hz			
	1920x1080i 59.94/60.00 Hz			SMPTE 292-1 SMPTE 274M
	1920x1080i 50.00 Hz			
	1920x1080P 29.97/30.00 Hz			
	1920x1080PsF 29.97/30.00 Hz			
	1920x1080P 25.00 Hz			
	1920x1080PsF 25.00 Hz			
	1920x1080P 23.98/24.00 Hz			
	1920x1080PsF 23.98/24.00 Hz			
	2048x1080P 29.97/30.00 Hz			SMPTE 292-1 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
	2048x1080PsF 29.97/30.00 Hz			
	2048x1080P 25.00 Hz			
	2048x1080PsF 25.00 Hz			
	2048x1080P 23.98/24.00 Hz			
	2048x1080PsF 23.98/24.00 Hz			
3G-SDI (Level A)	1280x720P 59.94/60.00 Hz	4:4:4 RGB 4:4:4 YCbCr	10-bit	SMPTE 425-1 SMPTE 296
	1280x720P 50.00 Hz	4:4:4 RGB 4:4:4 YCbCr	10-bit	
	1280x720P 29.97/30.00 Hz	4:4:4 RGB 4:4:4 YCbCr	10-bit	
	1280x720P 25.00 Hz	4:4:4 RGB 4:4:4 YCbCr	10-bit	
	1280x720P 23.98/24.00 Hz	4:4:4 RGB 4:4:4 YCbCr	10-bit	
	1920x1080P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 274M

Transmission method	Signal format	Color format	Color depth	Standards
3G-SDI (Level A)	1920x1080i 59.94/60.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 274M
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080P 50.00 Hz	4:2:2 YCbCr	10-bit	
	1920x1080i 50.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080P 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 274M
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080PsF 29.97/30.00 Hz	4:4:4 RGB	10-bit	
			12-bit	
		4:4:4 YCbCr	12-bit	
		4:4:4 YCbCr	10-bit	
		4:2:2 YCbCr	12-bit	
	1920x1080P 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 274M
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080PsF 25.00 Hz	4:4:4 RGB	10-bit	
			12-bit	
		4:4:4 YCbCr	12-bit	
		4:4:4 YCbCr	10-bit	
		4:2:2 YCbCr	12-bit	
	1920x1080P 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 274M
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080PsF 23.98/24.00 Hz	4:4:4 RGB	10-bit	
			12-bit	
		4:4:4 YCbCr	12-bit	
		4:4:4 YCbCr	10-bit	
		4:2:2 YCbCr	12-bit	
	2048x1080P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
	2048x1080P 50.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 2048-2

Transmission method	Signal format	Color format	Color depth	Standards
3G-SDI (Level A)	2048x1080P 47.95/48.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 2048-2
	2048x1080P 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 428-9
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080PsF 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 428-9
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080P 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 428-9
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080PsF 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 428-9
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080P 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 428-9
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080PsF 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 428-9
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2

Transmission method	Signal format	Color format	Color depth	Standards
3G-SDI (Level B)	1920x1080P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 372 SMPTE 274M
	1920x1080i 59.94/60.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080P 50.00 Hz	4:2:2 YCbCr	10-bit	
	1920x1080i 50.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080P 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080PsF 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080P 25.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080PsF 25.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080P 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	1920x1080PsF 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	2048x1080P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 372 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
	2048x1080P 50.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 372 SMPTE 2048-2
	2048x1080P 47.95/48.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 372 SMPTE 2048-2

Transmission method	Signal format	Color format	Color depth	Standards
3G-SDI (Level B)	2048x1080P 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080PsF 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080P 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080PsF 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	2048x1080P 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2

Supported Signal Format

Transmission method	Signal format	Color format	Color depth	Standards
3G-SDI (Level B)	2048x1080PsF 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1
		4:4:4 X'Y'Z'	12-bit	SMPTE 372 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 372 SMPTE 2048-2
Dual Link 3G-SDI 2 Sample Interleave (Level B)	3840x2160P 29.97/30.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-3 SMPTE 372 SMPTE 274M
	3840x2160P 25.00 Hz			
	3840x2160P 23.98/24.00 Hz			
	4096x2160P 29.97/30.00 Hz			SMPTE 425-3 SMPTE 372 SMPTE 2048-2
	4096x2160P 25.00 Hz			
	4096x2160P 23.98/24.00 Hz			
Quad Link HD-SDI	3840x2160i 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 292-1 SMPTE 274M
	3840x2160i 50.00 Hz			
	3840x2160P 29.97/30.00 Hz			
	3840x2160PsF 29.97/30.00 Hz			
	3840x2160P 25.00 Hz			
	3840x2160PsF 25.00 Hz			
	3840x2160P 23.98/24.00 Hz			
	3840x2160PsF 23.98/24.00 Hz			
	4096x2160P 29.97/30.00 Hz			SMPTE 292-1 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
	4096x2160PsF 29.97/30.00 Hz			
	4096x2160P 25.00 Hz			
	4096x2160PsF 25.00 Hz			
	4096x2160P 23.98/24.00 Hz			
	4096x2160PsF 23.98/24.00 Hz			

Transmission method	Signal format	Color format	Color depth	Standards	
Quad Link 3G-SDI (Level A)	3840x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 274M	
	3840x2160i 59.94/60.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit		
		4:2:2 YCbCr	12-bit		
	3840x2160P 50.00 Hz	4:2:2 YCbCr	12-bit		
	3840x2160i 50.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit		
		4:2:2 YCbCr	12-bit		
	3840x2160P 29.97/30.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit		
		4:2:2 YCbCr	12-bit		
	3840x2160PsF 29.97/30.00 Hz	4:4:4 RGB	10-bit		
			12-bit		
			4:4:4 YCbCr	12-bit	
			4:4:4 YCbCr	10-bit	SMPTE 425-1 SMPTE 274M
	4:2:2 YCbCr	12-bit			
	3840x2160P 25.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit		
		4:2:2 YCbCr	12-bit		
	3840x2160PsF 25.00 Hz	4:4:4 RGB	10-bit		
			12-bit		
			4:4:4 YCbCr	12-bit	
			4:4:4 YCbCr	10-bit	SMPTE 425-1 SMPTE 274M
	4:2:2 YCbCr	12-bit			
	3840x2160P 23.98/24.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit		
		4:2:2 YCbCr	12-bit		
	3840x2160PsF 23.98/24.00 Hz	4:4:4 RGB	10-bit		
			12-bit		
			4:4:4 YCbCr	12-bit	
			4:4:4 YCbCr	10-bit	SMPTE 425-1 SMPTE 274M
			4:2:2 YCbCr	12-bit	
	4096x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2	

Transmission method	Signal format	Color format	Color depth	Standards
Quad Link 3G-SDI (Level A)	4096x2160P 50.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 2048-2
	4096x2160P 47.95/48.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 2048-2
	4096x2160P 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160PsF 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160P 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160PsF 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160P 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160PsF 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1
		4:2:2 YCbCr	12-bit	SMPTE 2048-2

Transmission method	Signal format	Color format	Color depth	Standards
Quad Link 3G-SDI 2 Sample Interleave (Level A)	3840x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-5 SMPTE 274M
	3840x2160P 50.00 Hz	4:2:2 YCbCr	10-bit	
	3840x2160P 29.97/30.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:2:2 YCbCr	12-bit	
	3840x2160P 25.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:2:2 YCbCr	12-bit	
	3840x2160P 23.98/24.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-5 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:2:2 YCbCr	12-bit	
	4096x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	
	4096x2160P 50.00 Hz	4:2:2 YCbCr	10-bit	
	4096x2160P 47.95/48.00 Hz	4:2:2 YCbCr	10-bit	
	4096x2160P 29.97/30.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:4:4 X'Y'Z' 4:2:2 YCbCr	12-bit	
	4096x2160P 25.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:4:4 X'Y'Z' 4:2:2 YCbCr	12-bit	
	4096x2160P 23.98/24.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:4:4 X'Y'Z' 4:2:2 YCbCr	12-bit	
Quad Link 3G-SDI (Level B)	3840x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 372 SMPTE 274M
	3840x2160i 59.94/60.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:2:2 YCbCr	12-bit	
	3840x2160P 50.00 Hz	4:2:2 YCbCr	10-bit	

Transmission method	Signal format	Color format	Color depth	Standards
Quad Link 3G-SDI (Level B)	3840x2160i 50.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372 SMPTE 274M
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	3840x2160P 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	3840x2160PsF 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	3840x2160P 25.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	3840x2160PsF 25.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	3840x2160P 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	3840x2160PsF 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	
		4:4:4 YCbCr		
		4:2:2 YCbCr	12-bit	
	4096x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 372 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
	4096x2160P 50.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 372 SMPTE 2048-2
	4096x2160P 47.95/48.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-1 SMPTE 372 SMPTE 2048-2

Transmission method	Signal format	Color format	Color depth	Standards
Quad Link 3G-SDI (Level B)	4096x2160P 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160PsF 29.97/30.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160P 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160PsF 25.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2
	4096x2160P 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:4:4 X'Y'Z'	12-bit	SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372
		4:2:2 YCbCr	12-bit	SMPTE 2048-2

Transmission method	Signal format	Color format	Color depth	Standards
Quad Link 3G-SDI (Level B)	4096x2160PsF 23.98/24.00 Hz	4:4:4 RGB	12-bit/10-bit	SMPTE 425-1 SMPTE 372 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:4:4 X'Y'Z'	12-bit	
		4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-1 SMPTE 372 SMPTE 2048-2
		4:2:2 YCbCr	12-bit	
Quad Link 3G-SDI 2 Sample Interleave (Level B)	3840x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 425-5 SMPTE 372 SMPTE 274M
	3840x2160P 50.00 Hz	4:2:2 YCbCr	10-bit	
	3840x2160P 29.97/30.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:2:2 YCbCr	12-bit	
	3840x2160P 25.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:2:2 YCbCr	12-bit	
	3840x2160P 23.98/24.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	SMPTE 425-5 SMPTE 372 SMPTE 428-9 SMPTE 428-19 SMPTE 2048-2
		4:2:2 YCbCr	12-bit	
	4096x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	
	4096x2160P 50.00 Hz	4:2:2 YCbCr	10-bit	
	4096x2160P 47.95/48.00 Hz	4:2:2 YCbCr	10-bit	
	4096x2160P 29.97/30.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:4:4 X'Y'Z' 4:2:2 YCbCr	12-bit	
	4096x2160P 25.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:4:4 X'Y'Z' 4:2:2 YCbCr	12-bit	
	4096x2160P 23.98/24.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:4:4 X'Y'Z' 4:2:2 YCbCr	12-bit	
6G-SDI	3840x2160P 29.97/30.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 2081-10
	3840x2160P 25.00 Hz			
	3840x2160P 23.98/24.00 Hz			
	4096x2160P 25.00 Hz			
	4096x2160P 23.98/24.00 Hz			

Transmission method	Signal format	Color format	Color depth	Standards
Dual Link 6G-SDI 2 Sample Interleave	3840x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	SMPTE 2081-11
	3840x2160P 50.00 Hz			
12G-SDI	3840x2160P 29.97/30.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	SMPTE 2082-10
		4:2:2 YCbCr	12-bit	
	3840x2160P 25.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:2:2 YCbCr	12-bit	
	3840x2160P 23.98/24.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:2:2 YCbCr	12-bit	
	4096x2160P 25.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:4:4 X'Y'Z' 4:2:2 YCbCr	12-bit	
	4096x2160P 23.98/24.00 Hz	4:4:4 RGB 4:4:4 YCbCr	12-bit/10-bit	
		4:4:4 X'Y'Z' 4:2:2 YCbCr	12-bit	
	3840x2160P 59.94/60.00 Hz	4:2:2 YCbCr	10-bit	
	3840x2160P 50.00 Hz			
	4096x2160P 47.95/48.00 Hz			
	4096x2160P 59.94/60.00 Hz			
	4096x2160P 50.00 Hz			

HDMI

Signal format	Color format/Color depth
640x480P 59.94/60.00 Hz	4:4:4 RGB 8-bit
800x600P 60.00 Hz	
1024x768P 60.00 Hz	
720x480P 59.94/60.00 Hz	4:4:4 RGB 12-bit/10-bit/8-bit 4:4:4 YCbCr 12-bit/10-bit/8-bit 4:2:2 YCbCr 12-bit
720x576P 50.00 Hz	
1280x720P 59.94/60.00 Hz	
1280x720P 50.00 Hz	
1920x1080P 59.94/60.00 Hz	
1920x1080i 59.94/60.00 Hz	
1920x1080P 50.00 Hz	
1920x1080i 50.00 Hz	
1920x1080P 29.97/30.00 Hz	
1920x1080P 25.00 Hz	
1920x1080P 23.98/24.00 Hz	
2048x1080P 59.94/60.00 Hz	
2048x1080P 50.00 Hz	
2048x1080P 29.97/30.00 Hz	
2048x1080P 25.00 Hz	
2048x1080P 23.98/24.00 Hz	
3840x2160P 59.94/60.00 Hz	4:4:4 RGB 8-bit 4:4:4 YCbCr 8-bit 4:2:2 YCbCr 12-bit 4:2:0 YCbCr 12-bit/10-bit/8-bit
3840x2160P 50.00 Hz	
3840x2160P 29.97/30.00 Hz	4:4:4 RGB 12-bit/10-bit/8-bit 4:4:4 YCbCr 12-bit/10-bit/8-bit 4:2:2 YCbCr 12-bit
3840x2160P 25.00 Hz	
3840x2160P 23.98/24.00 Hz	
4096x2160P 59.94/60.00 Hz	4:4:4 RGB 8-bit 4:4:4 YCbCr 8-bit 4:2:2 YCbCr 12-bit 4:2:0 YCbCr 12-bit/10-bit/8-bit
4096x2160P 50.00 Hz	
4096x2160P 29.97/30.00 Hz	
4096x2160P 25.00 Hz	4:4:4 RGB 12-bit/10-bit/8-bit 4:4:4 YCbCr 12-bit/10-bit/8-bit 4:2:2 YCbCr 12-bit
4096x2160P 23.98/24.00 Hz	

Image/Frame Display

SDI

83

Signal system			Display Method	
1280x720	23.98/24.00	P	47.96/48.00	P*
	25.00	P	50.00	P*
	29.97/30.00	P	59.94/60.00	P*
	50.00	P	50.00	P
	59.94/60.00	P	59.94/60.00	P
1920x1080	50.00	i	50.00	P
	59.94/60.00	i	59.94/60.00	P
	23.98/24.00	PsF	47.96/48.00	P*
	25.00	PsF	50.00	P*
	29.97/30.00	PsF	59.94/60.00	P*
	23.98/24.00	P	47.96/48.00	P*
	25.00	P	50.00	P*
	29.97/30.00	P	59.94/60.00	P*
	50.00	P	50.00	P
	59.94/60.00	P	59.94/60.00	P
2048x1080	23.98/24.00	PsF	47.96/48.00	P*
	25.00	PsF	50.00	P*
	29.97/30.00	PsF	59.94/60.00	P*
	23.98/24.00	P	47.96/48.00	P*
	25.00	P	50.00	P*
	29.97/30.00	P	59.94/60.00	P*
	47.95/48.00	P	47.95/48.00	P
	50.00	P	50.00	P
	59.94/60.00	P	59.94/60.00	P

Signal system			Display Method	
3840x2160	50.00	i	50.00	P
	59.94/60.00	i	59.94/60.00	P
	23.98/24.00	PsF	47.96/48.00	P*
	25.00	PsF	50.00	P*
	29.97/30.00	PsF	59.94/60.00	P*
	23.98/24.00	P	47.96/48.00	P*
	25.00	P	50.00	P*
	29.97/30.00	P	59.94/60.00	P*
	50.00	P	50.00	P
	59.94/60.00	P	59.94/60.00	P
4096x2160	23.98/24.00	PsF	47.96/48.00	P*
	25.00	PsF	50.00	P*
	29.97/30.00	PsF	59.94/60.00	P*
	23.98/24.00	P	47.96/48.00	P*
	25.00	P	50.00	P*
	29.97/30.00	P	59.94/60.00	P*
	47.95/48.00	P	47.95/48.00	P
	50.00	P	50.00	P
	59.94/60.00	P	59.94/60.00	P

* Displaying same frame

HDMI

Signal system			Display Method	
640x480	59.94/60.00	P	59.94/60.00	P
800x600	60.00	P	60.00	P
720x480	59.94/60.00	P	59.94/60.00	P
720x576	50.00	P	50.00	P
1024x768	60.00	P	60.00	P
1280x720	59.94/60.00	P	59.94/60.00	P
1280x720	50.00	P	50.00	P
1920x1080	59.94/60.00	P	59.94/60.00	P
1920x1080	59.94/60.00	i	59.94/60.00	P
1920x1080	50.00	P	50.00	P
1920x1080	50.00	i	50.00	P
1920x1080	29.97/30.00	P	59.94/60.00	P*
1920x1080	25.00	P	50.00	P*
1920x1080	23.98/24.00	P	47.96/48.00	P*
2048x1080	59.94/60.00	P	59.94/60.00	P
2048x1080	50.00	P	50.00	P
2048x1080	29.97/30.00	P	59.94/60.00	P*
2048x1080	25.00	P	50.00	P*
2048x1080	23.98/24.00	P	47.96/48.00	P*
3840x2160	59.94/60.00	P	59.94/60.00	P
3840x2160	50.00	P	50.00	P
3840x2160	29.97/30.00	P	59.94/60.00	P*
3840x2160	25.00	P	50.00	P*
3840x2160	23.98/24.00	P	47.96/48.00	P*
4096x2160	59.94/60.00	P	59.94/60.00	P
4096x2160	50.00	P	50.00	P
4096x2160	29.97/30.00	P	59.94/60.00	P*
4096x2160	25.00	P	50.00	P*
4096x2160	23.98/24.00	P	47.96/48.00	P*

* Displaying same frame

Error Messages

86

	Message	Description and Action
Network	Communication error.	IP address may be in conflict or there may be a network communication error. Check the network environment.
	Invalid IP Address.	Enter the correct IP address.
	Invalid Subnet Mask.	Enter the correct subnet mask.
Various settings, CDL export	The USB memory is full.	Use another USB memory or delete the content of the memory.
	Failed to write file.	The USB memory may be defective or protected. Check the USB memory.
LUT, Various settings, CDL import	(LUT Import) "LUT Type" is different. (CDL Import) "File Type" is different.	Select the correct file format.
	Failed to read file.	The USB memory may be defective or protected. Check the USB memory.
	Failed to import.	There is an error in the file to be imported. Check the file.
	No import file.	Check and ensure that the file has been saved to the USB memory or imported to [User 1] to [User 3].
Screen Capture	Failed to capture.	The USB memory may be defective or protected. Check the USB memory.
	Invalid Signal.	A screen displaying no video is being captured for example there is no signal or an unsupported signal is being input. Check the signal, input it again, and capture it.
	Copy protected signal.	The signal you tried to capture may be protected by HDCP 2.2 which is a copy prevention standard for HDMI. In this case, the signal cannot be captured. Check the HDMI signal.
	Failed to playback file.	The USB memory or the file may be defective or protected. Check the USB memory or the file.
	No capture file.	Check and ensure that the file has been saved to the USB memory.

Message		Description and Action
Hardware error	Backlight error.	Disconnect the power cord, reconnect it, and then turn on the power. If the message persists, contact Canon Customer Center.
	Panel error.	
	I/F error.	
	Audio I/F error.	
	System error.	
Input signal	No Signal	Displayed when there is no video signal input.
	Unsupported	Unsupported video signal is input. Check the supported signal format (69).
Operation	Invalid operation.	Operation is disabled. Check the setting items.
	"Protect Settings" is on.	To use the OSD menu, move the selection frame to [Protect] and press the jog dial for approximately 3 seconds.
	"CDL/User LUT Bypass" is on.	When [CDL/User LUT]  [Bypass] is turned [On], you cannot adjust [Power], [Saturation], [Offset], or [Slope].
	Invalid Password.	Enter the correct password.
	No license.	This function cannot be used as the license file has not been applied. Refer to the Canon website for detailed information.
USB memory	USB memory is not connected.	Correctly connect the USB memory to the USB port of this main unit.
	Unsupported USB memory.	Check the USB memory format and make sure it is not protected.
Firmware Update	No update file.	Firmware update files are not saved on USB memory or other media.
	Failed to read update file.	There is an error in the file. Check the file.
	The firmware/license has been already updated.	This is the file that is updated on the video display.

Error Messages

Message		Description and Action
DC power supply	Low Voltage.	The battery charge level drops if using the battery. If you use another power source, check the input voltage of the DC power supply.
	Low Voltage, Turn off power.	The power has shut off as DC power voltage became insufficient for continued operation. There may not be enough energy left if you are using the battery. Connect a charged battery and turn the video display power on. If you use another power source, check the input voltage of the DC power supply.
	Invalid Voltage, Turn off power.	The power has shut off as the DC power input voltage exceeded the operational threshold. Check the input voltage of the DC power supply.
Power Saving	No Signal, Turn off power by Power Save function.	This indicates that there have not been any signals for the time set to [Power Save]. The power will be turned off approximately 5 minutes later. Check the input signal.
	No Signal, Turn off power.	This indicates that the power is turned off after approximately 5 minutes as there has been no signal. Check the input signal.

Troubleshooting

Symptom	Cause and Action	
Power does not turn on. (Power indicator does not turn on.)	- Press the  button. - Check that the power cord is connected correctly. - Brightness of the power indicator may be turned off. Turn it on and check once more.	— 63
The screen is dark.	When the power indicator does not turn on: - Press the  button. - Check that the power cord is connected correctly.	—
	When the power indicator is lit orange: Press the  button.	—
	When the power indicator is flashing orange: - Flashing once every 3 seconds : Contact Canon Customer Center. - Flashing twice every 3 seconds : - Turn on the power with the  button. - The temperature of the display rises (or falls) depend on operation environment. Check the environmental conditions and do not use in direct sunlight. - If the power still does not turn on, contact Canon Customer Center.	—
The power was turned off when there were not any signals.	When [Power Save] is set to other than [Off], the video display's power is automatically turned off if the no video signal is input for a certain period of time. Turn on the power again.	
The power suddenly goes off when a DC power supply is used.	Depending on the model of DC power supply used, the output voltage may decrease suddenly and even turn off (0 V output) when a threshold value is reached. Before that, a warning message about low input voltage may be displayed only briefly or not at all. Connect a charged DC power supply or AC power supply.	—
The image does not display.	Set each item in [Channel Settings] according to input signal.	34
There is a blank area when set to Quad Input/Dual Input.	There may be no input signal. Check the signal.	34
	Some combinations are not supported. Check the signal.	68
Screen is too bright/dark.	- Adjust the [Luminance] on the OSD menu. - There is a limit on the service life of LCD backlight. If the screen becomes dark or starts flickering, contact Canon Customer Center.	19

Symptom	Cause and Action	
Burn-in image appears.	- This is a characteristic of the LCD panel and you should avoid displaying stationary image for a long time. - When burn-in image appears with the interlaced signal displayed, try changing setting to: [Channel Settings] ➤ [I/P Conversion] ➤ [Normal].	— 38
There is an unlit or red, blue, green, or white dot on screen.	LCD display is made of very high precision technology. It has effective pixels of 99.99% or more, but there may be black dots or red, blue, or green dots that may be always on. This is not a failure.	—
There is an interference pattern or trace that remains when the LCD panel is pressed.	The symptom may be resolved by displaying a white or black image on the entire screen.	—
OSD menu cannot be used.	Check that [Protect Settings] is not set.	62
[Aspect Marker], [Safety Zone Marker] or [Area Marker] does not appear.	A channel with no signal, unsupported signal, or with [Input Configuration] not set may be selected. Check the signal.	68
You forgot the password for [Protect Settings].	Press the jog dial and the  button while the video display is in standby. The configuration will be reset to the state where no password is set.	—
The video display does not start up in the condition that the power was turned off last time.	Check the [Power on Setting] on the OSD menu. Set [Last memory] to start up the video display in the condition that the power is turned off last time.	64
The image quality for the User mode in [Picture Mode] differs from the image quality of presets.	Select the preset mode by [Copy Picture Mode] and copy the settings.	28
Image quality is automatically changed.	Check the [Channel Settings] ➤ [Picture Mode] settings.	8 36
The same image is displayed in two screens.	Check the [Channel Settings] ➤ [Single Input Dual View] settings.	36

Software Used in This Product

Software installed with this product includes software modules from Canon or third parties.

Software Developed by Canon and Free Software

Software developed or created by Canon and accompanying document is protected by copyright law, terms of an international convention and any other governing laws.

This product uses software modules under copyright by third parties and distributed as free software. Some of these software modules are subject to the GNU General Public License v2 (GPL), GNU Lesser General Public License v2.1 (LGPL) or any other license.

Free software modules installed with this product

- | | | | |
|--------------------------|------------------------|--------------------|-----------------|
| • libupnp | • libxml2 | • libpng | • lz4 |
| • zlib | • FreeRTOS | • u-boot-xlnx | • attr |
| • avahi | • base-files | • base-passwd | • bridge-utils |
| • busybox | • eudev | • exfat-utils | • fuse |
| • fuse-exfat | • gcc-runtime | • glibc | • init-ifupdown |
| • initscripts | • kernel-module-vcu | • kmod | • libdaemon |
| • libgcc | • libomxil-xlnx | • libpam | • libxcrypt |
| • linux-xlnx | • modutils-initscripts | • netbase | • opkg-utils |
| • packagegroup-core-boot | • shadow | • shadow-securetty | • sysvinit |
| • sysvinit-inittab | • udev-extraconf | • update-rc.d | • util-linux |
| • vcu-firmware | | | |

Acquiring Source Code for Free Software

Some free software requires the acquirement of the source code of modules in order to distribute the executable form of those software modules. For information on how to acquire the source code for free software such as these and confirming terms of the GPL, LGPL and other license agreements, please check with the distributor from whom the product was purchased.

License Agreement for this Product

Obligation to Present License Agreement

The copyright holders of software modules installed with this product require its license agreement to be displayed. This license agreement is as follows:

■libupnp License

Copyright (c) 2000-2003 Intel Corporation All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither name of Intel Corporation nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL INTEL OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

■libxml License

Copyright (C) 1998-2003 Daniel Veillard. All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE DANIEL VELLARD BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of Daniel Veillard shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from him.

■lz4

LZ4 Library

Copyright (c) 2011-2016, Yann Collet

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

■FreeRTOS

Copyright (C) 2017 Amazon.com, Inc. or its affiliates. All Rights Reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software. If you wish to use our Amazon FreeRTOS name, please do so in a fair use way that does not cause confusion.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

■packagegroup-core-boot, shadow-securetty, udev-extraconf

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE

■shadow

Copyright (c) The Regents of the University of California.
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of the University nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE REGENTS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE REGENTS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Index

Number

2 Sample Interleave	34
3D-LUT	25
200% (Screen Scaling)	37
2020 Constant Luminance	27
2020 Gamut Mapping	27
2020 Outside of Gamut View	57

A

ACESproxy	19
Adjustment	19
Adobe RGB	19
ALT mode	13
Anamorphic	37, 53
Anchor Adjustment	7, 28
Anchor Point	7
Area Marker	43
Aspect Marker	40
Audio Input	35
Audio Level Meter	47
AUDIO OUT terminal	39
Audio Settings	39
Automatic Adjustment (CINEMA EOS / ARRI / VARICAM)	52

B

Backlight Control	20
Banner	62
Bias R/G/B	6, 20
Blue Off	58
Blue Only	58
Brightness	19
Button Name Lighting Time	63
Bypass (CDL/User LUT)	24, 26

C

Camera Information	53
Camera Link	52
Canon Log, CanonLog 2, Canon Log 3	21
CDL Export/CDL Import	11
CDL/User LUT	24
Center Marker	44
Channel	61

Channel Button	61
Channel Name	35
Channel Order	48
Channel Settings	34
Chroma	19
Chromaticity Diagram	50
CINEMA EOS SYSTEM (Picture Mode)	19
Color Gamut	20
Color Range	23
Color Range (User LUT)	25
Color Temperature	6, 20
Compare View	58
Copy Picture Mode	28
Custom (xy) (Color Temperature)	20

D

Date/Time	11, 61
DCI-P3	19
DC power supply	88
Detail Settings	
Adjustment	26
CDL/User LUT	25
Display Button LED	63
Display Name	62
Display Settings	37
Dual Input	34

E

Error Message	86
Export/Import	10, 64
Export (Signal Monitoring)	51

F

False Color	56
Firmware/License Update	64
Firmware/License Ver.	68
Format	35
Frame Hold	38
Function Button/Function Button (ALT)	61
Function Button Guide	62
Function Settings	47

G

Gain R/G/B.....	6, 20
Gamma/EOTF	21
GPI.....	17, 61
Green Off.....	58
Grid Marker	44

H

HDMI.....	82, 85
HDMI Link	28
HDR Range	22
Hide OSD	67
HLG System Gamma	27
Hybrid Log-Gamma.....	21

I

Image Division	34
Image/Frame Display.....	83
In Monitor Display	60
Input Configuration	34
Interlace	38
I/P Conversion.....	38
I/PsF.....	38
ITU-R BT.709.....	19
ITU-R BT.1886.....	21
ITU-R BT.2020.....	19

J

Jog dial	4
----------------	---

L

Language	61
LAN (Network/IMD Settings).....	18, 60
Link Order	35
Local Dimming	20
LTC	47
Luminance.....	19
LUT Import	9, 26
LUT Preset	10, 25

M

MAC Address	68
Marker Preset	40
Marker Settings	40

MENU button	4
Metadata.....	8
Monochrome	58
Multi View (Dual/Quad)	34

N

Native Input Resolution (Screen Scaling)	37
Network/IMD Settings	60

O

Offset	24
OSD Brightness.....	62
OSD Menu	4, 19
OSD Settings.....	62
Output Transform	23
Output Transform Surround	23
Over Range	57

P

Password	62
Peak brightness.....	19
Peaking	56
Picture Function Settings.....	56
Picture Mode.....	19, 36
Pixel Value Check	50
Power.....	24
Power Indicator Brightness.....	63
Power Indicator/Button LED Settings.....	63
Power on Setting	64
Power Save	63
PQ.....	21
Protect Settings.....	62
PsF.....	38

Q

Quad Input	34
------------------	----

R

Range Check	57
Red Off.....	58
Reset.....	28
Reset All Settings	64
RESET button.....	4

S

Safety Zone Marker	41
Saturation.....	24
Screen Capture	52
Screen Scaling	37
SDI	69, 83
Select Channel	34
Select Input Signal.....	34
Separator	36
Serial No.....	68
Signal Format	69
Signal Information.....	68
Signal Monitoring.....	51
Single Input	34
Single Input Dual View	36
S-Log2 / S-Log3	21
Slope.....	24
Speaker.....	39
Square Division.....	34
Subnet Mask	60
System Information.....	68
System Settings	61

T

Test Pattern	51
Time Code	47
Troubleshooting	89
TSL Protocol	18

U

Usage Time	68
User 1–9.....	19
User LUT	24
User LUT Preset Name	26

V

Vector Scope.....	50
Video Position (Multi View)	38
VITC	47
Volume	39

W

Wave Form Monitor	48
-------------------------	----

Y

YCbCr Color Matrix	27
--------------------------	----

Z

Zoom	7, 38
------------	-------



Canon Inc. 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501, Japan

Canon Europa N.V. Bovenkerkerweg 59, 1185 XB Amstelveen, The Netherlands <http://www.canon-europe.com>

USA <http://pro.usa.canon.com>

CANON U.S.A., INC.

<http://pro.usa.canon.com/support>

☎ (855) 4K-CANON (855-452-2666)
(USA only)

UNITED KINGDOM

Canon UK Ltd

Unit 160, Centennial Park, Centennial Avenue,
Elstree, Hertfordshire, WD6 3SG

☎ 020-7660-0186

The information in this document is verified as of September 2021. Subject to change without notice.
Visit your local Canon website to download the latest version.