Desview®

TP300

19"inch Professional Broadcast Teleprompter

User Manual



Efficient functional structure

With multiple adjustable structure, you can freely adjust the height and viewing angle to easily deal with different shooting situations

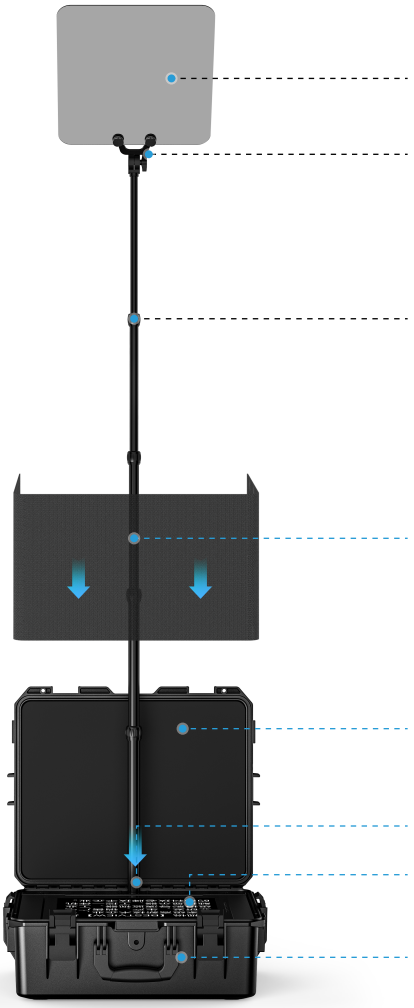

Two usage methods are available

The integrated hand-tightening screw design can be disassembled by hand in just a few steps without the use of tools, making it easy to carry around.

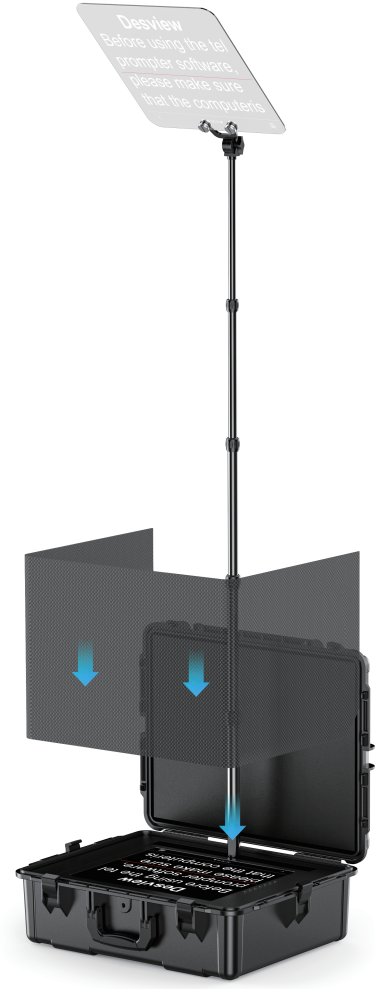

Way1

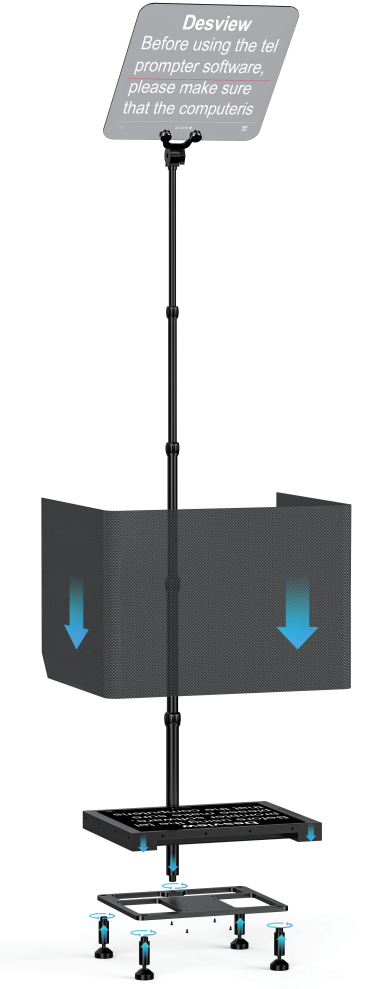

Method 2

Teleprompter software installation and use

1. Before using the teleprompter software, please make sure that the computer is connected to the teleprompter and displayed normally, in addition, you need to set the computer resolution of the multi-monitor for "expand these displays" mode.

Windows 8/10 setting method: Right click on the screen → Display Settings → Multi-Display settings → Extend these displays an application (OK).

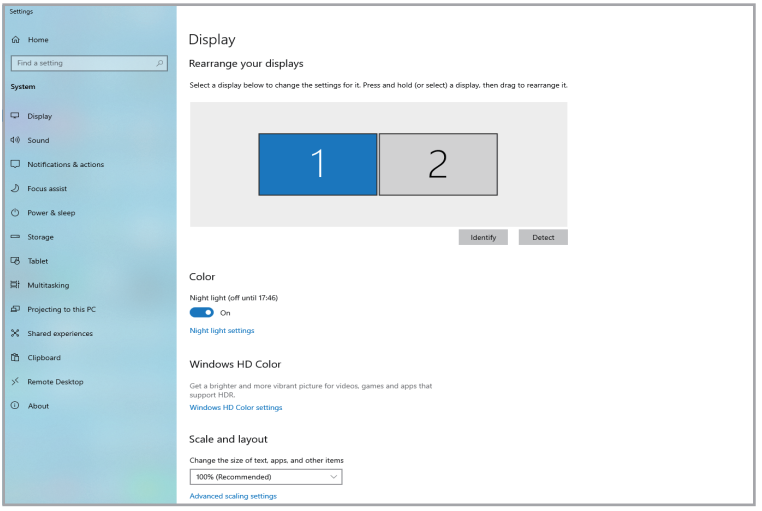

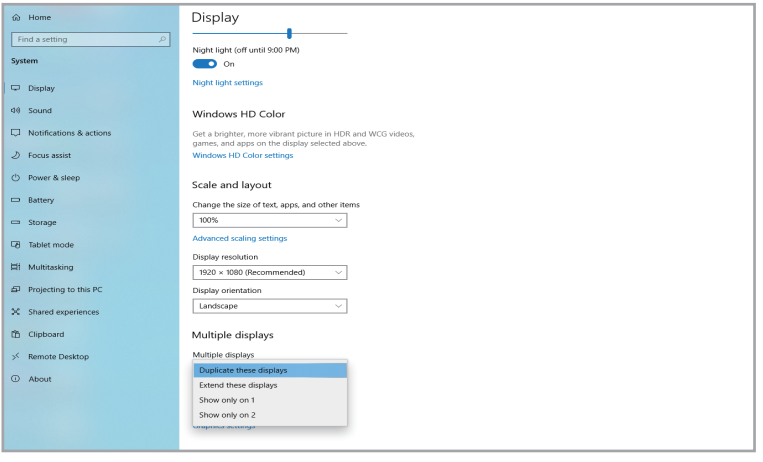

2. Plug the dongle, Bluetooth adapter, and foot switch into the computer's USB port







2.1. Turn on the Bluetooth device

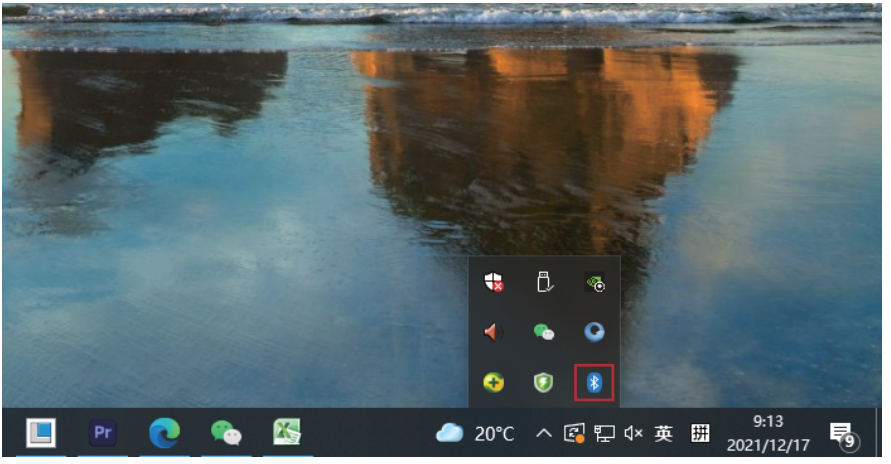

2.2. Add bluetooth device

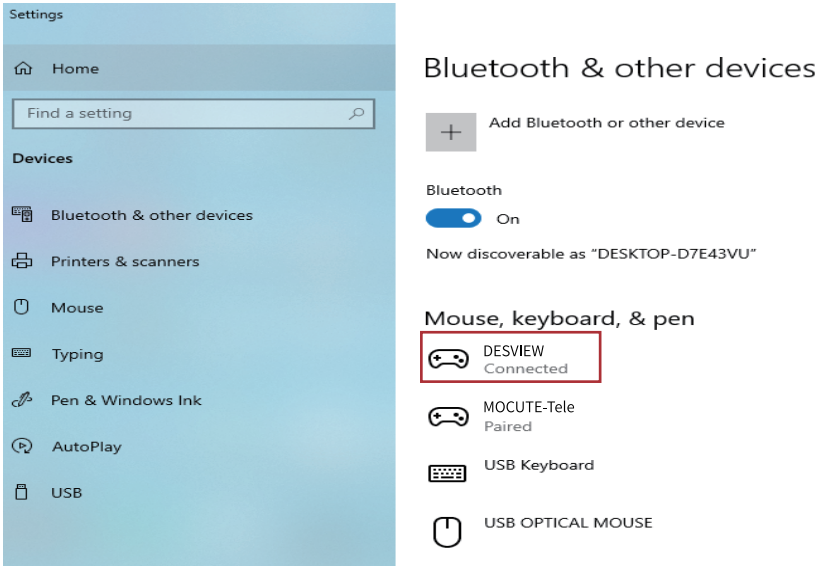

2.3. Connect to Bluetooth DESVIEW

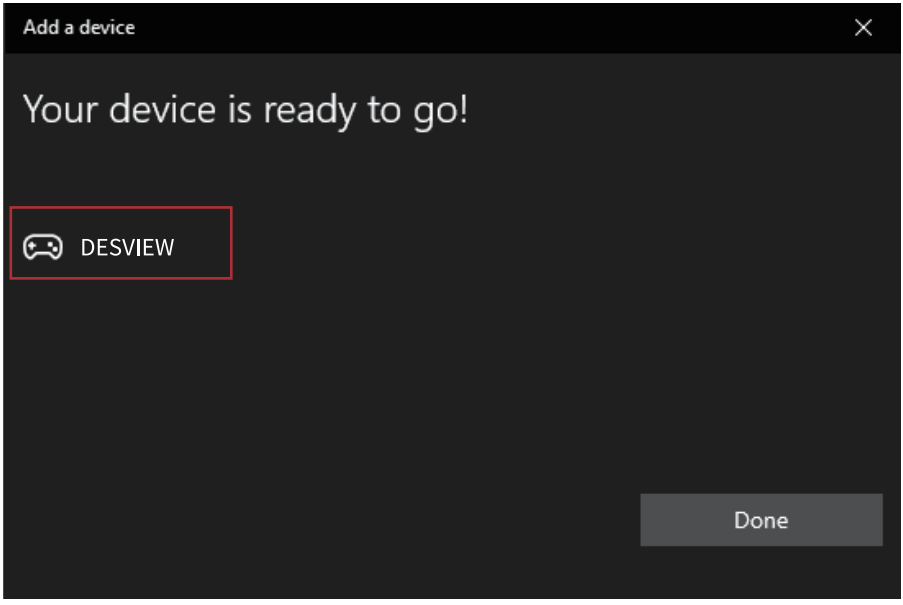

3. Open the software

名称	修改日期	类型	大小
System.Text.Encoding.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Text.Encoding.Extensions.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Text.RegularExpressions.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Threading.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Threading.Overlapped.dll	2021/11/16 10:48	应用程序扩展	37 KB
System.Threading.Tasks.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Threading.Tasks.Parallel.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Threading.Thread.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Threading.ThreadPool.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Threading.Timer.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.ValueTuple.dll	2018/5/15 13:29	应用程序扩展	78 KB
System.Xml.ReaderWriter.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Xml.XDocument.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Xml.XmlDocument.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Xml.XmlSerializer.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Xml.XPath.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Xml.XPath.XDocument.dll	2021/11/16 10:48	应用程序扩展	23 KB
Teleprompter.Core.dll	2021/11/30 17:01	应用程序扩展	25 KB
Teleprompter.Core.pdb	2021/11/30 17:01	PDB 文件	78 KB
Teleprompter	2021/12/10 14:22	应用程序	266 KB
Teleprompter.exe	2021/11/8 12:06	XML Configurati...	1 KB

4. Broadcast manuscript loading:load the pre-prepared broadcast manuscript, broadcast manuscript, it could be WORD, TXT, PDF formats while supporting the file being broadcasting to be saved.

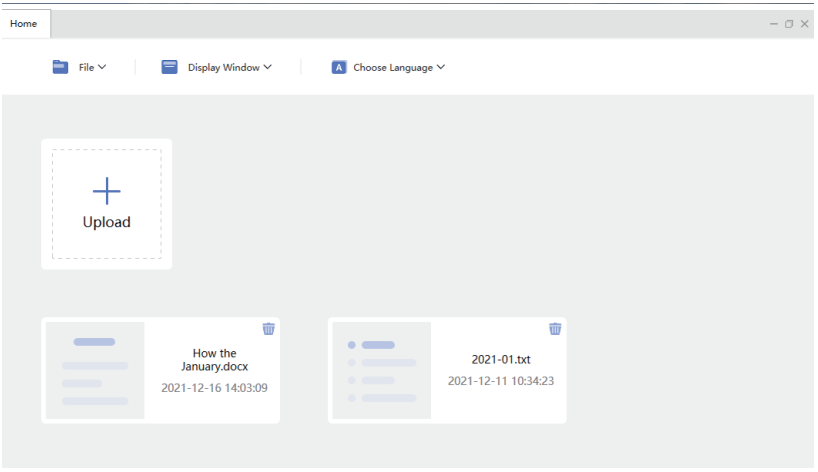

5. The picture below shows the software interface of the teleprompter successfully running.



6. (Mirror Primary Window) host window mirroring:when screen is reversed, it can back to normal position by this function.

(Reverse Primary Window) The host window is reversed: when the screen is projected on the teleprompter's splitter glass, it can be adjusted through this function to make the screen back to norma.

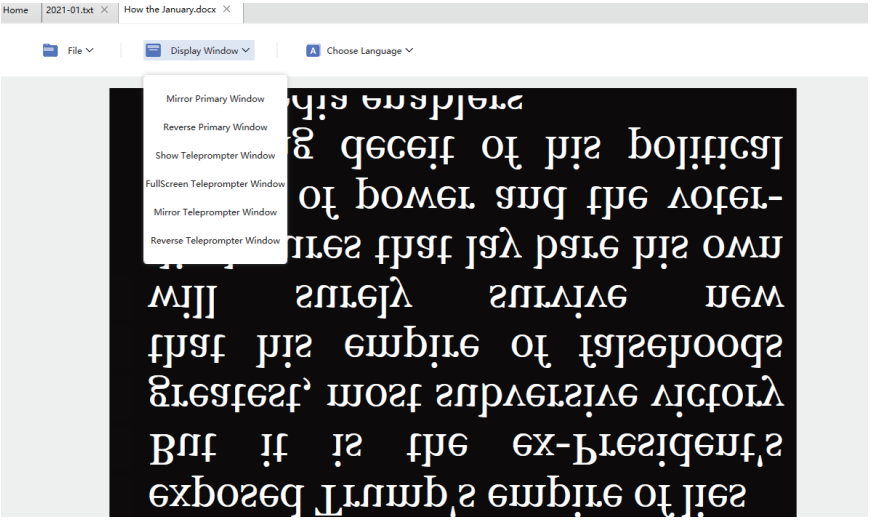

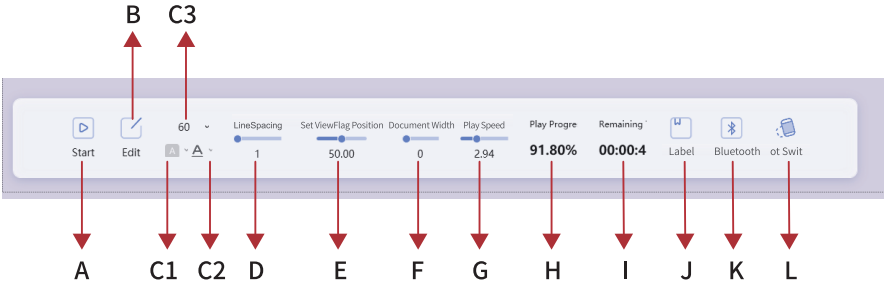

A: Pause/ Play

B: Online Editing: Click Online Editing, you can modify files with errors or unsuccessful words in the broadcast file in real time. After the modification is completed, click Apply.

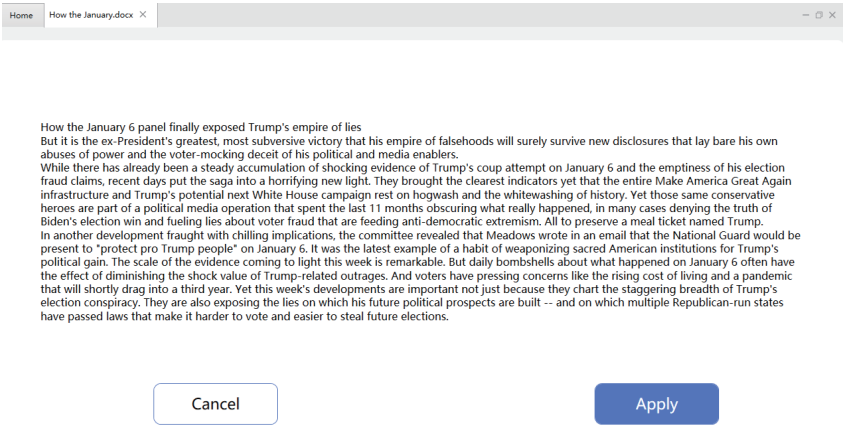

C1: background color editing

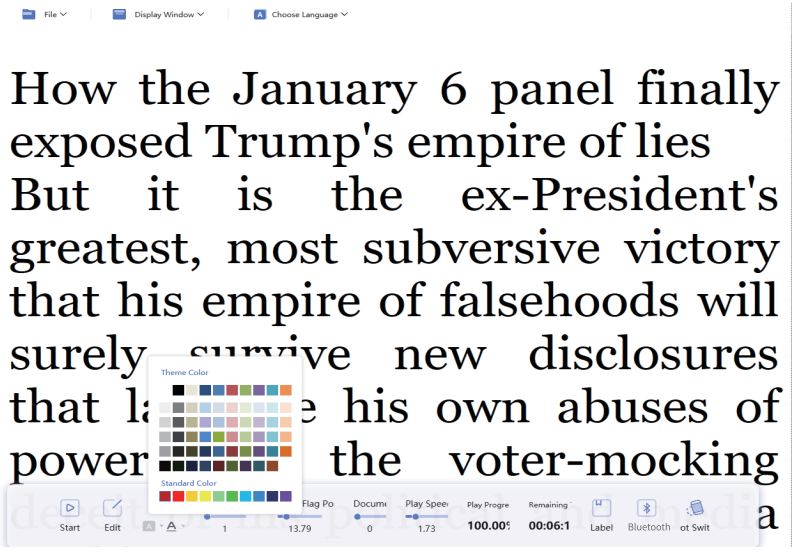

C2: Font color editing

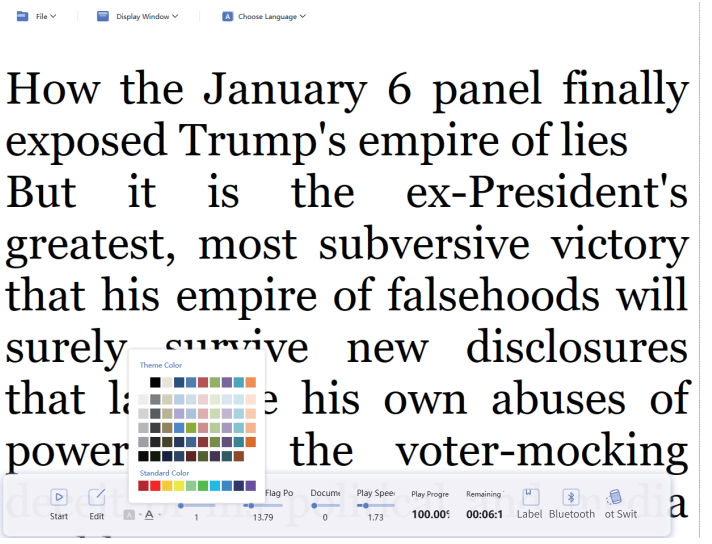

C3: Font size editing

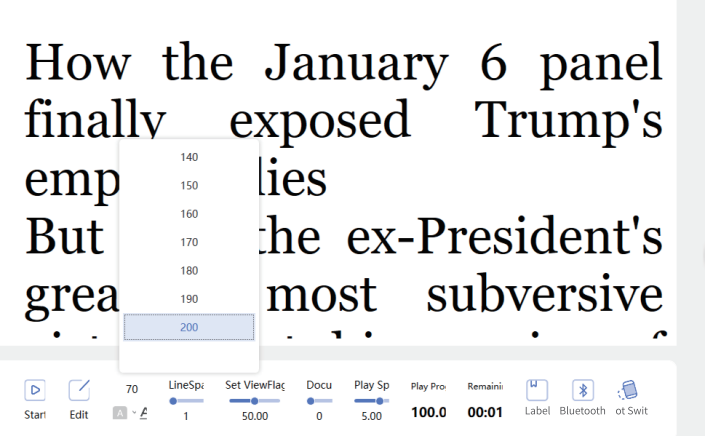

D:Line spacing: Set the font line spacing of the broadcast document in real time and the line spacing is based on the font size.

As shown on the left: font size: 170
2 times the line spacing

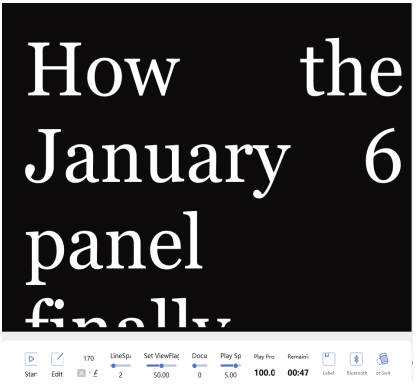

As shown on the right: font size: 60
2 times the line spacing

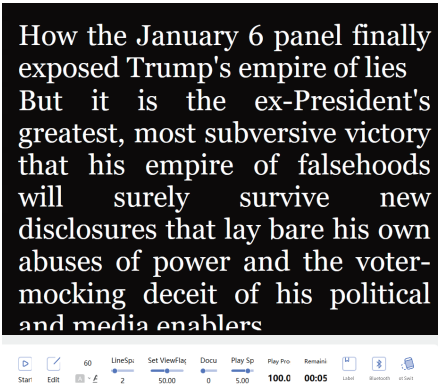

Note: In the case of the same line spacing, the larger the font, the fewer words are displayed. The font size and line spacing can be adjusted according to the eyesight of the announcer.

E: Sightline marker position

ViewFlag can be adjusted according to personal habits.

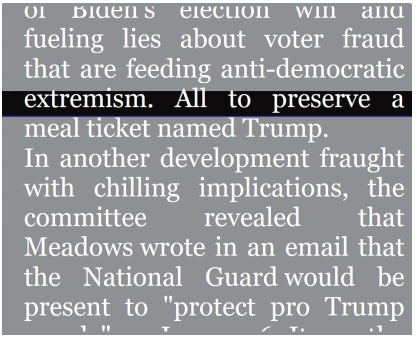

F: Document width

Schematic diagram of document width adjustment.



G: Play speed

Play Speed: The speed of the play document can be increased or decreased through the mouse or our wireless remote control, the mouse clicks the keyboard space foot switch, and the wireless remote control play pause button can set the playback document to pause.



H: Play progress



I: Remaining time



J: Label



K: Bluetooth connection



L: Foot switch connection



Bluetooth remote

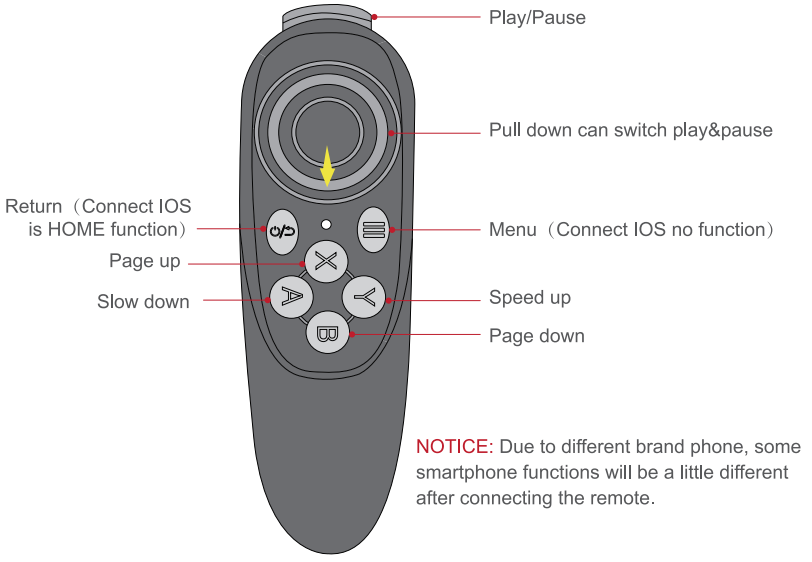

Remote use instruction

1.power on:Keep press ,until the lights on (about 2 seconds).
2.power off:Keep press ,until the lights off (about 5 seconds).

Notice:if power on without connecting anything,it will power off after 5 minutes;
if the phone connected ,it will power off after 30 minutes without any operation.

3. Connect: After power-on, LED light on, you're in connection mode. Please select DESVIEW to connect. After LED light off, it will memorize this device. Then it will connect automatically next time. For changing to a new device, press till 8 seconds, then the light flickers, connection mode activates again.





Frequently Asked Questions

All types of problems in the use of this teleprompter, you can pay attention to our Official website , real-time solution.

Step 1: Open Google and enter "www.desview.com" in the search box to quickl yenter the official website.
Step 2: Find the TP200 teleprompter page. At the bottom of the product landing pageyou can quickly obtain the solutions to common problems of the teleprompter.

Desview®

TP300

19寸专业播音提词器

软件使用说明书



高效功能结构

采用多重可调节结构，可自由调整高度及观看角度轻松应对不同拍摄场合

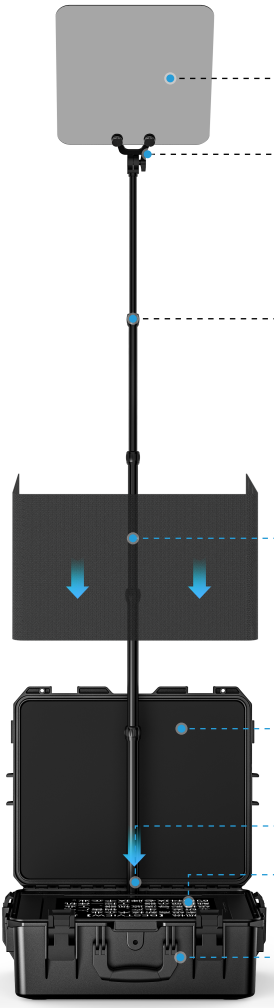

两种使用方式可供选择

一体化手拧螺丝设计，不用借助工具，简单几步，手工就可以完成拆卸，方便外出携带

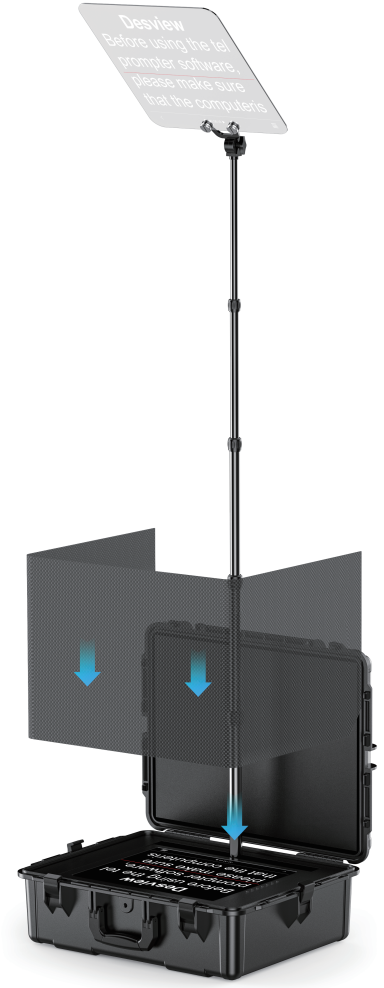

方式一

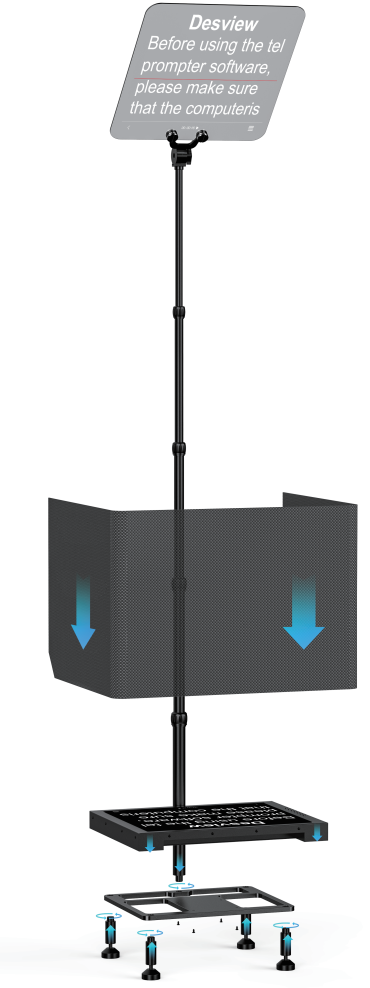

方式二

提词器软件安装及使用

1、在使用提词器软件前，请务必确定电脑与提词器连接并且正常显示，另外需要设置，电脑分辨率的多显示器为“复制这些显示器”模式。

Windows10设置方式:屏幕右键→显示设置→多显示器设置→复制这些显示器—应用（确定）





2、将加密狗、蓝牙适配器、脚踏开关插入到电脑USB接口







2.1、打开蓝牙设备：



2.2、添加蓝牙设备



2.3、连接蓝牙BESTVIEW

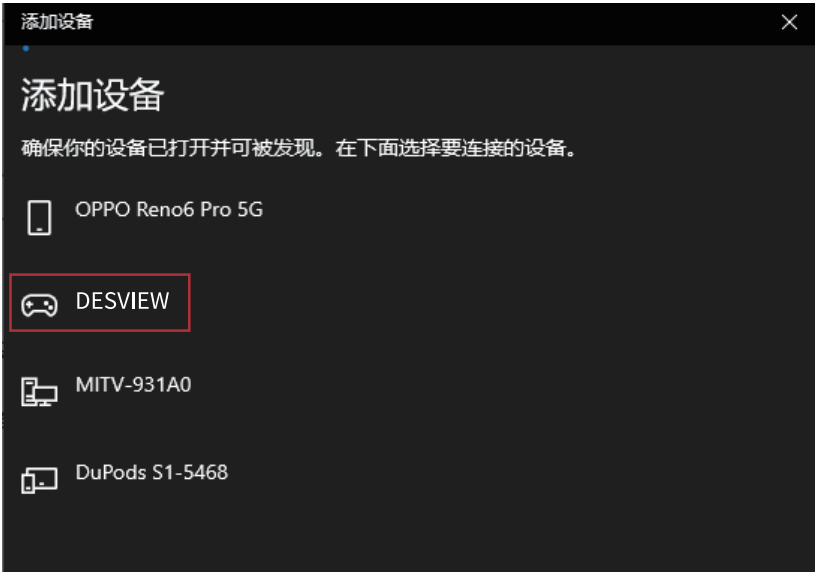

3、打开软件

名称	修改日期	类型	大小
System.Text.Encoding.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Text.Encoding.Extensions.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Text.RegularExpressions.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Threading.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Threading.Overlapped.dll	2021/11/16 10:48	应用程序扩展	37 KB
System.Threading.Tasks.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Threading.Tasks.Parallel.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Threading.Thread.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Threading.ThreadPool.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Threading.Timer.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.ValueTuple.dll	2018/5/15 13:29	应用程序扩展	78 KB
System.Xml.ReaderWriter.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Xml.XDocument.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Xml.XmlDocument.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Xml.XmlSerializer.dll	2021/11/16 10:48	应用程序扩展	22 KB
System.Xml.XPath.dll	2021/11/16 10:48	应用程序扩展	21 KB
System.Xml.XPath.XDocument.dll	2021/11/16 10:48	应用程序扩展	23 KB
Teleprompter.Core.dll	2021/11/30 17:01	应用程序扩展	25 KB
Teleprompter.Core.pdb	2021/11/30 17:01	PDB 文件	78 KB
Teleprompter	2021/12/10 14:22	应用程序	266 KB
Teleprompter.exe	2021/11/8 12:06	XML Configurati...	1 KB

4 .**播音文稿加载**:通过加载文件,加载事先准备好的播放文稿,播音文稿可以是WORD,TXT,PDF格式,同时支持正在播音的文件进行保存

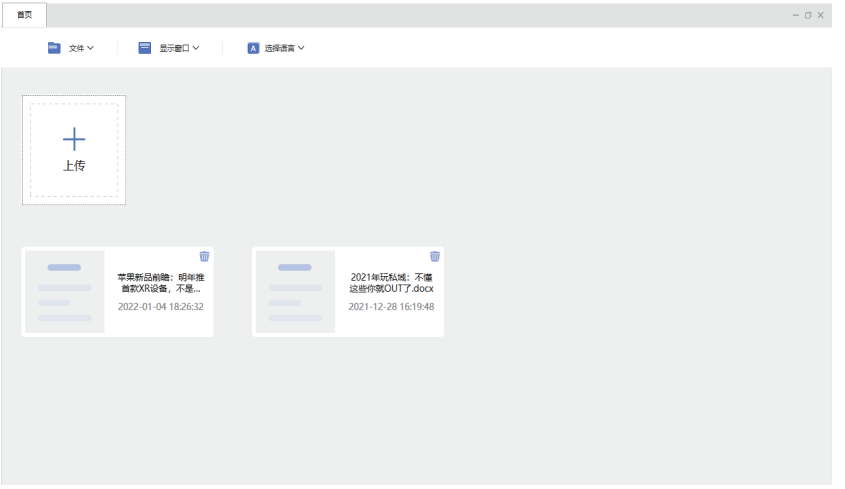

5、下图为成功运行的提词器软件界面。



6、主机窗口镜像：可调整显示器安装出现装反的情况，通过此功能可以把画面调整正常。

主机窗口反向：当画面投影到提词器分光玻璃上时为反向时可通过此功能装画面调整正常。

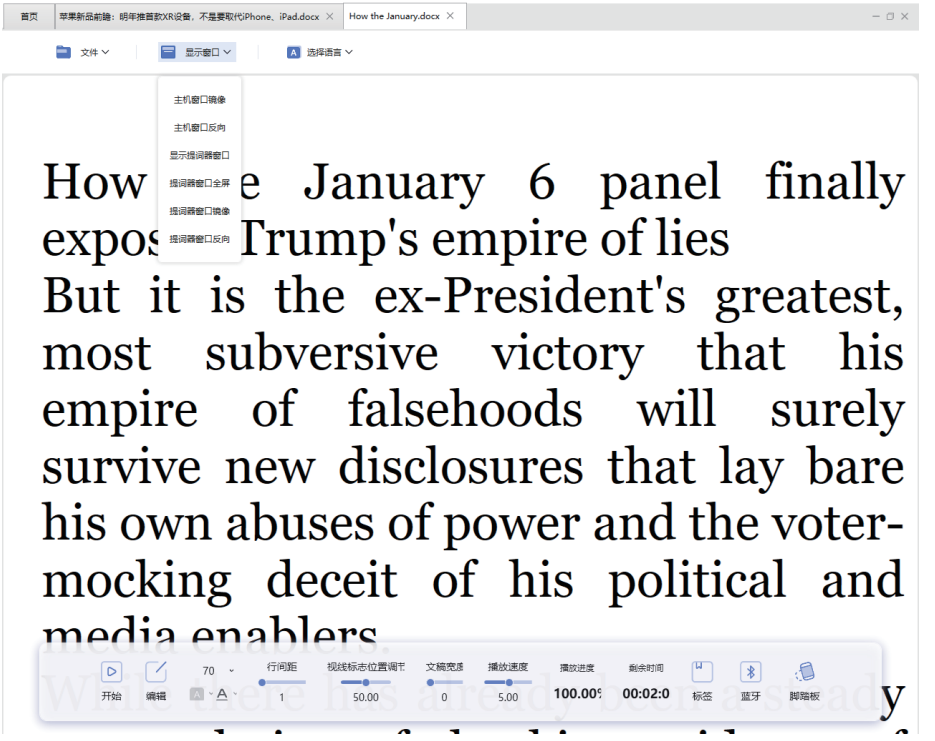

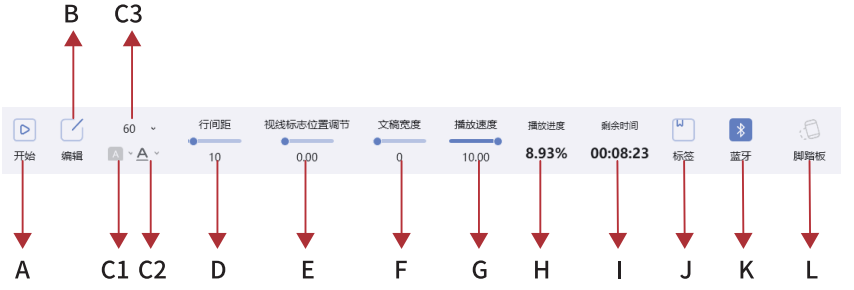

A:**暂停播放**

B:**在线编辑:**点击在线编辑,可以实时修改播音文件错误或者语序不通顺的文件,修改完毕,点击应用即可。

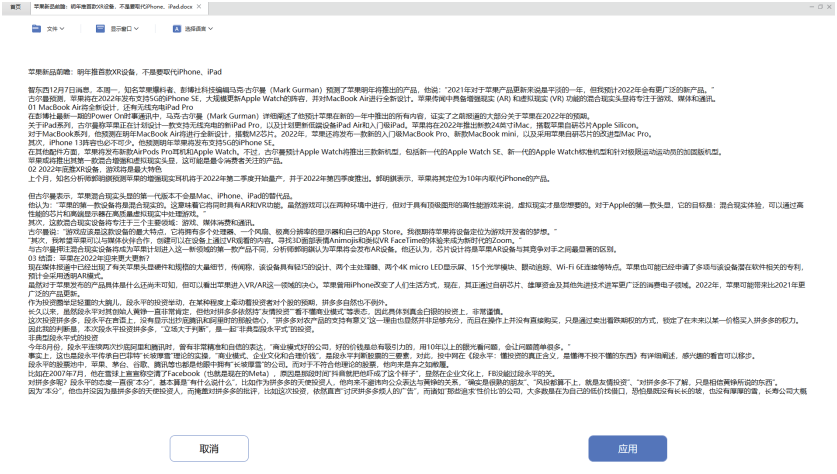

C1 :背景颜色编辑



C2 :字体颜色编辑



C3 :字体大小编辑

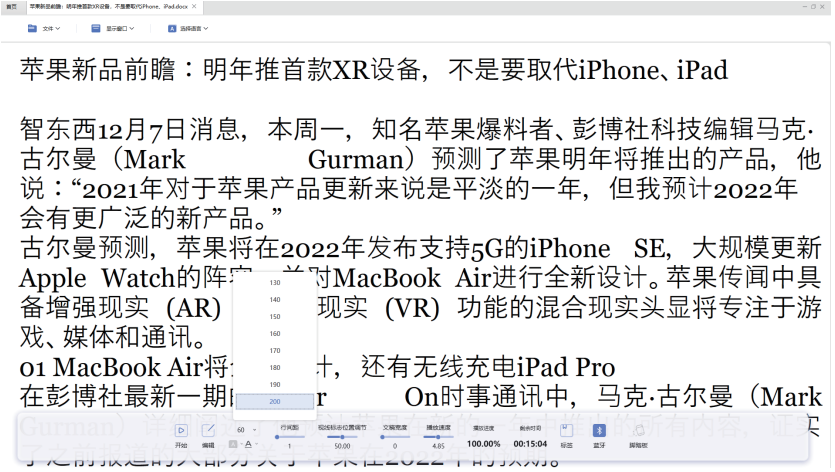

D:行间距

实时设置播音文稿字体行间距，行距是根据字体大小为基准的。

如下左图：字体大小：170，10倍行距



如下右图：字体大小：60，10倍行距



注：在行距相同的情况下，字体越大，显示字数越少。可根据播音人员视力调整字体大小，行距。

E:视线标志位置

视线标志可根据个人习惯调节位置



F:文稿宽度

文档宽度调节示意图



G:播放速度

播放速度：可通过鼠标或我司的无线遥控器加减播音文稿的速，鼠标单击键盘空格脚踏开关，无线遥控器播放暂停键可设置播音文稿暂停播放。



H:播放进度



I:剩余时间



J:标签



K:蓝牙连接标示



L:脚踏开关连接标示



遥控器说明



注意：因兼容问题，部分手机或平板遥控功能有些许差异。

蓝牙遥控器连接方法

1.开机：按住 键，直到指示灯亮起（约2秒钟），系统开机。（先装入电池）
2.关机：按住 键，直到指示灯熄灭（约5秒钟），系统关机。

注意：当开机后没有连接无线设备，5分钟后系统将自动关机；如果有连接无线设备，30分钟没有任何操作，系统也将自动关机

3.配对连接：开机后，LED指示灯将闪烁，自动进入无线配对模式，查找到本设备的地址及名称（ DESVIEW ），点击连接即可。连接成功后，LED指示灯熄灭。下次开机将自动连接到最后配对的无线设备。在关机状态下，开机时按住 键超过8秒钟，指示灯将闪烁，此时进入重新配对模式，将不会自动连接上次已配对设备。





常见问题

提词器在使用过程中出现的各类问题，您可以关注我司微信公众号，实时查看解决。

获取方式:

第一步:打开微信，在搜索框下面选择“公众号”，输入“百视悦Desview”点击关注公众号即可进入，您也可以通过扫描说明书后面的二维码,快速关注公众号。

第二步:在“百视悦Desview”公众号点击最左边的图标，在对话框输入“提词器问题”即可快速获取提词器常见使用问题的解决办法。