
VZ-FSM2x2

ViewZ Wall Mount Instruction Manual

For 43 ~ 55 " ViewZ Monitors | 99 lbs (45kg) per Monitor

VESA 100x100 ~ 600x400 Compatible

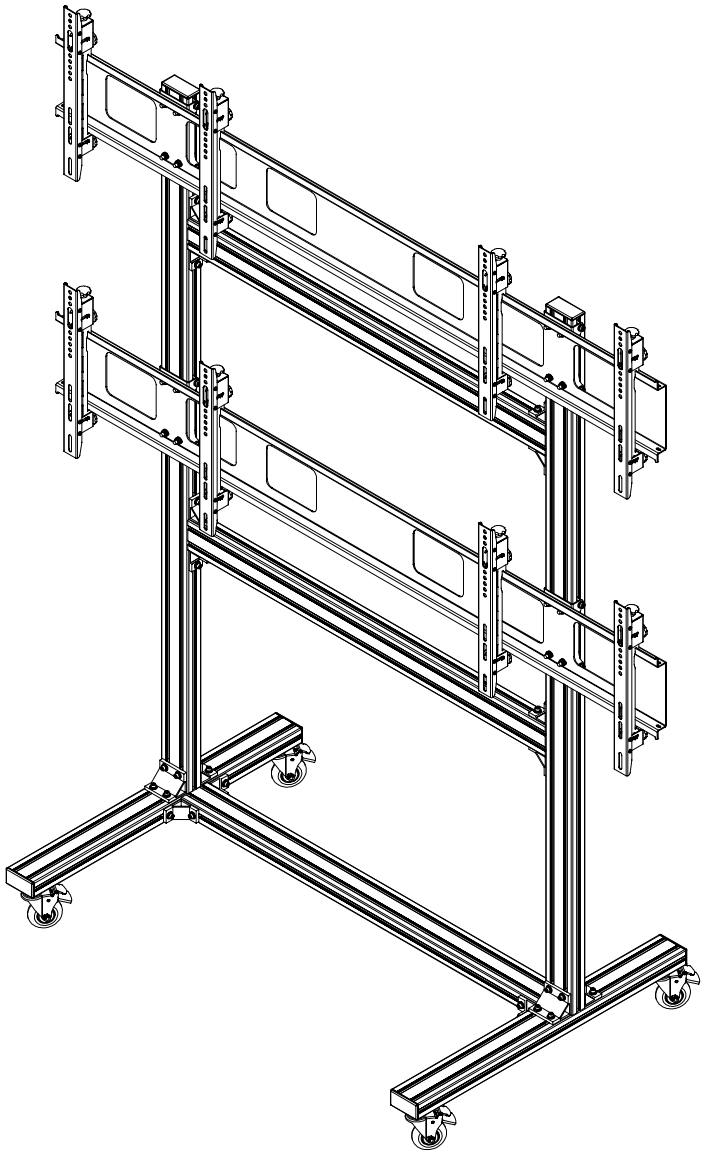






ViewZ®

www.viewzusa.com

Please read this manual thoroughly before use, and keep it handy for future reference.

Installation Tools

The following tools may be required depending on your installation.

 Electronic Stud Finder	 Pencil	 Protective Eye-wear	 Portable Drill	 1/8" Drill Bit
 3/8" Drill Bit	 Level	 ½˝ Socket	 Phillips Head Screwdriver	 Socket Wrench

Weight Limit

Maximum Flat-panel Weight: **99 lbs** per Monitor

THE WALL STRUCTURE MUST BE CAPABLE OF SUPPORTING AT LEAST FIVE TIMES THE WEIGHT OF THE FLAT-PANEL. IF NOT, THE WALL STRUCTURE MUST BE REINFORCED.

Warning Statements

PRIOR TO THE INSTALLATION OF THIS PRODUCT, THE INSTALLATION INSTRUCTIONS MUST BE READ AND COMPLETELY UNDERSTOOD. KEEP THESE INSTALLATION INSTRUCTIONS IN AN EASILY ACCESSIBLE LOCATION FOR FUTURE REFERENCE.

PROPER INSTALLATION PROCEDURE BY A QUALIFIED SERVICE TECHNICIAN MUST BE FOLLOWED, AS OUTLINED IN THESE INSTALLATION INSTRUCTIONS. FAILURE TO DO SO COULD RESULT IN PROPERTY DAMAGE, SERIOUS PERSONAL INJURY, OR EVEN DEATH.

SAFETY MEASURES MUST BE PRACTICED AT ALL TIMES DURING THE ASSEMBLY OF THIS PRODUCT. USE PROPER SAFETY EQUIPMENT AND TOOLS FOR THE ASSEMBLY PROCEDURE TO PREVENT PERSONAL INJURY.

ViewZ USA DOES NOT WARRANT AGAINST DAMAGE CAUSED BY THE USE OF ANY ViewZ USA PRODUCT FOR PURPOSES OTHER THAN THOSE FOR WHICH IT WAS DESIGNED OR DAMAGE CAUSED BY UNAUTHORIZED ATTACHMENTS OR MODIFICATIONS, AND IS NOT RESPONSIBLE FOR ANY DAMAGES, CLAIMS, DEMANDS, SUITS, ACTIONS OR CAUSES OF ACTION OF WHATEVER KIND RESULTING FROM, ARISING OUT OF OR IN ANY MANNER RELATING TO ANY SUCH USE, ATTACHMENTS OR MODIFICATIONS.

CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USERS AUTHORITY TO OPERATE THE EQUIPMENT.

At least two qualified people should perform the assembly procedure. Personal injury and/or property damage can result from dropping or mishandling the flat-panel.

If mounting to wall studs or ceiling studs, make sure that the mounting screws are anchored into the center of the wall studs or ceiling studs. Use of an edge-to-edge stud finder is recommended.

Using replacement parts or accessories other than from the manufacturer may void the warranty.

Be aware of the mounting environment. If drilling and/or cutting into the mounting surface, always make sure that there are no electrical wires in wall. Cutting or drilling into an electrical line may cause serious personal injury.


Make sure there are no water or natural gas lines inside the wall where the mount is to be located. Cutting or drilling into a water or gas line may cause severe property damage or personal injury.

This product is intended for indoor use only. Use of this product outdoors could lead to product failure and/or serious personal injury.

Do not install near sources of high heat. Do not install on a structure that is prone to vibration, movement or chance of impact.

Contact ViewZ with any questions: (888) 998-4399 | techsupport@viewzusa.com

Dimensions

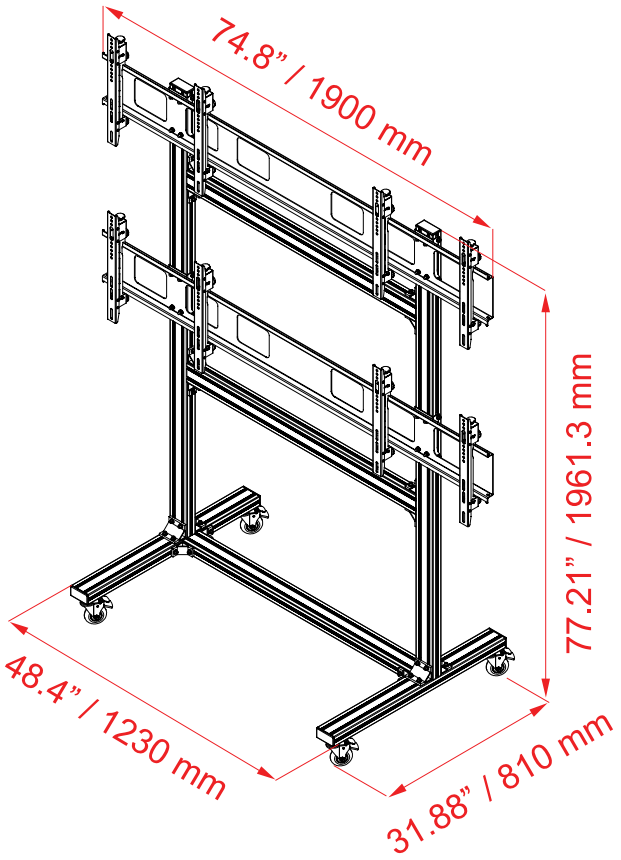


Wall Mount Assembly Components

Your ViewZ mount product is shipped with all proper installation hardware and components. If there are parts missing and/or damaged, please stop the installation and contact ViewZ USA at (888)-998-4399.

Left Monitor Bracket	Right Monitor Bracket	Wall Plate Adapter	4040 Corner	8080 Corner	End Cap	Universal Wheel	T-Nuts	Level
x4	x4	x4	x12	x12	x6	x4	x56	x1
Wall Plate		Upright			Beam	Base Bar	M6 Hexagon Wrench	M8 Nut Black
x2		x2			x3	x2	x1	x16
M6x12 White	M6x25 White	M8x12 White	M8x25 White	Ø6.2 x Ø16 x 1.5 Washer 2 Black	Ø17 x Ø9 x 14 Spacer Black	Combination Screw M8x20	Combination Screw M8x35	Ø8.2 x Ø16 x 1.5 Washer 1 Black
x16	x16	x16	x16	x16	x16	x54	x2	x16


Step 1 - Assemble the horizontal stand

① 

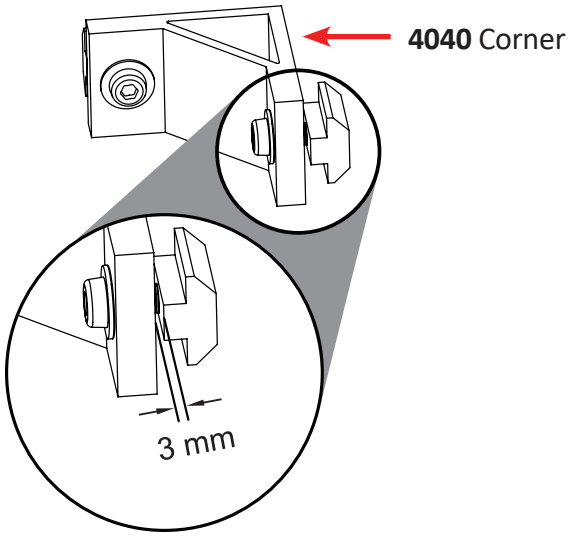

Don't overtighten the M8 screws,keep 3 mm gap between the nut and the corner.

② Adjust the direction of the "T" nut, put it into the transverse beam, align and then lock M8 screw with M6 hex wrench we provided.

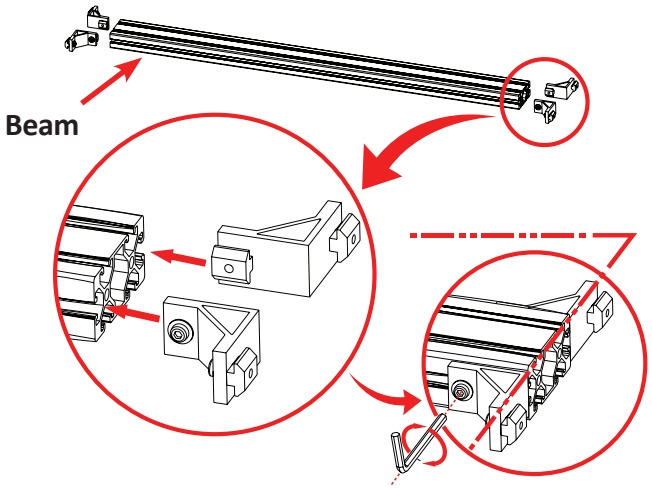


Align and then lock M8 screw with M6 hex wrench we provided.


③ Adjust the direction of the "T" nut, put it into the transverse beam, control the size 9.33" / 237.0 mm, align and then lock M8 screw with M6 hex wrench we provided.






Make the Combination Screw M8x35 screw through the hole in order to achieve the purpose of positioning.

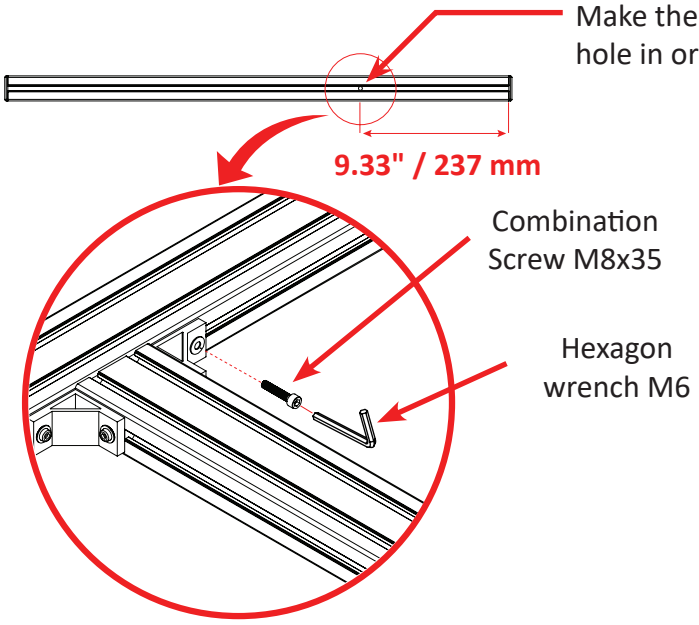

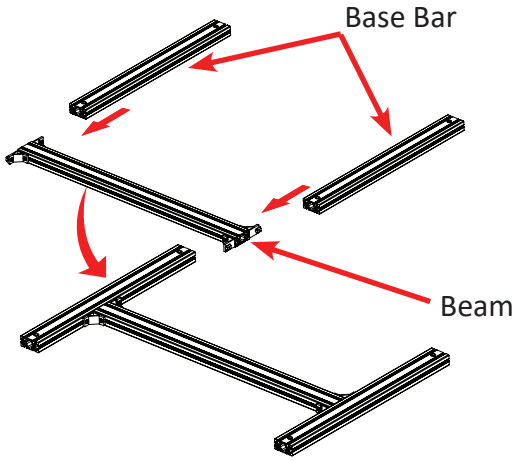

Step 2 - Assemble the vertical pole


④ Before installing the universal wheel, lock the wheel first, then install the 4 wheels according to clockwise direction as shown at pictures. Do not unlock after installation,so that it's easier for the following installation.

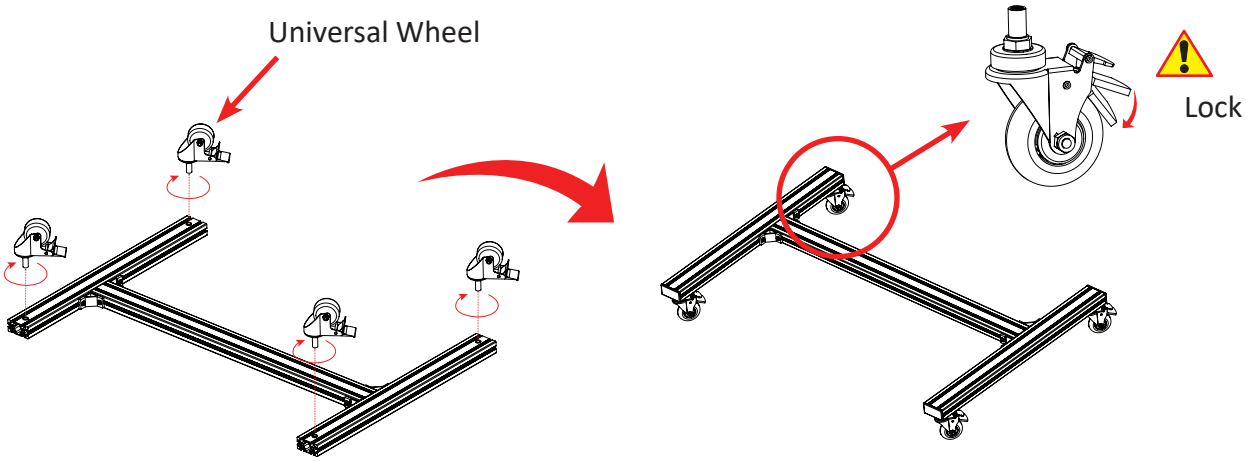

Turn over base


Turn base to normal

⑤ Install vertical aluminum extrusion, following step 2

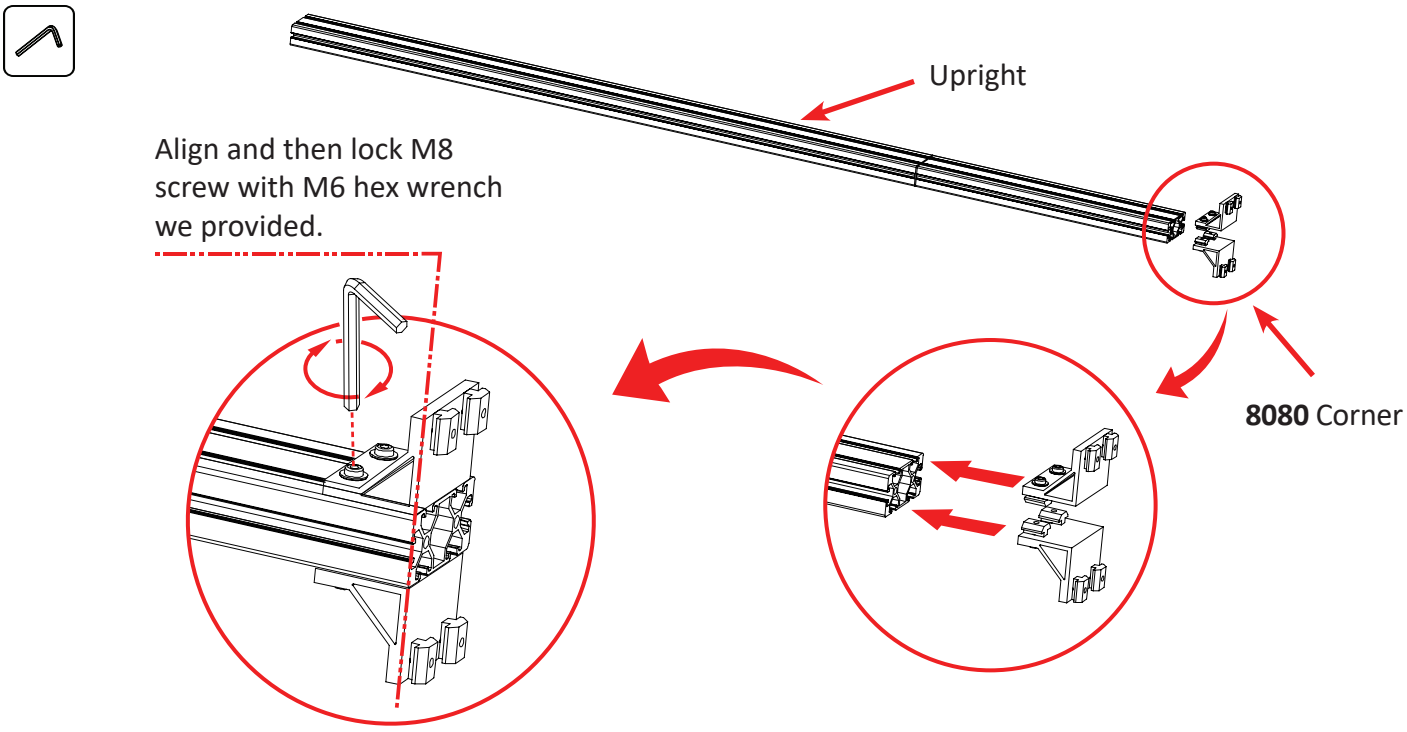


Step 3 - Build up the stand

⑥ Mounted vertical aluminum extrusion slide into the base, adjust the vertical aluminum extrusion aluminum extrusion with an intermediate base collinear.

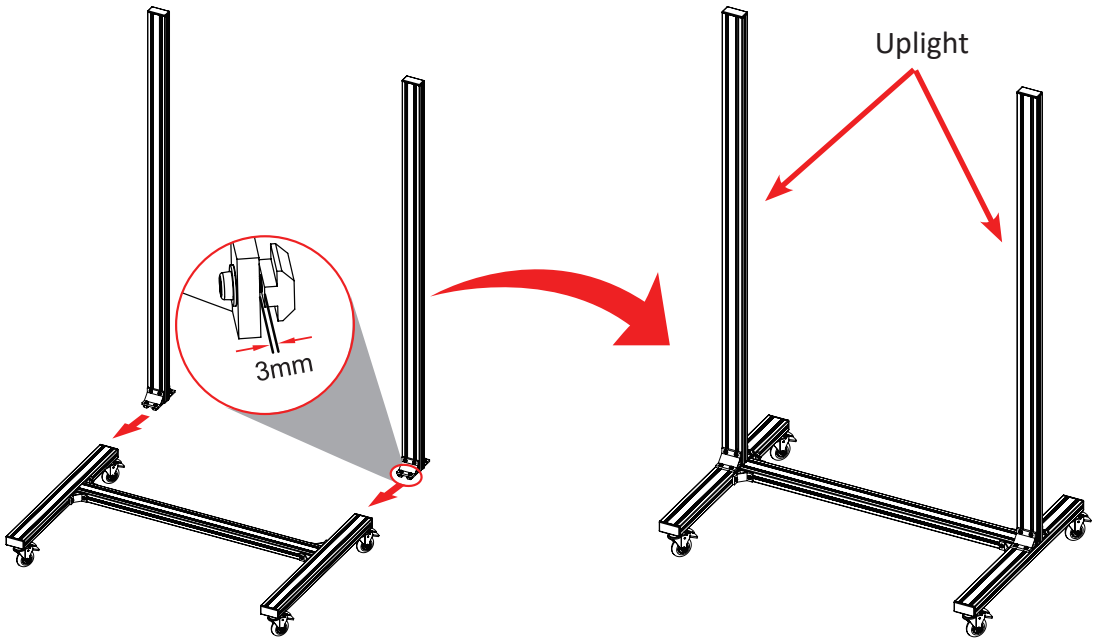


⑦ Install the second beam, refer to step 1 & 2, adjust the gap size of 26.37" / 670.0 mm.

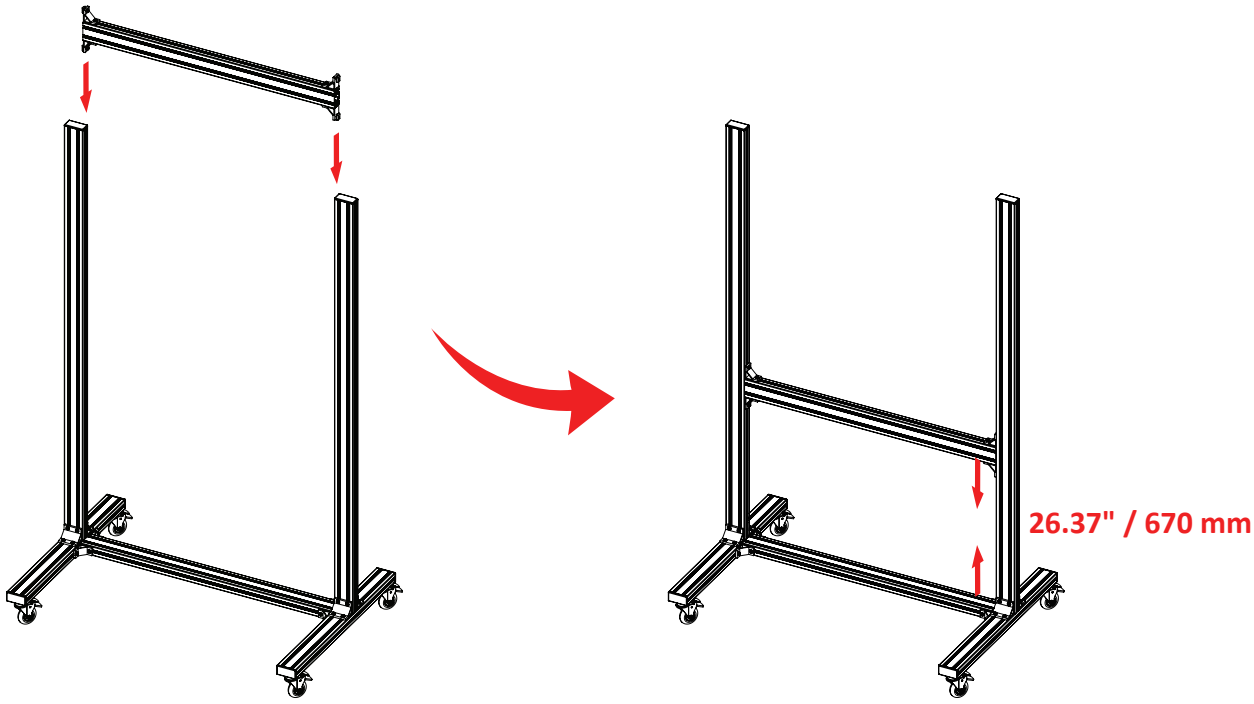


Step 3 - Build up the stand & mount bracket

⑧ Install wall plate adapter, refer to step 1 & 2.

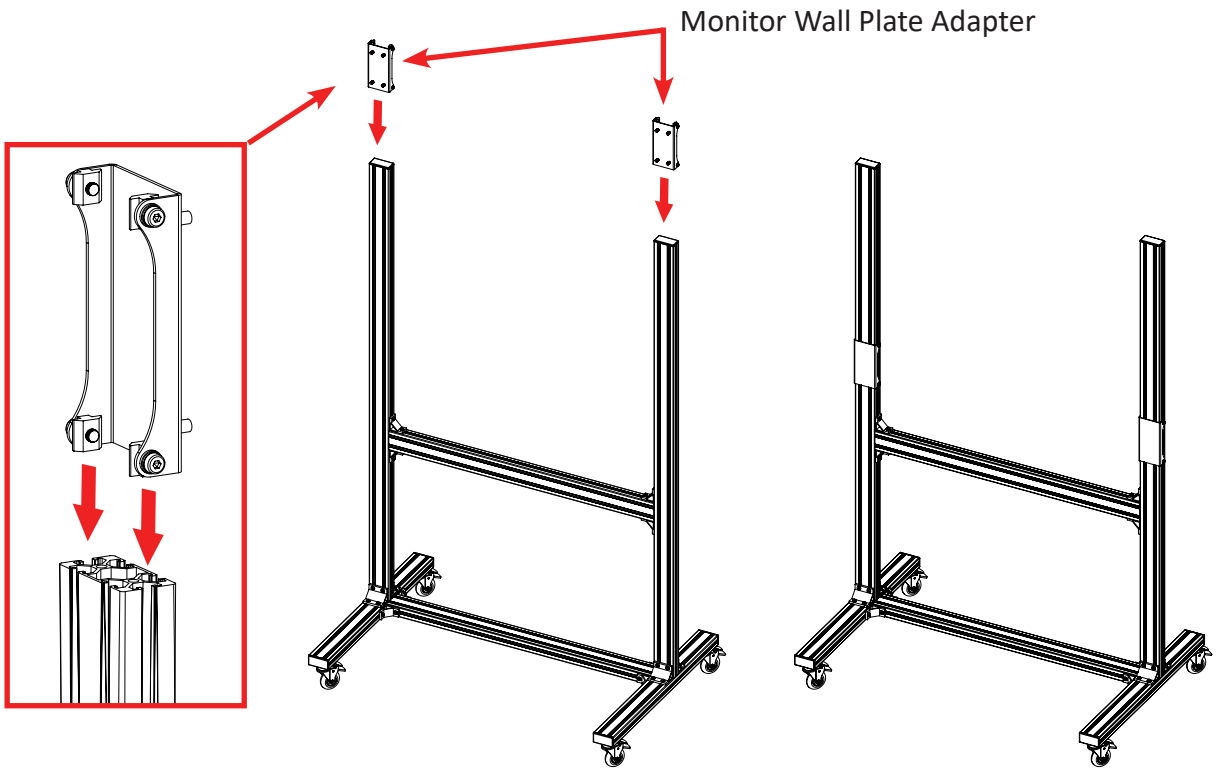


⑨ Extended panel installation, since the panel is relatively heavy, need 2 people carrying both ends to maintain a balance when tightening the nuts.

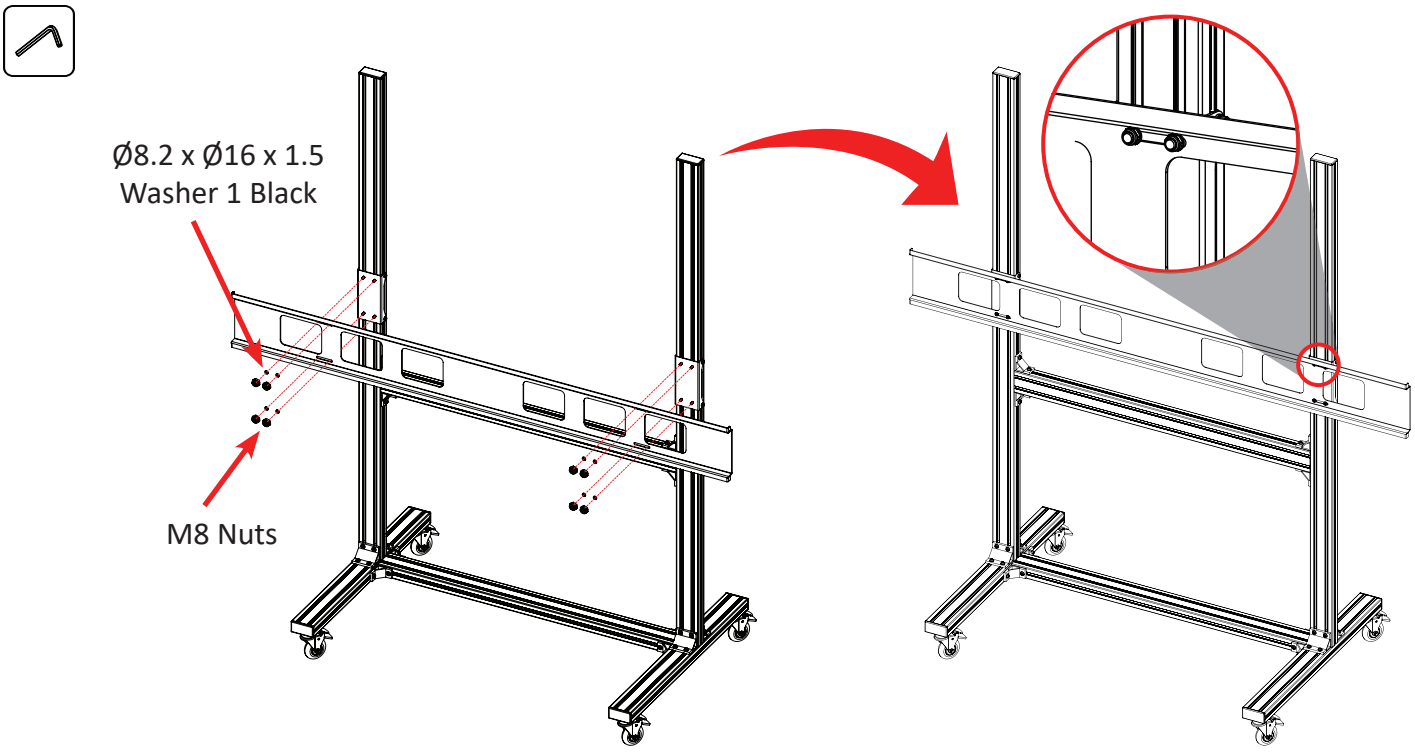


Step 4 - Install monitor to the mount

⑩ Repeat steps 7, 8 & 9 installation method to install a third aluminum extrusion and the second panel.

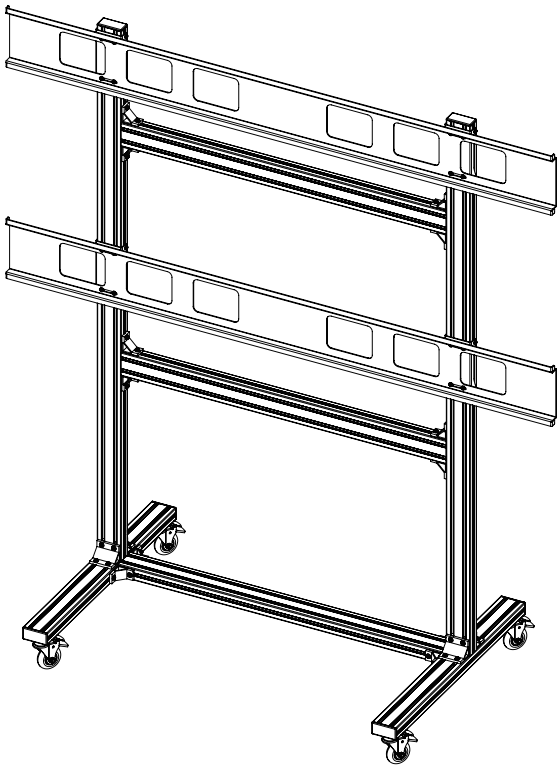


⑪ After 2 panels installed, according to the width of the ViewZ monitor to adjust the distance between the 2 panels, the distance between the 2 panels is equal to the width of the ViewZ monitor.

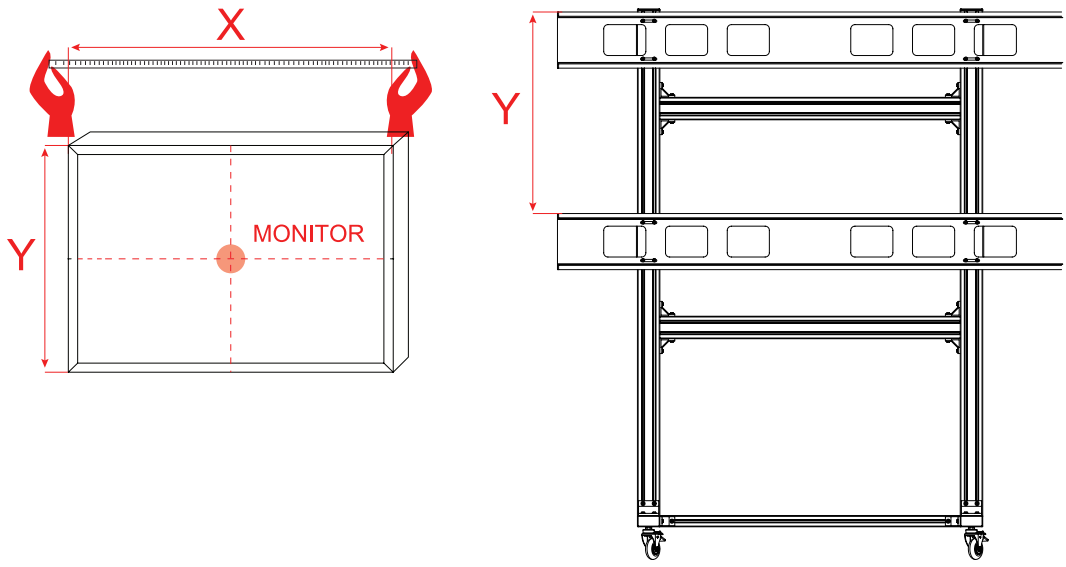


Step 4 - Install monitor to the mount

⑫ Attach the interface arms to the flat screen.

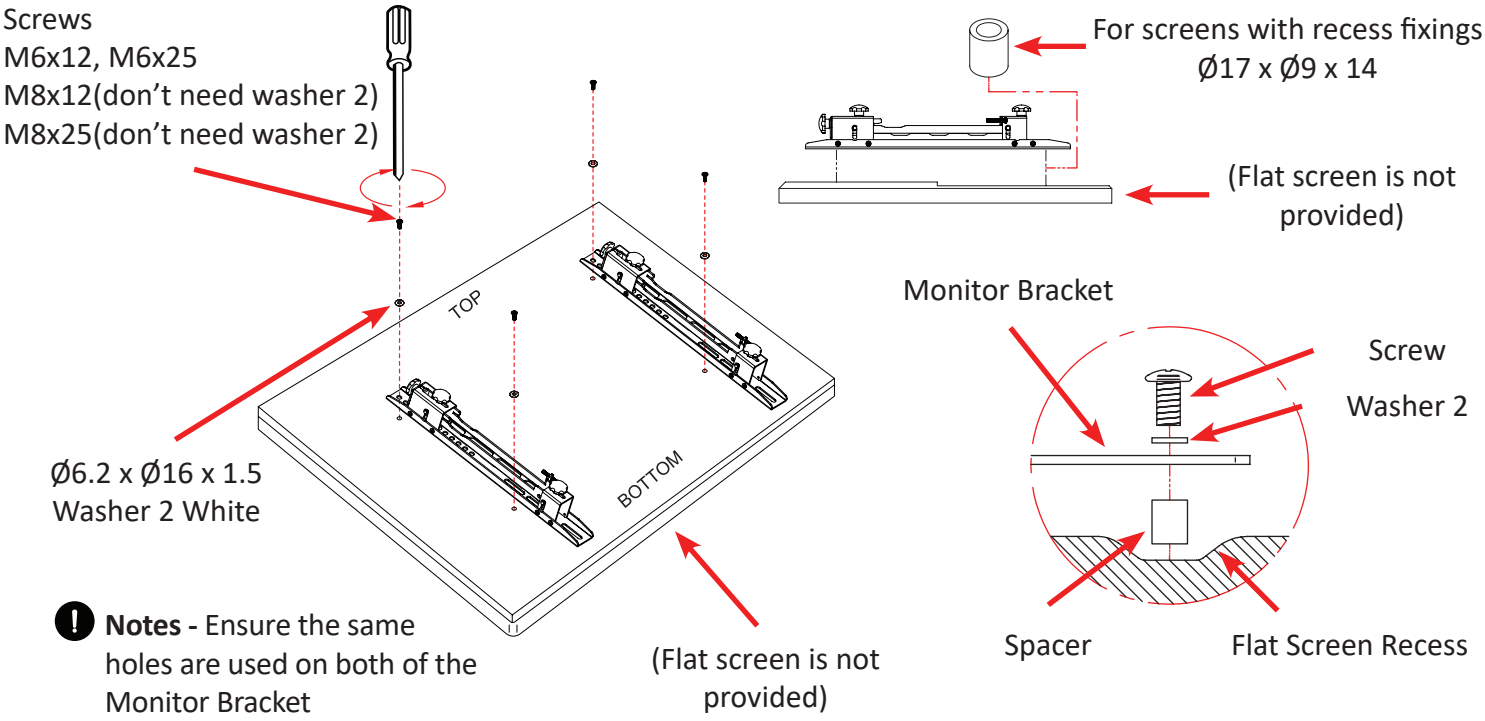


Notes - Ensure the same holes are used on both of the Monitor Bracket

⑬ Hook the monitor with interface arms onto the mount

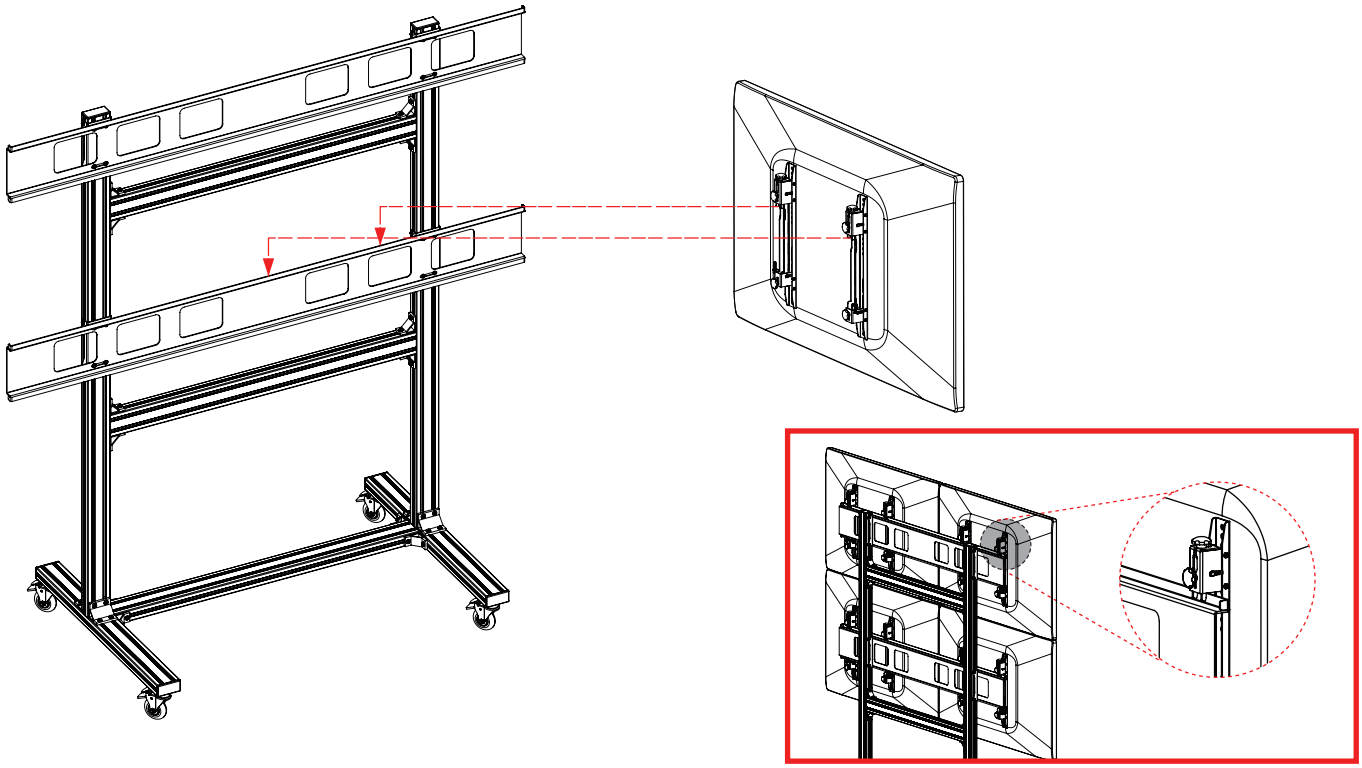


Step 5 - Adjust the vertical position, distance & tilt

⑭ Secure the interface arms to the mount using

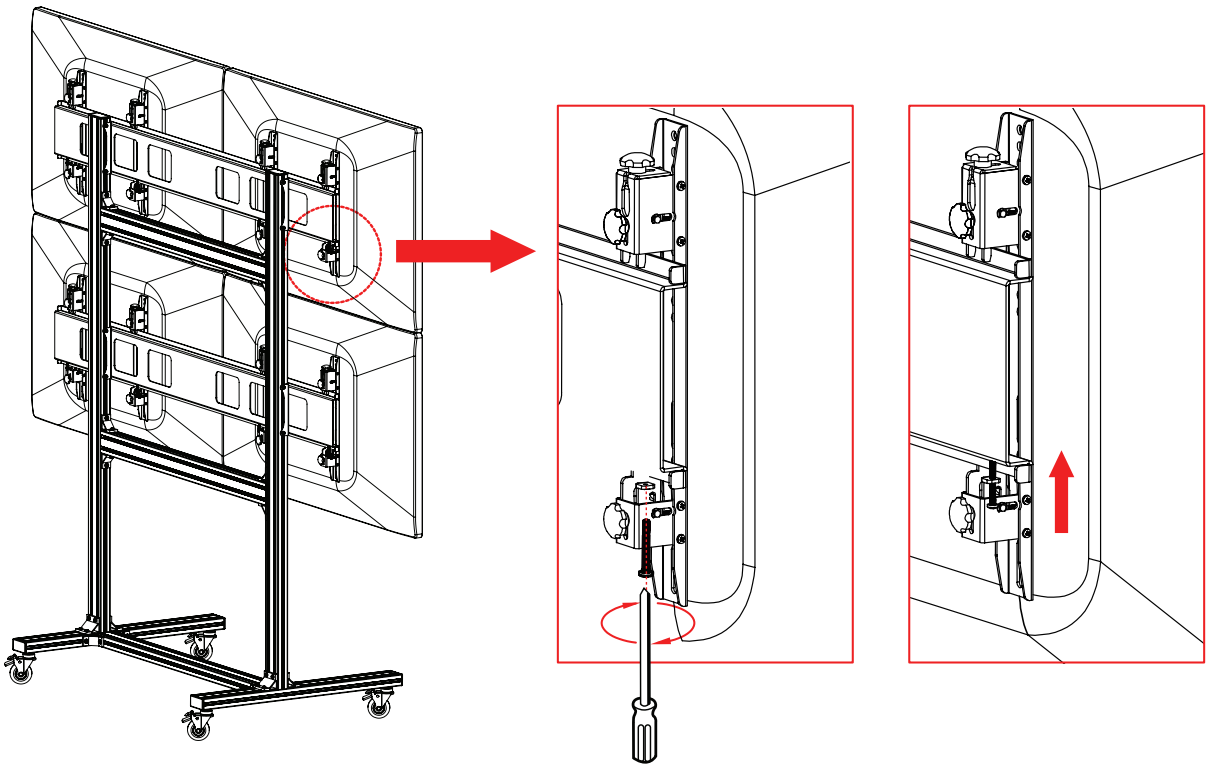



⑮ Each monitor bracket has independent front & back up & down adjustment function, the adjustment amplitude is 15 mm.

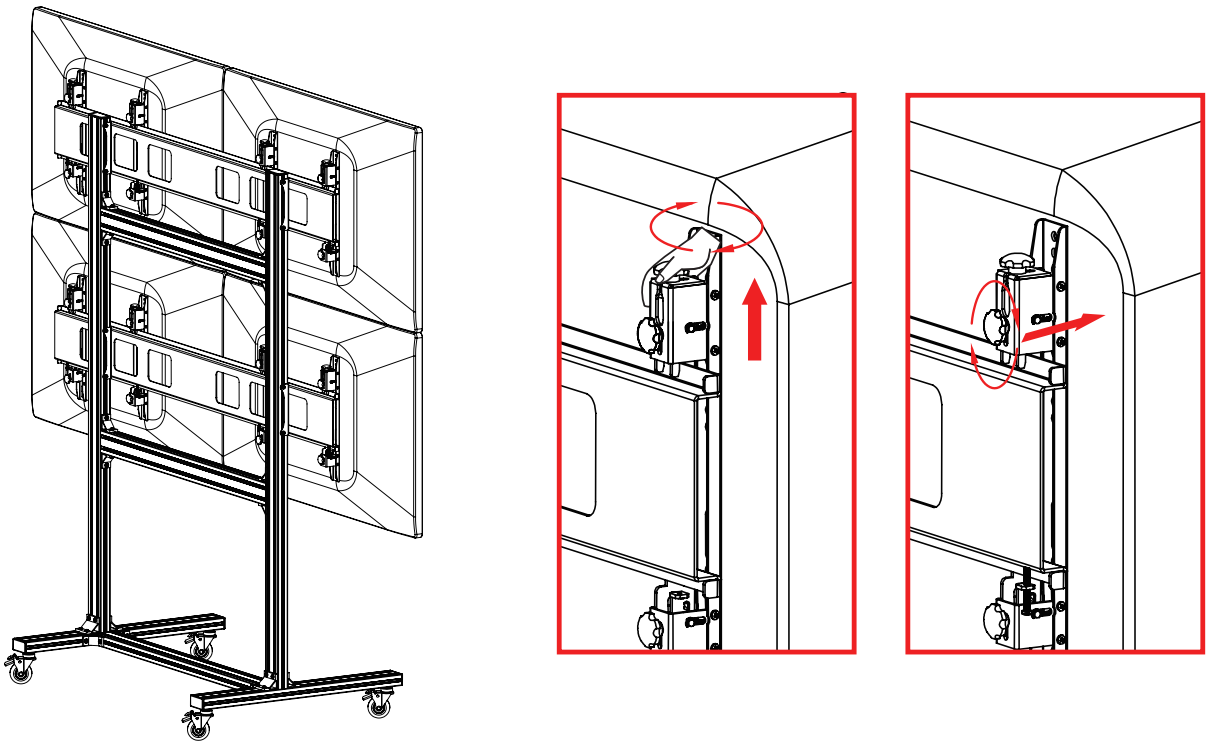

Step 5 - Adjust the vertical position, distance & tilt

⑯ Tighten the screws in various parts. Don’t forget to put the end caps on, don’t use too much strength which might damage mount or monitors.

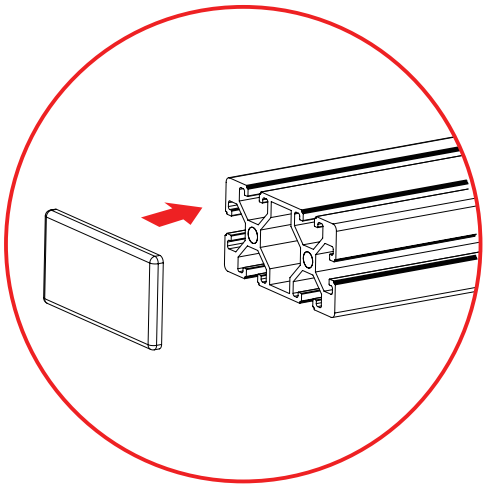

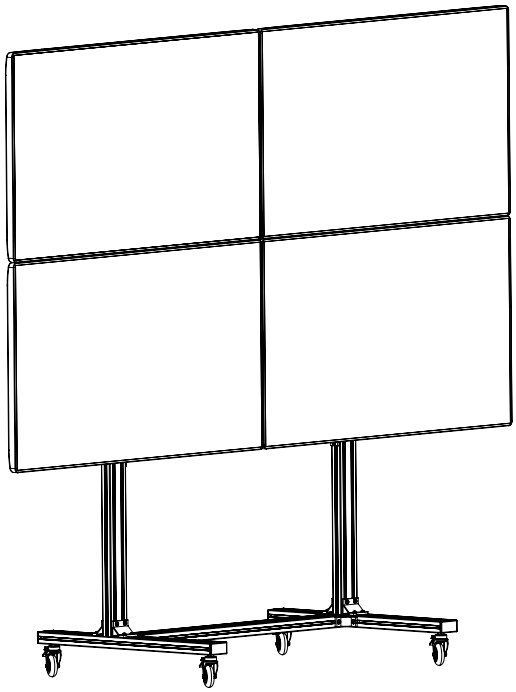

Warranty

ViewZ USA
LIMITED WARRANTY

What and Who is Covered by this Limited Warranty and for How Long
ViewZ USA warrants this product to be free from defects in material and workmanship of the original owner of this product. The limited warranty is valid only for the original purchaser of the product.

What ViewZ USA Will Do
At the sole option of ViewZ USA, ViewZ USA will repair or replace any product or product part that is defective. If ViewZ USA chooses to replace a defective product or part, a replacement product or part will be shipped to you at no charge, but you must pay any labor costs.

What is Not Covered; Limitations
ViewZ USA DISCLAIMS ANY LIABILITY FOR DAMAGE TO MOUNTS, ADAPTERS, DISPLAYS, PROJECTORS, OTHER PROPERTY, OR PERSONAL INJURY RESULTING, IN WHOLE OR IN PART, FROM IMPROPER INSTALLATION, MODIFICATION, USE OR MISUSE OF ITS PRODUCTS.

ViewZ USA DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. ViewZ USA IS NOT RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING BUT NOT LIMITED TO, INABILITY TO USE ITS PRODUCTS OR LABOR COSTS FOR REMOVING AND REPLACING DEFECTIVE PRODUCTS OR PARTS. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU.

What Customers Must Do for Limited Warranty Service
If you discover a problem that you think may be covered by the warranty you MUST REPORT it in writing to the address below within thirty (30) days. Proof of purchase (an original sales receipt) from the original consumer purchaser must accompany all warranty claims. Warranty claims must also include a description of the problem, the purchaser's name, address, and telephone number. General inquiries can be addressed to ViewZ USA Customer Service at 1-888-998-4399. Warranty claims will not be accepted over the phone or by fax.

ViewZ USA
Attn: Warranty Claim
1030 N ARMANDO ST.,
ANAHEIM, CA 92806

How State Law Applies
THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

Disclaimer

ViewZ USA intends to make this manual accurate and complete. However, ViewZ USA makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. ViewZ USA makes no representation of warranty, expressed or implied, regarding the information contained herein. ViewZ USA assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Contact Us

NORTH AMERICA
1030 N ARMANDO ST.,
ANAHEIM, CA 92806
USA and Canada
Phone: 1-888-998-4399
Fax: 1-714-996-1138
Other Locations
Phone: (001) 888-998-4399
Fax: (001) 714-996-1138

© ViewZ USA